




- 01 - - 02 - - 03 - - 04 - - 05 - - 06 - - 07 - - 08 -

Pumps

- Vertical In-line Pump
- Bare Shaft End Suction Centrifugal Pump



HISTORY

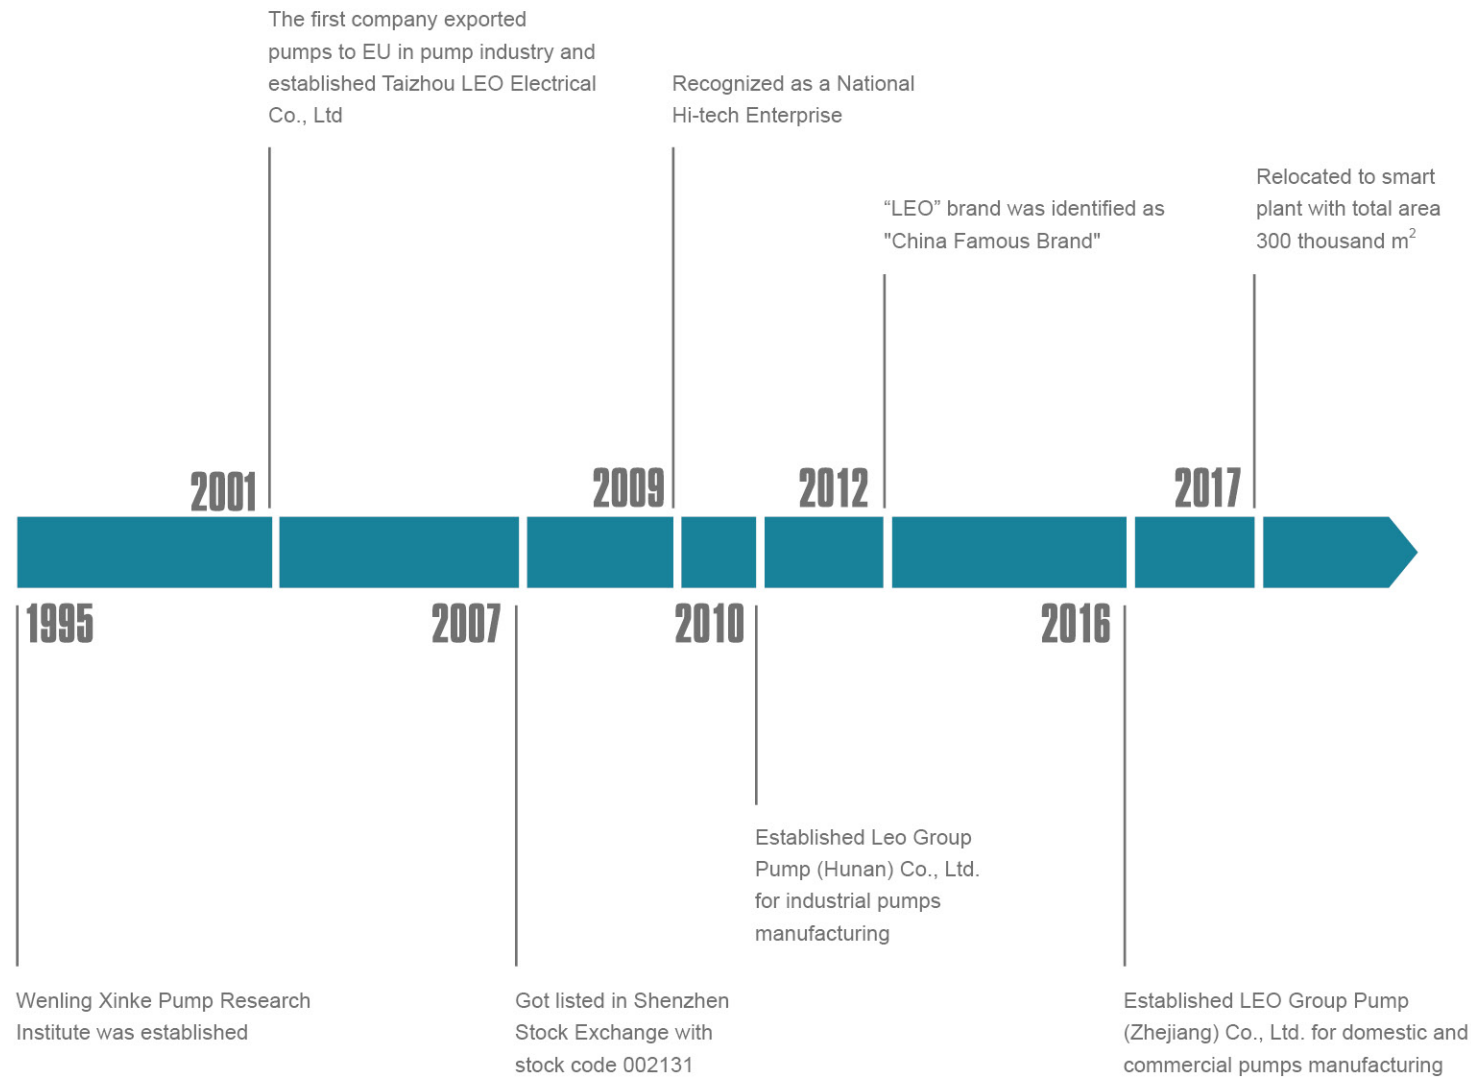

TO KNOW LEO

LEO Group (got listed in Shenzhen Stock Exchange with stock code 002131) is a national high-tech enterprise engaged in R&D, design, manufacture, sales and service of all series pumps and systems. LEO is the first listed company in Chinese pump industry, one of the drafters of pump industry standard and the vice president of drainage and irrigation machinery branch of China Agricultural machinery industry association as well. "LEO" has been identified as "China Famous Brand" by the State Administration of Industry and Commerce. It is mentionable that LEO has the only state-authorized technical center in pump industry.

We have set up many production and sales subsidiaries in key regional markets such as America, Hungary, Belgium, Thailand, Indonesia, United Arab Emirates and Bangladesh and authorized exclusive distribution agency in over 100 countries.

Our products have been sold to over 120 countries and regions, such as Europe, North America, Central & South America, Southeast Asia, Middle East, Africa, Oceania, etc., which play a crucial role in water conservancy, water resources, electric power construction, petrochemical industry, mining, metallurgy, fire-fighting, HVAC (Heating, Ventilation and Air Conditioning), agricultural irrigation, civil water supply and drainage, etc.

LEO has currently two industrial groups respectively for industrial and civilian applications. With four manufacturing bases in Wengling of Zhejiang, Xiangtan of Hunan, Wuxi of Jiangsu and Dalian of Liaoning, LEO possesses a solid foundation to become a world-class pump and system solution provider rapidly.

With over 70 years' professional technology, LEO will continue her consistent creativity and development ability in each pump for human's health.



NUMEROUS MEMBERS, ONE FAMILY

Based on market segment, LEO's pump business is divided into 5 fields, namely water conservancy & water resources, power station, petrochemical industry, mining & metallurgical industry and civilian applications. For each field there's a professional manufacturing base with relevant professional sales teams. Three subsidiary companies, Wuxi LEO Xi Pump, LEO Group Pump (Hunan) and Dalian LEO Pump are all well-known industrial pump manufacturers in their own fields. With over 70 years' industrial pump manufacturing experience and extraordinary comprehensive strength, LEO has become a leading company among all industrial pump manufacturers in China.



Pump Manufacturing Base for Domestic and Commercial Applications (Wenling City, Zhejiang Province)

LEO Group Pump (Zhejiang) Co., Ltd, a wholly-owned subsidiary of LEO Group Co., Ltd, is the core base for R&D, manufacturing, sales and service of domestic and commercial pumps for family water supply, pipeline boosting, garden and field irrigation, HVAC, etc.

The leading products include peripheral pump, jet pump, centrifugal pump, garden submersible pump, fountain pump, pool pump, doestic lifting station, gasoline engine pump, diesel engine pump, submersible pump, submersible borehole pump, submersible sewage pump, stainless steel vertical multistage pump, etc.

The product range covers 15 series with over 2,000 specifications, which are well sold in more than 120 countries and regions. The base has established steady cooperative relationships with world-class pump manufacturers, importers, dealers and hypermarkets.



Pump Manufacturing Base for General Industrial Pumps (Xiangtan City, Hunan Province)

Established in 2010, LEO Group Pump (Hunan) Co., Ltd. is a wholly-owned subsidiary by LEO Group Co., Ltd. Located in Jiuhua Economic Development Zone of Xiangtan City, Hunan Province. Covers an area of 85,000m² and construction area is about 92,635 m² with total investment of approximately 74 million dollars. It is the most important R&D, manufacturing and testing center of LEO Group. The leading products include large mixed flow and axial flow pump (vertical, horizontal, oblique, tubular, submersible etc.), double-suction centrifugal pump, multistage centrifugal pump, slurry pump, desulphurization pump and submersible centrifugal pump. Products are mainly used in mine, metallurgy, coal washing, FGD, municipal water etc.



Pump Manufacturing Base for Water Conservancy & Water Resources (Wuxi City, Jiangsu Province)

Formerly known as Wuxi Xi Pump Manufacturing Co., Ltd., a well-known manufacturer of water conservancy, is specialized in large and medium-sized pumps production for urban water supply and drainage, farmland irrigation, water conservancy projects and large water diversion project. The main products cover 32 series with nearly 1000 specifications. Products exported to more than 20 countries in Asia, Latin-America, Europe and Oceania.

As a main supplier, the base provides large pumps for South-to-North Water Diversion Project—a national key project. There are over 140 technicians, including 1 professor level senior engineer, 16 senior engineers, and 39 engineers.



Pump Manufacturing Base for Petrochemical Industry (Dalian City, Liaoning Province)

It is the pump manufacturing base for petrochemical industry, combined with Dalian LEO Huaneng Pump Co., Ltd and LEO (Dalian) Industrial Pump Technology Center Co., Ltd.

Formerly known as Dalian Huaneng Corrosion-Resistant Pump Works, the base is specialized in production of petrochemical pumps for crude oil transportation, crude oil refinery, heavy chemical industry, coal chemical industry and fine chemistry, etc. The base focuses on design and manufacture of 30 series (OH, BB, VS, etc.) of petrochemical pumps with over 3000 specifications, which are in accordance with API and ISO standard.

LEO (Dalian) Industrial Pump Technology Center Co., Ltd. is one of the research branch of national level technology center for petrochemical pumps, specializes in R&D, design of pumps of petro chemistry, coal chemical industry, long-distance transport pipes, energy resources, fine chemicals industry, etc. Design and develop software and large laboratories, explore liquid transport schemes under severe conditions and solve the difficult projects of ultralow temperature, high temperature, high pressure, low cavitation, highly corrosive, energy recovery, etc.



Application

- HVAC: Circulation of hot water, boiler mix-flow, temperature mix-flow, intermittent heat supply, etc
- Air conditioning system: Cooling water circulation
- Water supply system: Filtration and transfer at waterworks; Pressure boosting in main pipe
- Industrial applications: Washing & cleaning systems, boiler feeding, cooling water circulation, water treatment systems, and auxiliary systems
- Fire-fighting system

Pump

- Flow: up to 760 m³/h
- Head: up to 85 m
- Power range: 0.37 – 132 kW
- Liquid temperature: 0°C – +90°C
- Max ambient temperature: + 40°C
- Altitude: up to 1000 m

Max.Working Pressure

LPP32~LPP80 LPP100-50-22/2 & it's cutted impeller models LPP100-80-37/2 & it's cutted impeller models LPP125-50-30/2 & it's cutted impeller models LPP150-21-18.5/4 & it's cutted impeller models LPP150-50-45/4 & it's cutted impeller models LPP200-18-18.5/4 & it's cutted impeller models	16bar
Other models between LPP100~LPP250	10bar for Standard configuration 16bar available on request


Motor

- Closed construction
- Insulation class: F
- Protection class: IP 55
- IE 2 motor as standard. IE 3 motor is available on request

Flange

- EN 1092 and DIN 2576 standard

Identification Codes

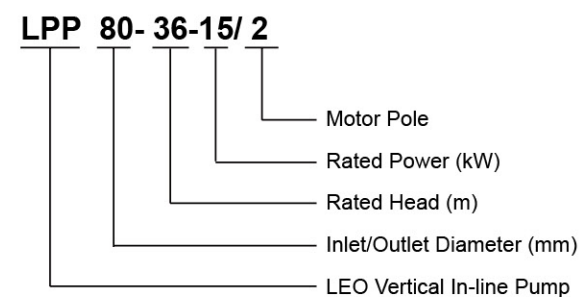



Materials Table

No.	Part	Materials
1	Pump body	Cast iron
2	Impeller	Cast iron / AISI304
3	Mechanical seal	Carbon / Cast iron / AISI304
4	Pump shaft	Steel/AISI 304
5	Clamp ring	Steel
6	Motor base	Cast iron
7	Motor	

* Cast iron impeller as standard, AISI304 impeller is available for models that marked with※



How to Read The Curve Charts

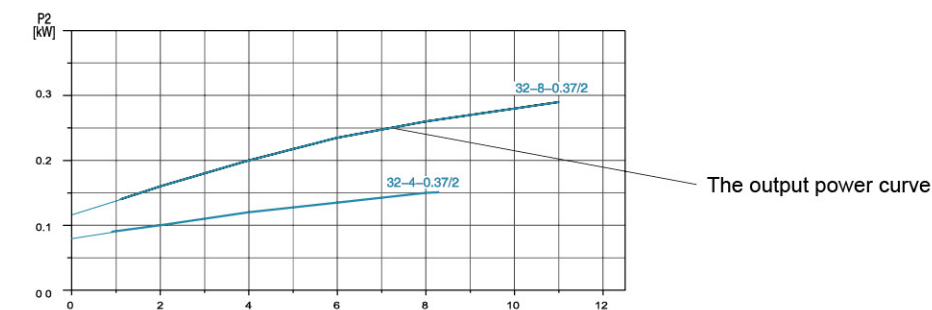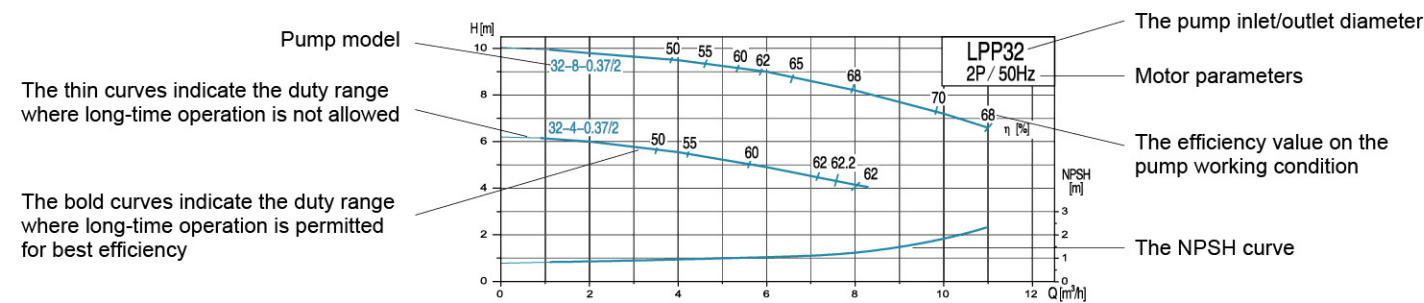


Guidelines to Performance Curves

Tolerances to ISO 9906, Annex A. Measurements have been made with airless water at a temperature of 20°C and kinematic viscosity of 1mm²/s. To avoid overheating of the motor, the pump should not be use against a high head for a long time.

Ambient Temperature

Max. Ambient temperature: +40°C. Ambient temperature above 40°C, or installation at altitude of more than 1000 m above sea level, require the use of an oversize motor. Because of low air density and poor cooling effects, the motor output power P2 will be decreased. See the picture.

For example, when the pump is installed at altitude of more than 3500 m above sea level, P2 will be decrease to 88%. When the ambient temperature is 70°C, P2 will be decreased to 78%.

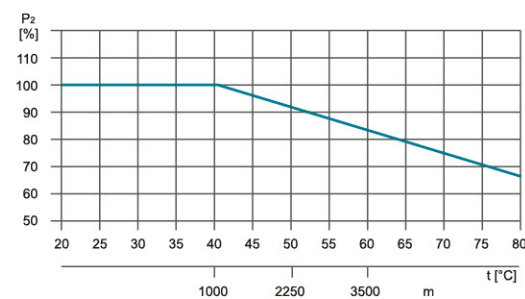



Model	Power P2 (kW)	Rated Speed n (r/min)	Rated Flow Q (m³/h)	Rated Head (m)	Max. Flow Q (m³/h)	Max. Head H(m)	NPSHc (m)
△ LPP32-8-0.37/2**	0.37	2900	8.5	8	11	10	2
LPP32-4-0.37/2**	0.37	2900	7.5	4	8.5	6	2
△ LPP32-31-3/2	3	2900	20	31	24	37	2
LPP32-26-2.2/2	2.2	2900	18	26	21	32	2
LPP32-21-1.5/2	1.5	2900	14	21	18.5	26	2
LPP32-16-1.1/2	1.1	2900	12	16	16	20	2
△ LPP32-50-5.5/2*	5.5	2900	12.5	50	20	53.5	2.5
LPP32-40-4/2*	4	2900	12.5	40	20	46	2.5
△ LPP40-20.5-1.5/2	1.5	2900	12	20.5	20	25	2
LPP40-17.5-1.1/2	1.1	2900	12	17.5	18	21	2
LPP40-13-0.75/2	0.75	2900	10	13	15.5	16.5	2
△ LPP40-31-4/2	4	2900	26	31	38	35	2
LPP40-24.5-3/2	3	2900	24	24.5	36	28	2
LPP40-20.5-2.2/2	2.2	2900	23	20.5	35	25	2
△ LPP50-24-3/2	3	2900	30	24	36	29	2
LPP50-21-2.2/2	2.2	2900	24	21	35	25	2
LPP50-16-1.5/2	1.5	2900	22	16	32	19	2
LPP50-12-1.1/2	1.1	2900	20	12	26	15	2
△ LPP50-34-5.5/2	5.5	2900	35	34	50	42	2
LPP50-28-4/2	4	2900	30	28	43	33	2
△※ LPP50-50-5.5/2*	5.5	2900	12.5	50	26	54	5
※ LPP50-40-4/2*	4	2900	12.5	40	26	42	5
※ LPP50-35-3/2*	3	2900	12.5	35	20	40	5
△ LPP50-80-11/2*	11	2950	12.5	80	26	81.5	2.5
LPP50-70-7.5/2*	7.5	2950	12.5	70	20	73	2.5
LPP50-60-7.5/2*	7.5	2950	12.5	60	20	63	2.5
△ LPP50-81-22/2	22	2950	50	81	59	88	4.8
LPP50-70-18.5/2	18.5	2950	50	70	59	78	4.8
LPP50-60-15/2	15	2950	50	60	59	67	4.8
△※ LPP65-35-7.5/2	7.5	2900	55	35	70	39	2.5
※ LPP65-28-5.5/2	5.5	2900	50	28	70	30	2.5
※ LPP65-21-4/2	4	2900	45	21	60	24	2.5
※ LPP65-17-3/2	3	2900	40	17	56	20	2.5
※ LPP65-14-2.2/2	2.2	2900	35	14	50	17	2
△ LPP65-56-18.5/2	18.5	2950	70	56	86	61	3
LPP65-49-15/2	15	2950	65	49	80	53	3
LPP65-40-11/2	11	2950	56	40	80	43	2.5
△ LPP80-20-5.5/2	5.5	2900	70	20	90	25	3.5
LPP80-17-4/2	4	2900	64	17	79	21	3.2
LPP80-14-3/2	3	2900	55	14	75	17	3
LPP80-10.5-2.2/2	2.2	2900	52	10.5	70	14	3
LPP80-8.5-1.5/2	1.5	2900	45	8.5	65	10.5	3
△※ LPP80-35-15/2	15	2950	110	35	130	42	4.5
※ LPP80-28-11/2	11	2950	100	28	125	35	4.5
※ LPP80-21.5-7.5/2	7.5	2950	90	21.5	119	28	4
△※ LPP80-80-22/2	22	2950	50	80	70	86	2.8
※ LPP80-70-18.5/2	18.5	2950	45	70	65	75	2.8
※ LPP80-60-15/2	15	2950	40	60	60	63	2.8
△※ LPP100-32-22/2	22	2950	170	32	190	43	6.5
※ LPP100-30-18.5/2	18.5	2950	160	30	179	38	6.5
※ LPP100-24-15/2	15	2950	150	24	180	31	6.5
※ LPP100-20-11/2	11	2950	135	20	175	28	6.5
△ LPP100-80-37/2	37	2950	100	80	130	86	3.5
LPP100-70-30/2	30	2950	90	70	120	76	3.5

Model	Power P2 (kW)	Rated Speed n (r/min)	Rated Flow Q (m³/h)	Rated Head (m)	Max. Flow Q (m³/h)	Max. Head H(m)	NPSHc (m)
LPP100-60-22/2	22	2950	80	60	96	64	3.5
△ LPP100-50-22/2	22	2950	100	50	140	56	3.5
LPP100-44-18.5/2	18.5	2950	90	44	140	47	3.5
LPP100-38-15/2	15	2950	85	38	130	43	3.5
△※ LPP125-50-30/2	30	2950	160	50	190	58	5.5
※ LPP125-44-30/2	30	2950	150	44	190	52	5.5
※ LPP125-37.5-22/2	22	2950	135	37.5	180	45	5.5
△ LPP80-28-11/4	11	1480	90	28	120	31	2
LPP80-22-7.5/4	7.5	1480	80	22	100	24	2
LPP80-19-5.5/4	5.5	1480	68	19	80	21.5	2
△※ LPP100-32-22/4	22	1480	170	32	213	36	2
※ LPP100-30-18.5/4	18.5	1480	160	30	208	33	2
※ LPP100-25-15/4	15	1480	155	25	186	28	2
※ LPP100-21-11/4	11	1480	130	21	170	23	2
※ LPP100-16-7.5/4	7.5	1480	115	16	150	19	2
△※ LPP125-35-30/4	30	1480	200	35	279	40	2.5
※ LPP125-31-22/4	22	1480	170	31	260	34	2
※ LPP125-28-18.5/4	18.5	1480	155	28	249	30	2
※ LPP125-24-15/4	15	1480	140	24	230	27	2
※ LPP125-19-11/4	11	1480	125	19	209	22	2
△※ LPP150-33-37/4	37	1480	300	33	390	37	3.5
※ LPP150-29-30/4	30	1480	280	29	360	32	3.5
※ LPP150-24.5-22/4	22	1480	250	24.5	324	28	3
※ LPP150-21.5-18.5/4	18.5	1480	230	21.5	290	23	3
△※ LPP150-50-45/4	45	1480	200	50	260	52	2
※ LPP150-40-37/4	37	1480	200	40	260	44	2
△※ LPP150-33-30/4	30	1480	200	33	300	36	3.5
※ LPP150-25-22/4	22	1480	200	25	260	28	3.5
△※ LPP150-25-30/4	30	1480	300	25	360	31	4.1
△ LPP150-21-18.5/4	18.5	1480	200	21	260	24	3
LPP150-17-15/4	15	1480	200	17	260	20	3
LPP150-12.5-11/4	11	1480	200	12.5	260	16	3
△※ LPP200-34-75/4	75	1480	600	34	659	41	5.5
※ LPP200-28-55/4	55	1480	560	28	656	32	5.5
※ LPP200-22.5-45/4	45	1480	521	22.5	662	27	5.25
※ LPP200-55-75/4	75	1480	300	55	420	61	5.5
※ LPP200-44-55/4	55	1480	280	44	360	50	5.5
※ LPP200-38-45/4	45	1480	262	38	340	45	5.5
※ LPP200-32-37/4	37	1480	245	32	320	38	5.5
△※ LPP250-50-110/4	110	1480	550	50	715	58	4.7
※ LPP250-44-90/4	90	1480	500	44	650	50	4.7
※ LPP250-37-75/4	75	1480	460	37	645	44	4.7
△※ LPP200-36-75/4	75	1480	500	36	650	40	4.8
△※ LPP200-18-37/4	37	1480	500	18	600	23	5.4
※ LPP200-15-30/4	30	1480	500	15	600	20	5.4
LPP200-18-18.5/4	18.5	1480	300	18	390	20	3.5
△ LPP200-15-15/4	15	1480	300	15	390	18	3.5
△※ LPP250-50-132/4	132	1480	630	50	760	60	5.8
※ LPP250-40-110/4	110	1480	630	40	760	53	5.8

Remarks:

1. Models that remarked with " △ "are basic models, others are cutted impeller models.
2. *: Standard configuration without base plate, available on request. **: Can't equipped with baseplate. Models that didn't remarked with "*" or "**", standard configuration equipped with base plate.
3. ※: Stainless steel impeller is available on request.


Hydraulic Performance Curves

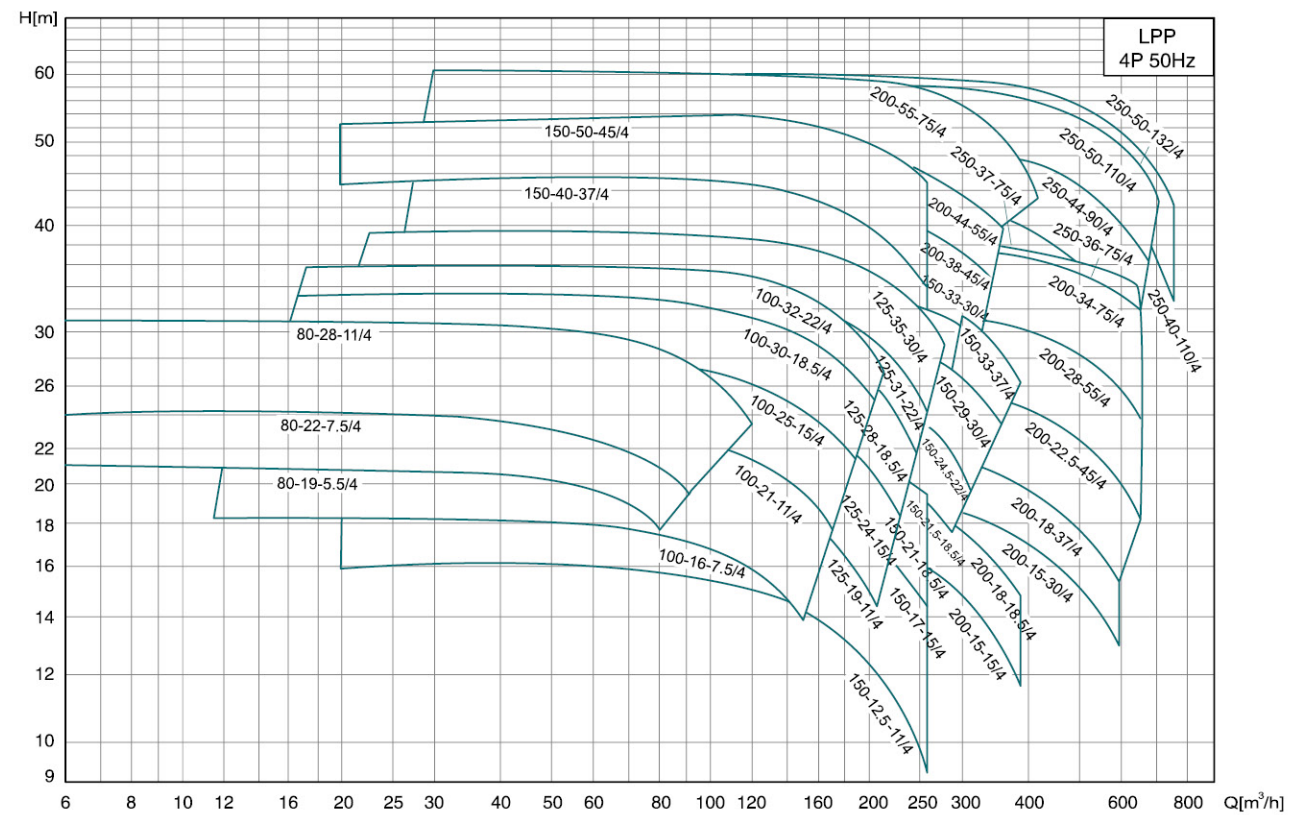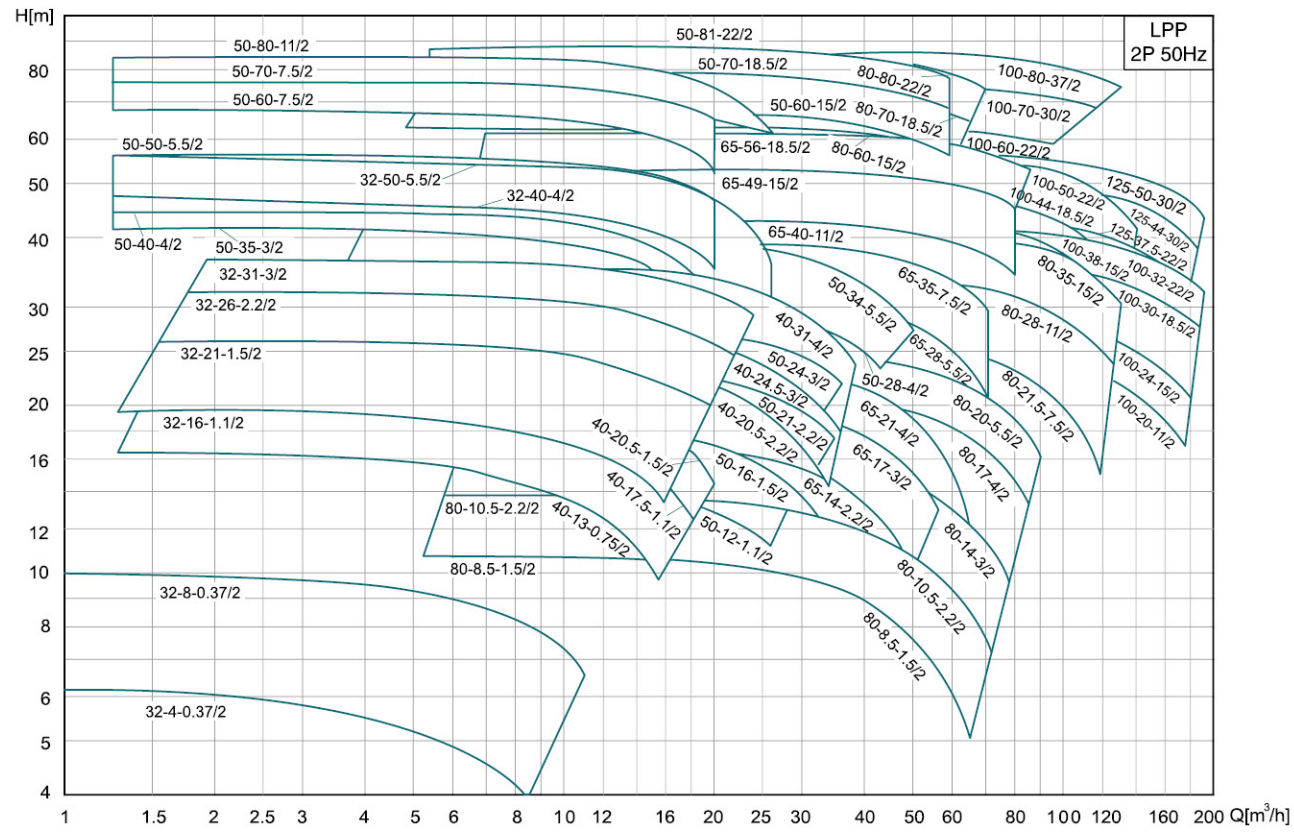


Hydraulic Performance Curves

LPP32

2950r/min

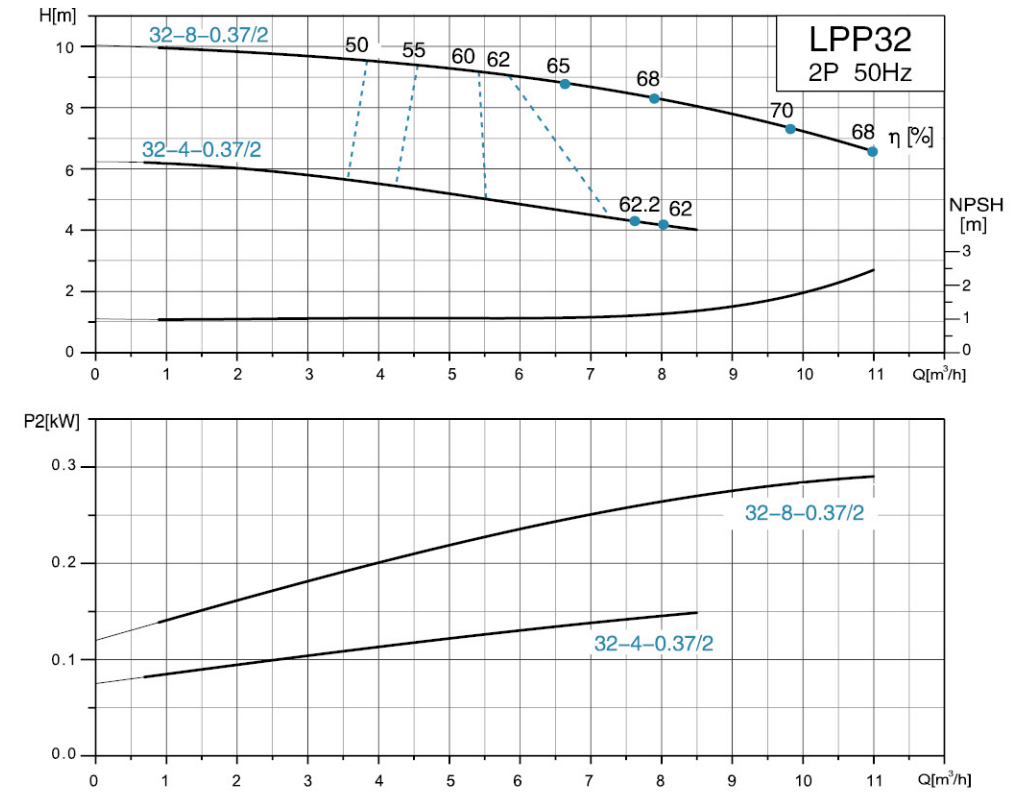



Dimension Drawing

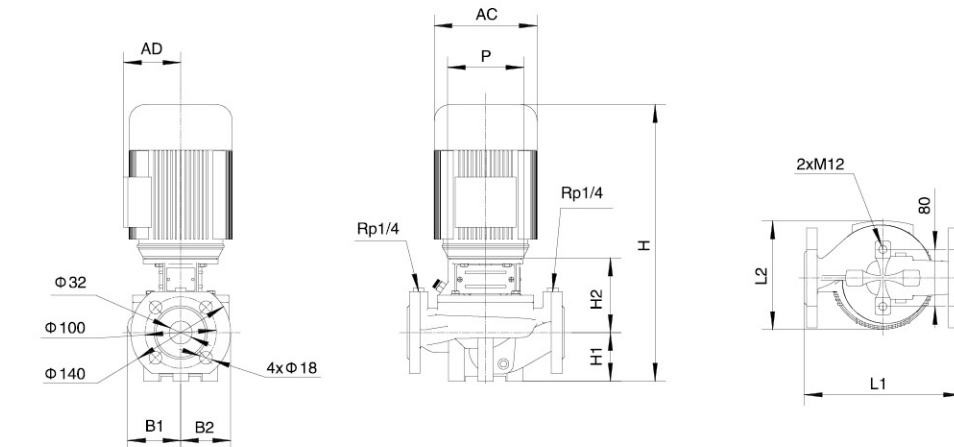


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP32-8-0.37/2	220	175	386	68	104.5	75	70	105	105	130
LPP32-4-0.37/2										

Hydraulic Performance Curves

LPP32	2950r/min
--------------	------------------

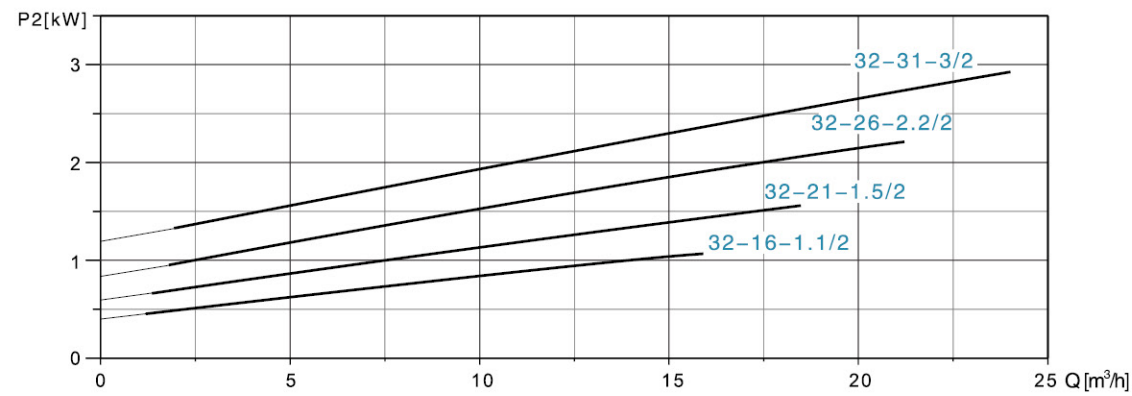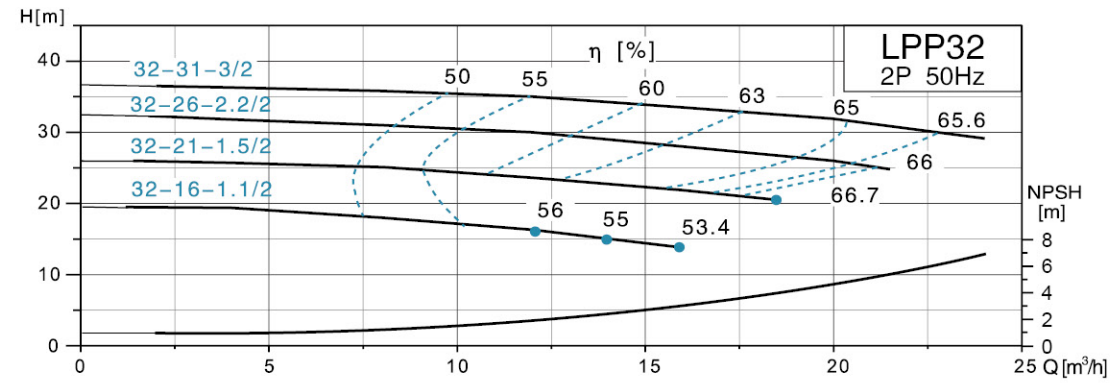



Dimension Drawing

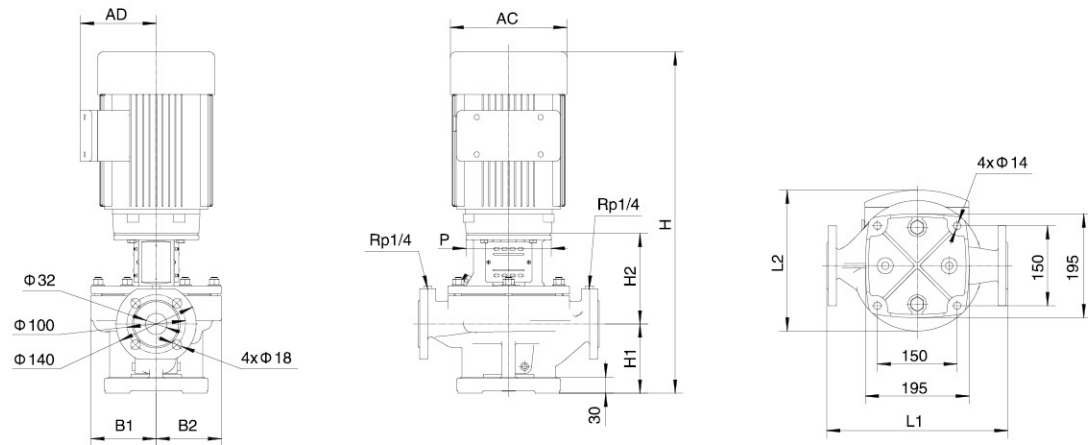


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP32-31-3/2	340	246	641	130	171	123	123	160	119.5	186
LPP32-26-2.2/2	340	250.5	618.5	130	171	123	123	140	127.5	164
LPP32-21-1.5/2	340	250.5	618.5	130	171	123	123	140	127.5	164
LPP32-16-1.1/2	340	247.5	568.5	130	171	123	123	120	124.5	150

Hydraulic Performance Curves

LPP32	2950r/min
--------------	------------------

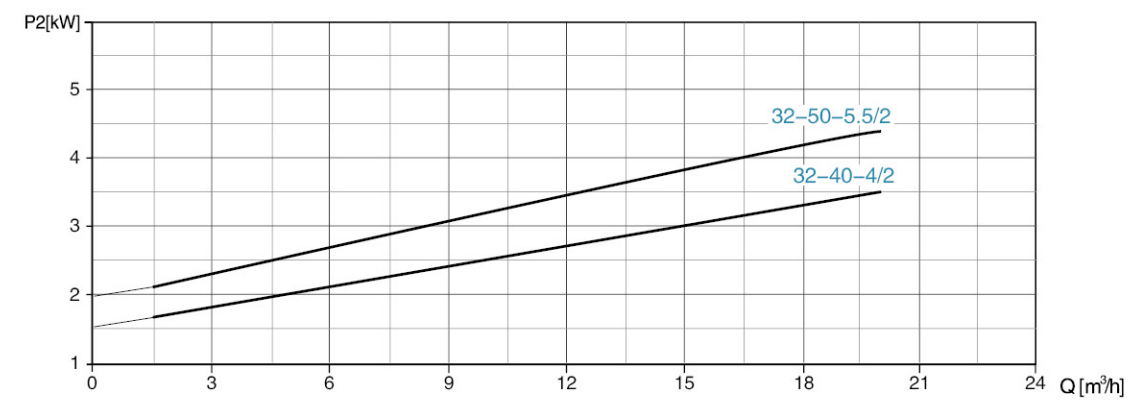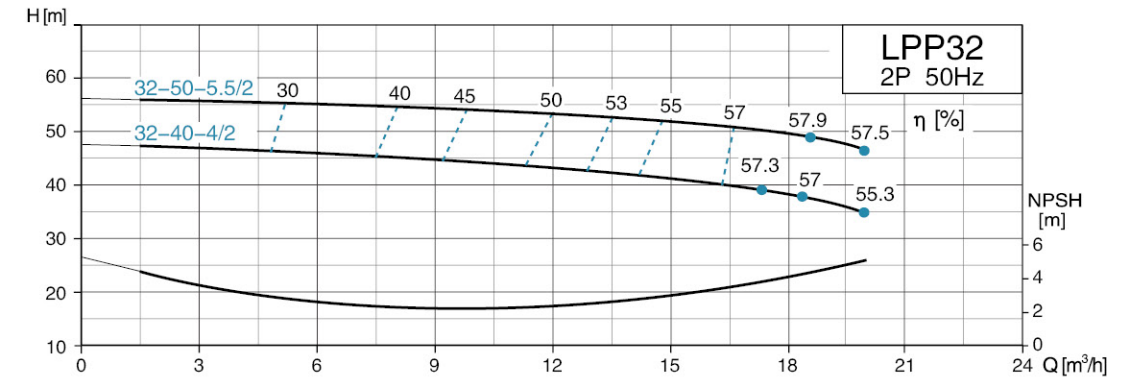


Dimension Drawing

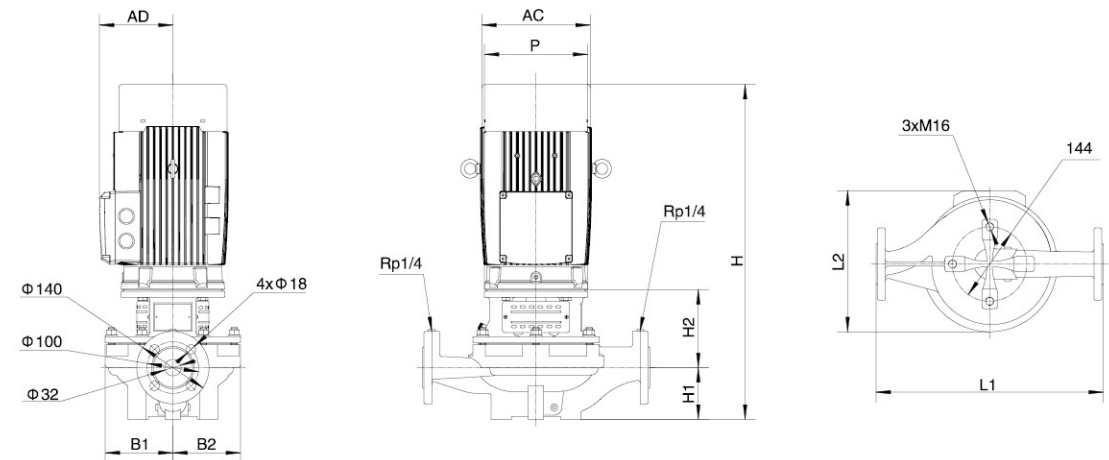


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP32-50-5.5/2	440	273.5	648	100	151	131	131	200	142.5	210
LPP32-40-4/2	440	262	606	100	166	131	131	160	119.5	186

Hydraulic Performance Curves

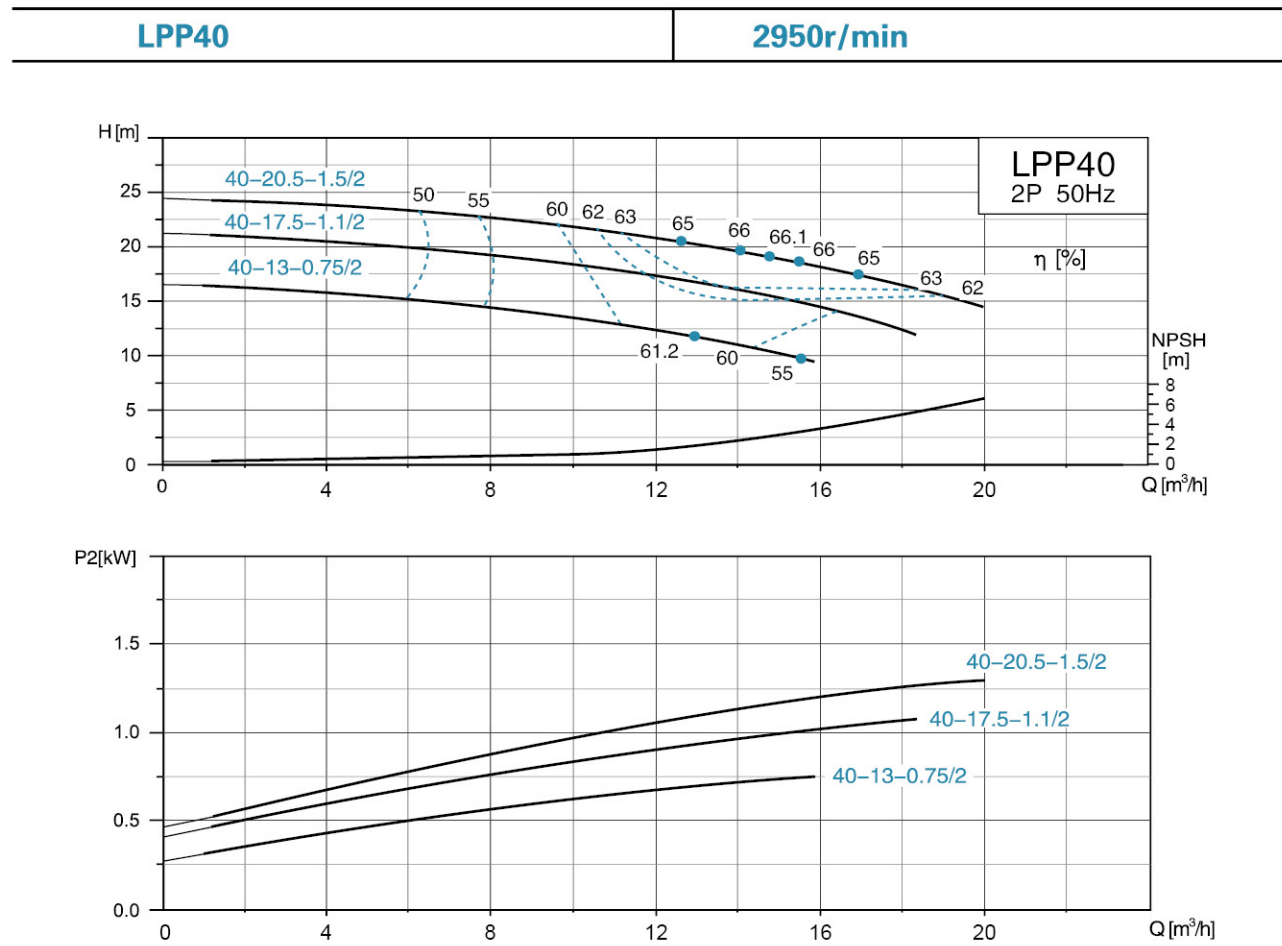


Dimension Drawing

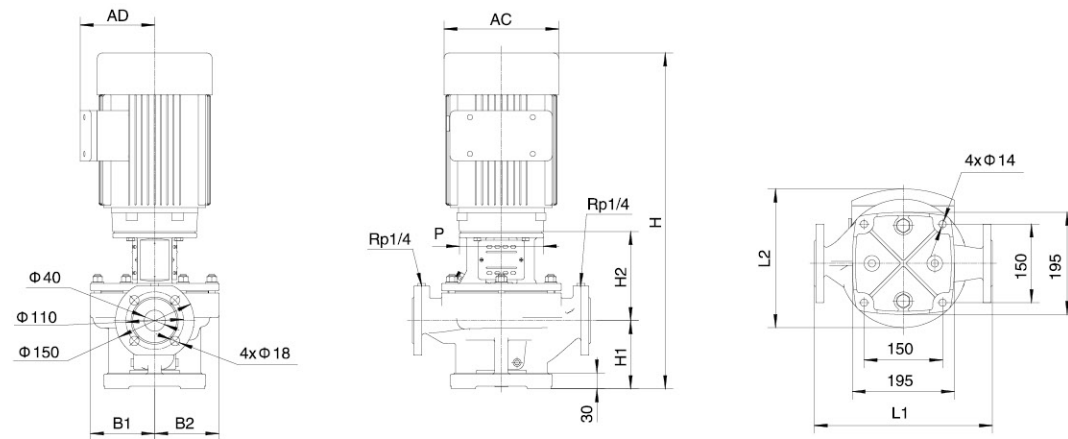


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP40-20.5-1.5/2	340	250.5	610.5	130	161	123	123	140	127.5	164
LPP40-17.5-1.1/2	340	247.5	561.5	130	161	123	123	120	124.5	150
LPP40-13-0.75/2	340	247.5	561.5	130	161	123	123	120	124.5	150

Hydraulic Performance Curves

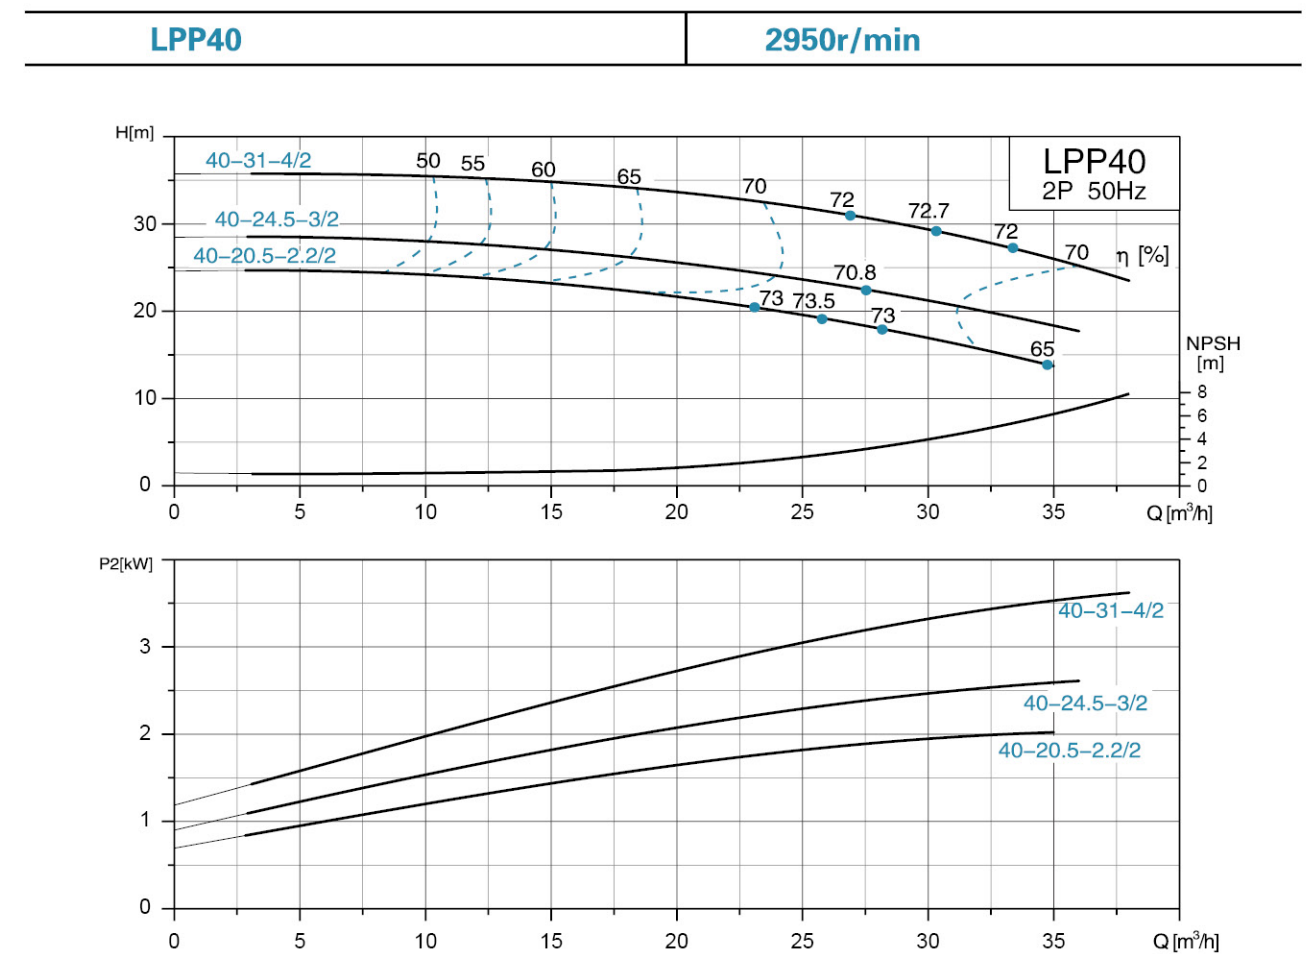


Dimension Drawing

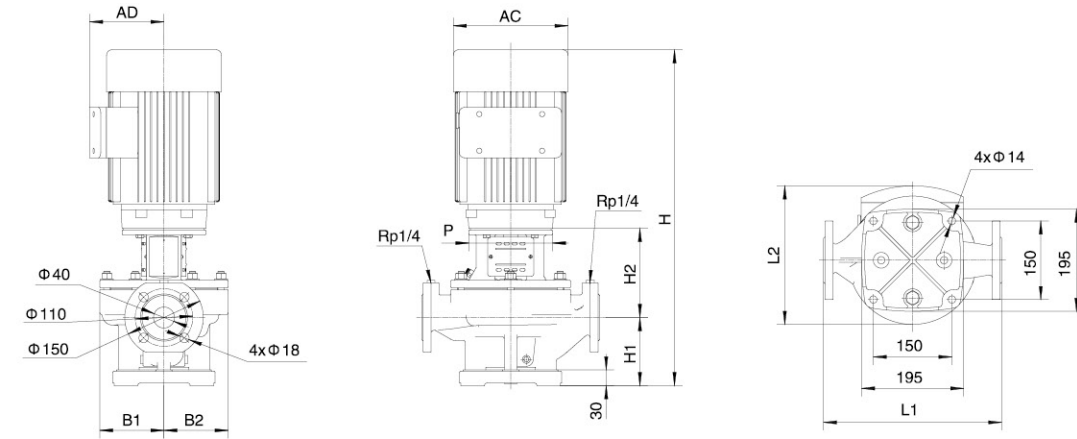


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP40-31-4/2	340	246	642.5	130	170	123	123	160	119.5	186
LPP40-24.5-3/2	340	246	642.5	130	170	123	123	160	119.5	186
LPP40-20.5-2.2/2	340	247.5	619.5	130	170	123	123	140	127.5	164

Hydraulic Performance Curves

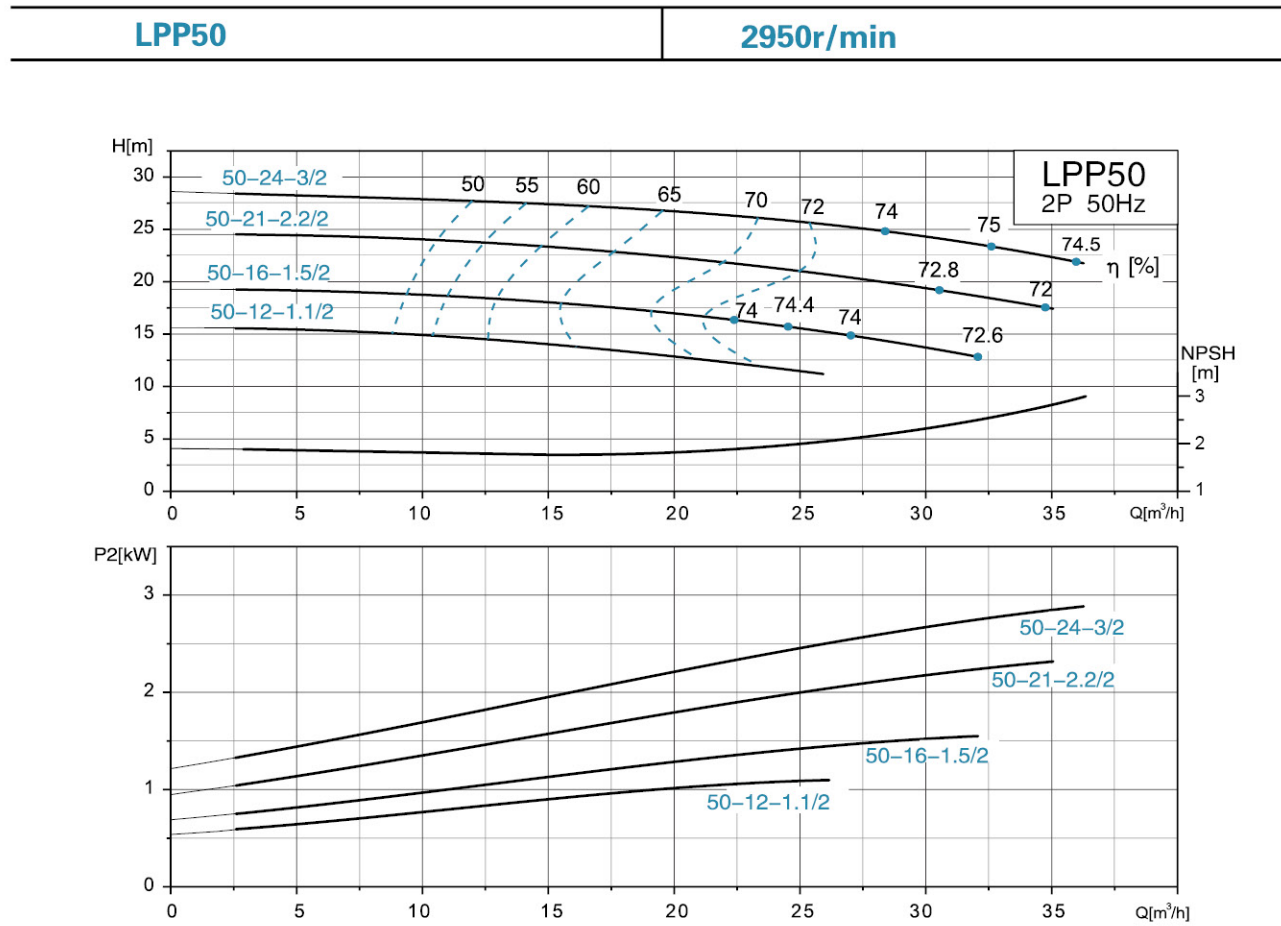


Dimension Drawing

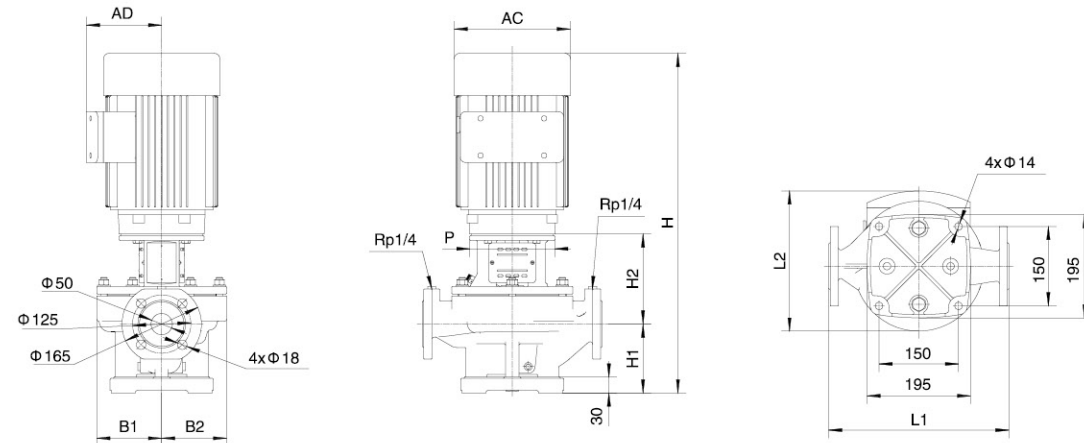


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP50-24-3/2	340	246	665.5	145	178	123	123	160	119.5	186
LPP50-21-2.2/2	340	250.5	642.5	145	178	123	123	140	127.5	164
LPP50-16-1.5/2	340	250.5	642.5	145	178	123	123	140	127.5	164
LPP50-12-1.1/2	340	247.5	593.5	145	178	123	123	120	124.5	150

Hydraulic Performance Curves

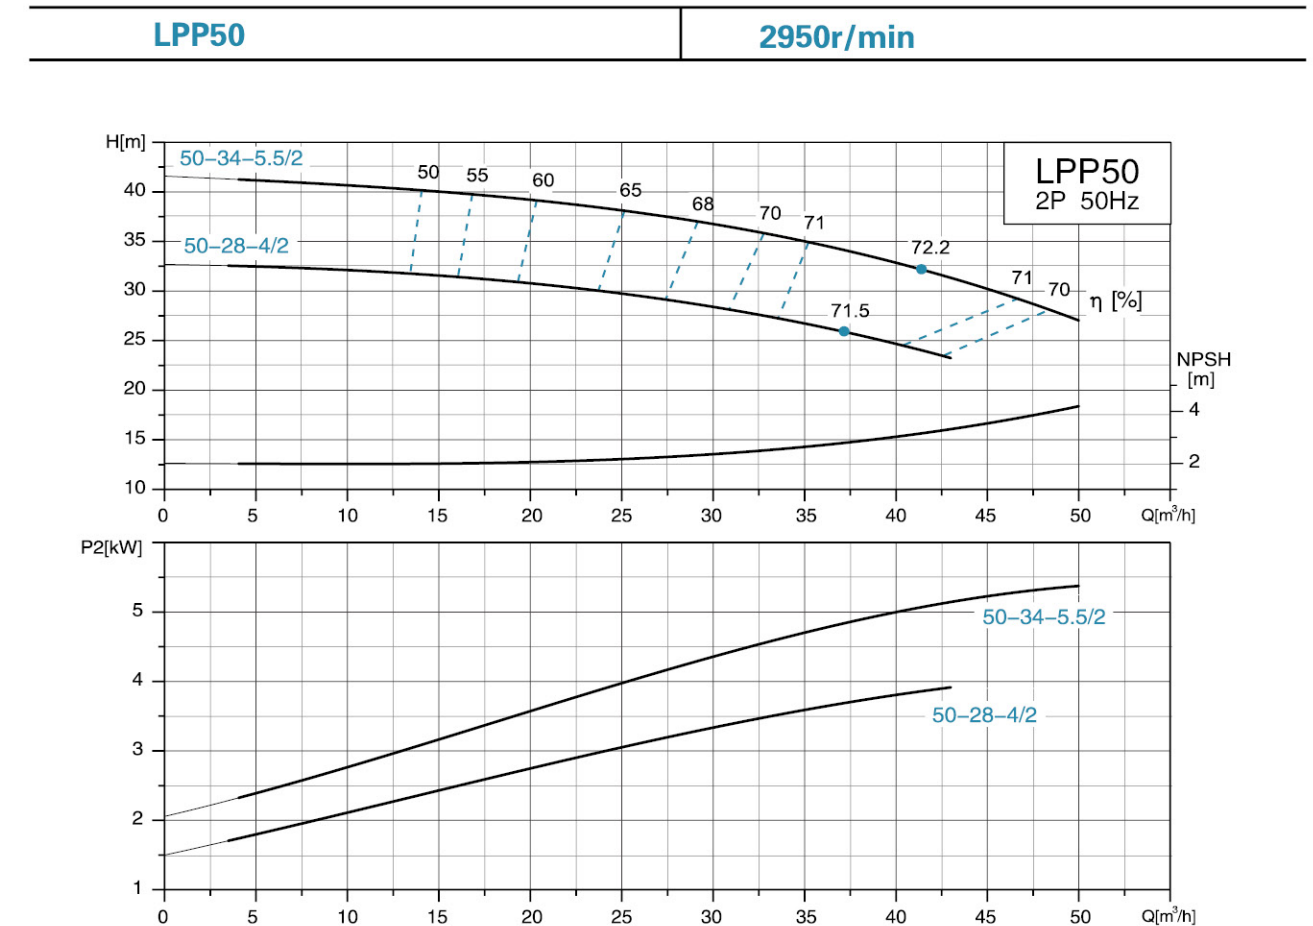



Dimension Drawing

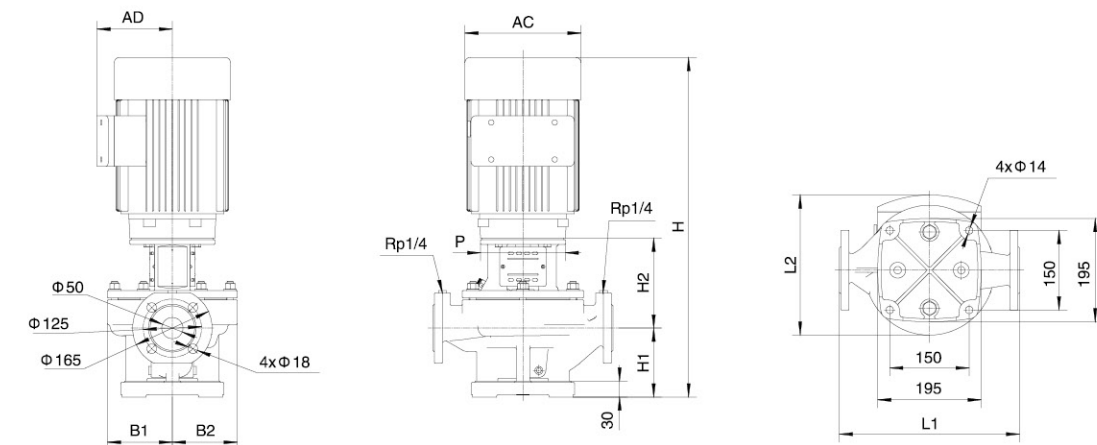


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP50-34-5.5/2	340	265.5	716	145	172	129	123	200	142.5	210
LPP50-28-4/2	340	252	674.5	145	187	129	123	160	119.5	186

Hydraulic Performance Curves

LPP50	2950r/min
--------------	------------------

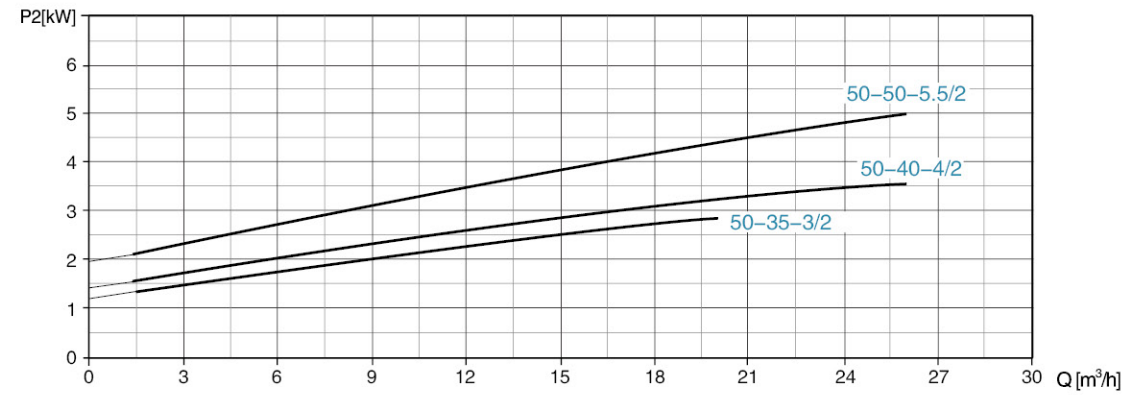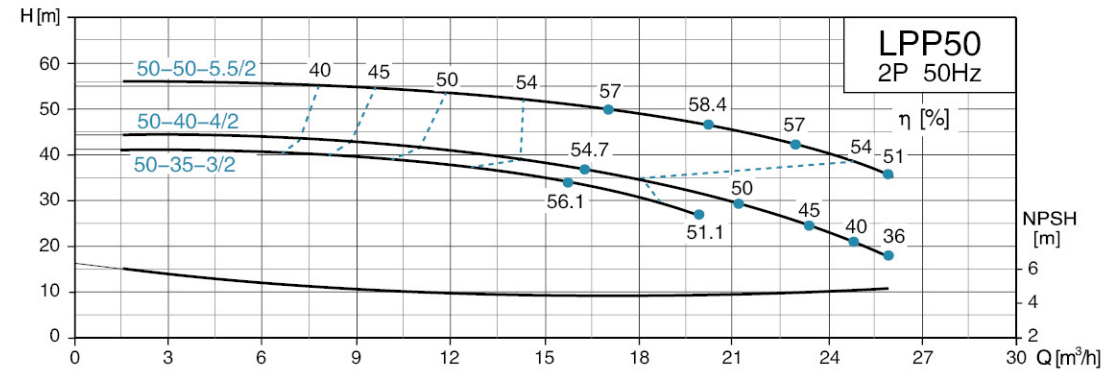



Dimension Drawing

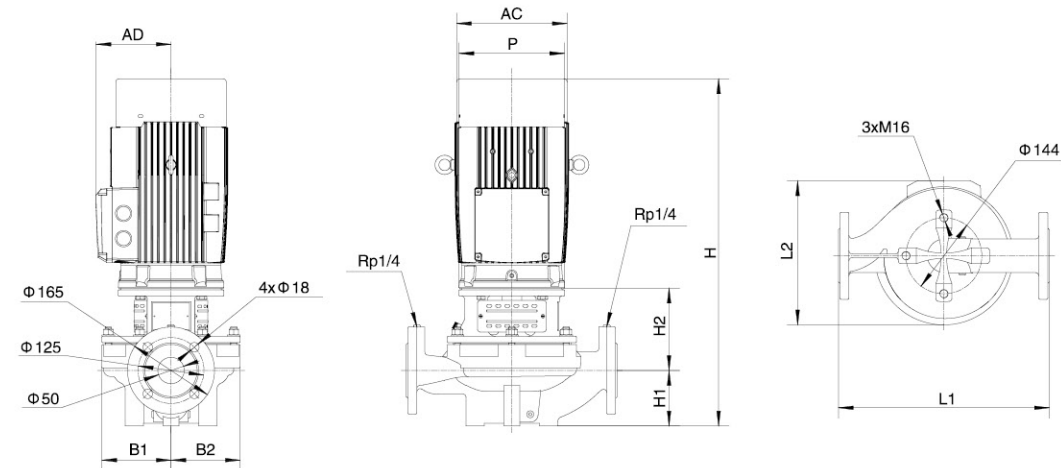


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP50-50-5.5/2	400	273.5	660	105	156	131	131	200	142.5	210
LPP50-40-4/2	400	262	618.5	105	171	131	131	160	119.5	186
LPP50-35-3/2	400	262	618.5	105	171	131	131	160	119.5	186

Hydraulic Performance Curves

LPP50	2950r/min
--------------	------------------

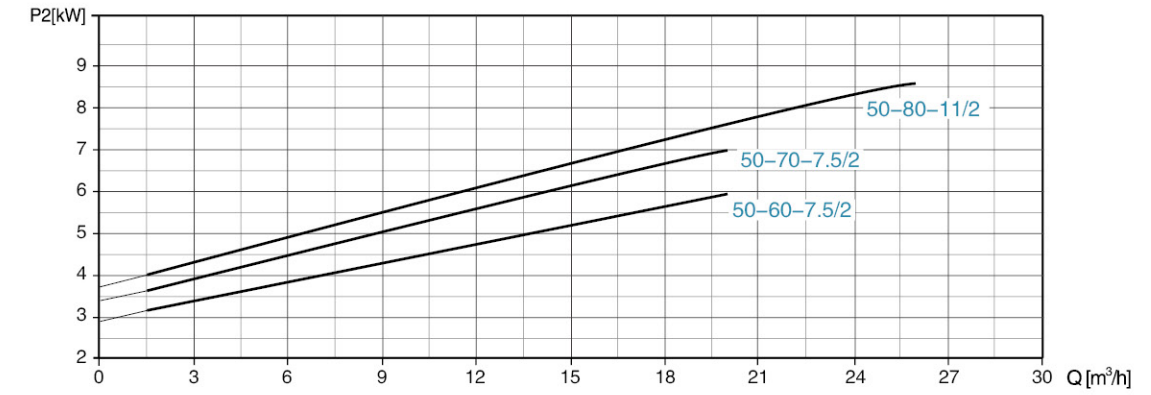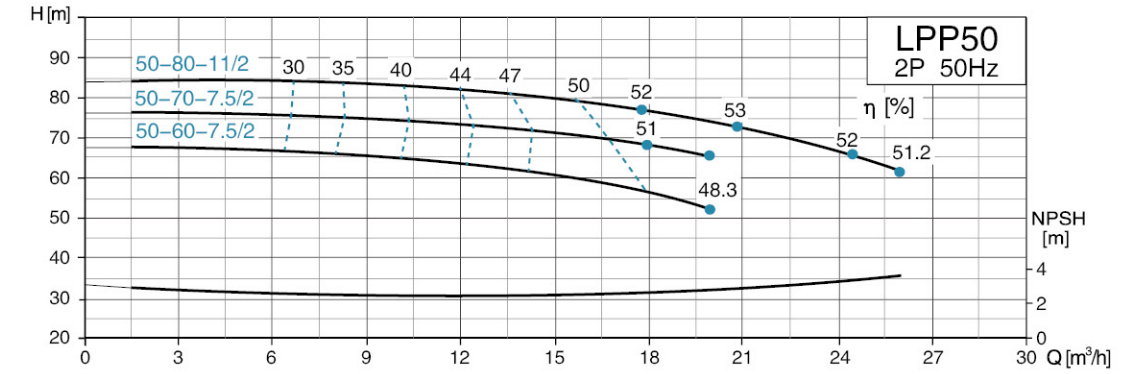


Dimension Drawing

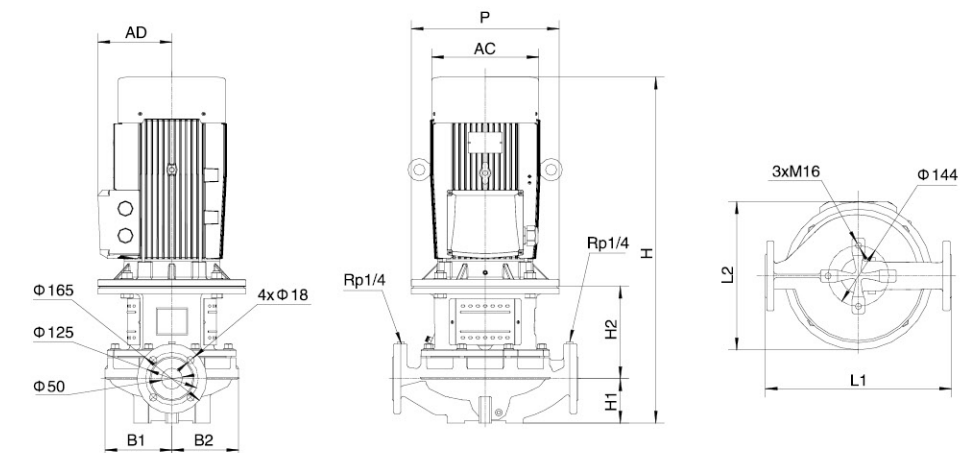


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP50-80-11/2	440	333	818.5	105	218.5	158	158	350	175	254
LPP50-70-7.5/2	440	316	682.5	105	178.5	158	158	300	142.5	210
LPP50-60-7.5/2	440	316	682.5	105	178.5	158	158	300	142.5	210

Hydraulic Performance Curves

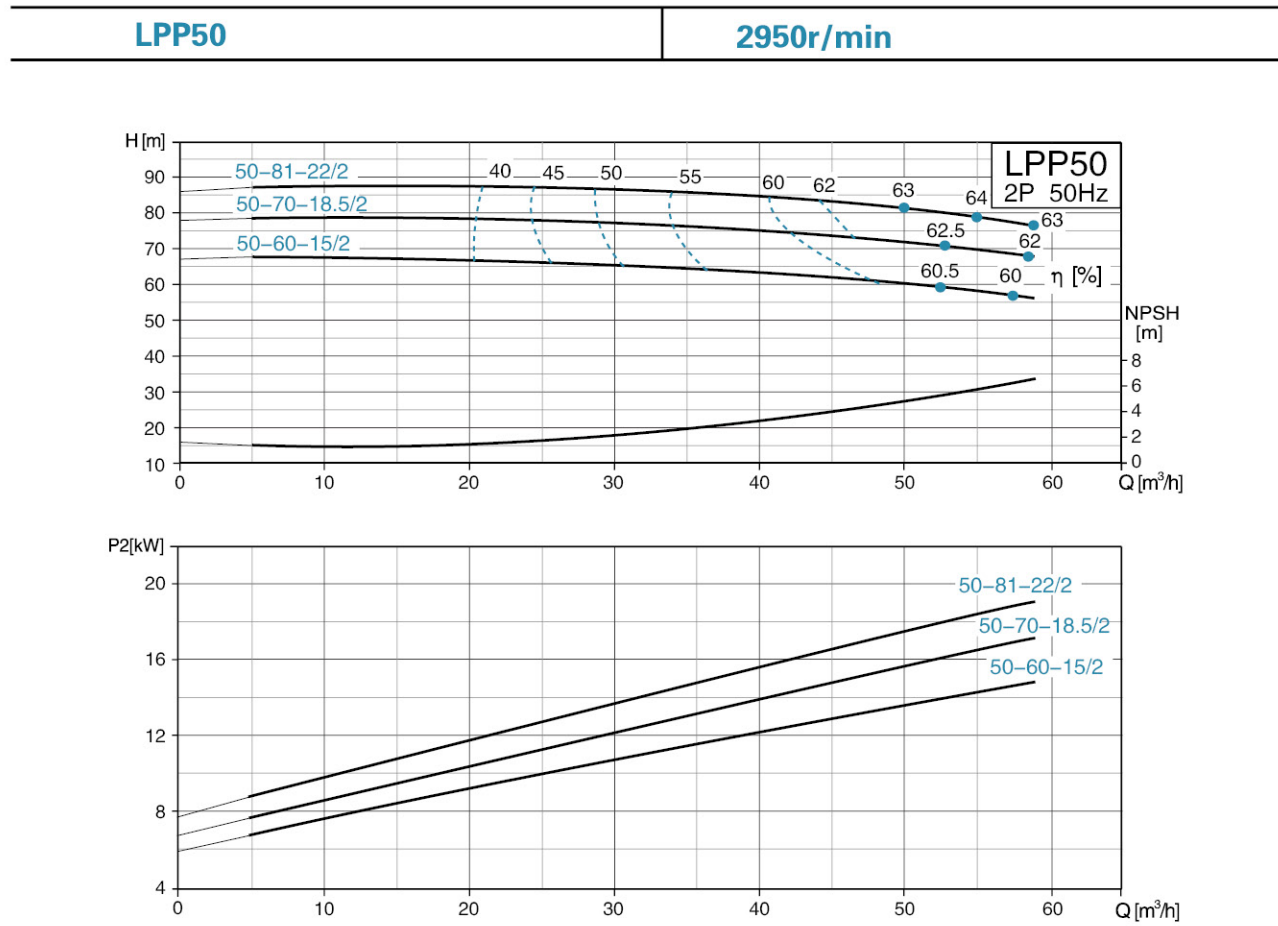


Dimension Drawing

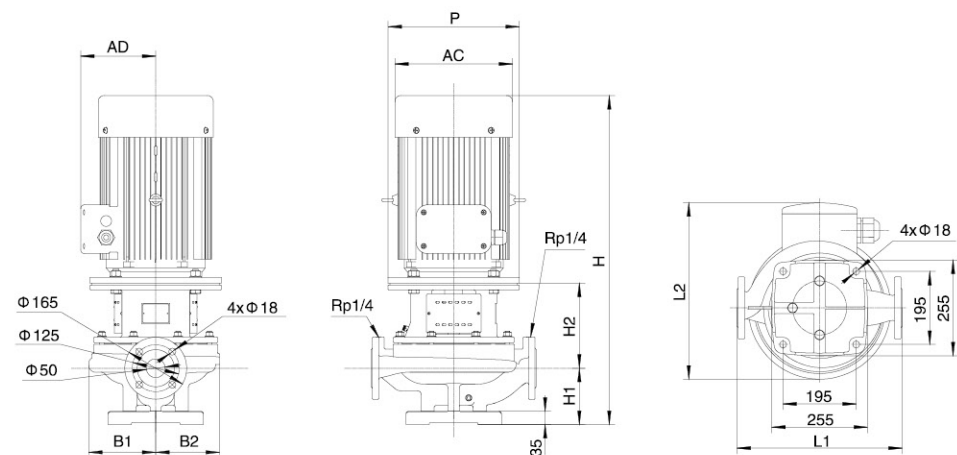


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP50-81-22/2	440	470	1007	150	227	179	170	350	280	380
LPP50-70-18.5/2	440	420	967	150	227	179	170	350	250	330
LPP50-60-15/2	440	354	872	150	227	179	170	350	175	254

Hydraulic Performance Curves

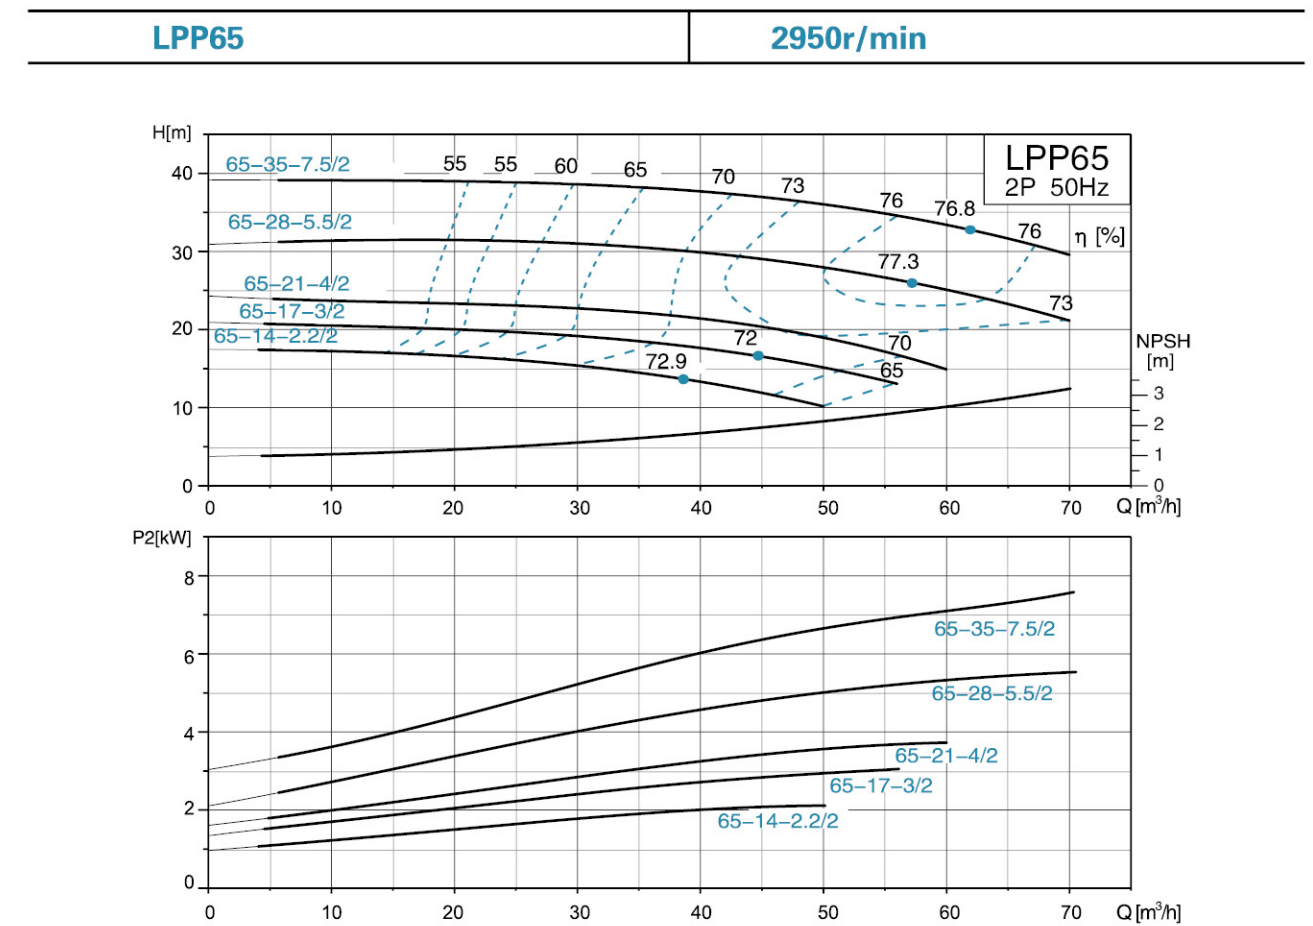


Dimension Drawing

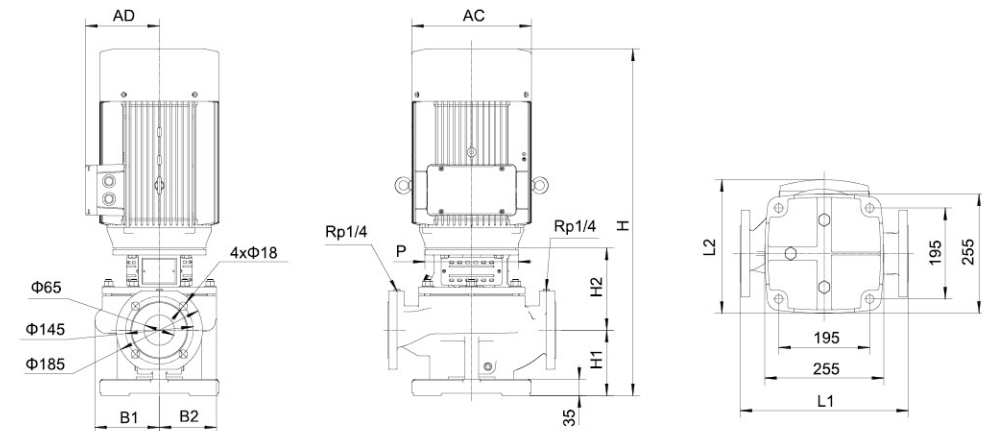


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP65-35-7.5/2	360	265.5	715	140	176	138	123	200	142.5	210
LPP65-28-5.5/2	360	265.5	715	140	176	138	123	200	142.5	210
LPP65-21-4/2	360	261	673.5	140	191	138	123	160	119.5	186
LPP65-17-3/2	360	261	673.5	140	191	138	123	160	119.5	186
LPP65-14-2.2/2	360	261	650.5	140	191	138	123	140	127.5	164

Hydraulic Performance Curves

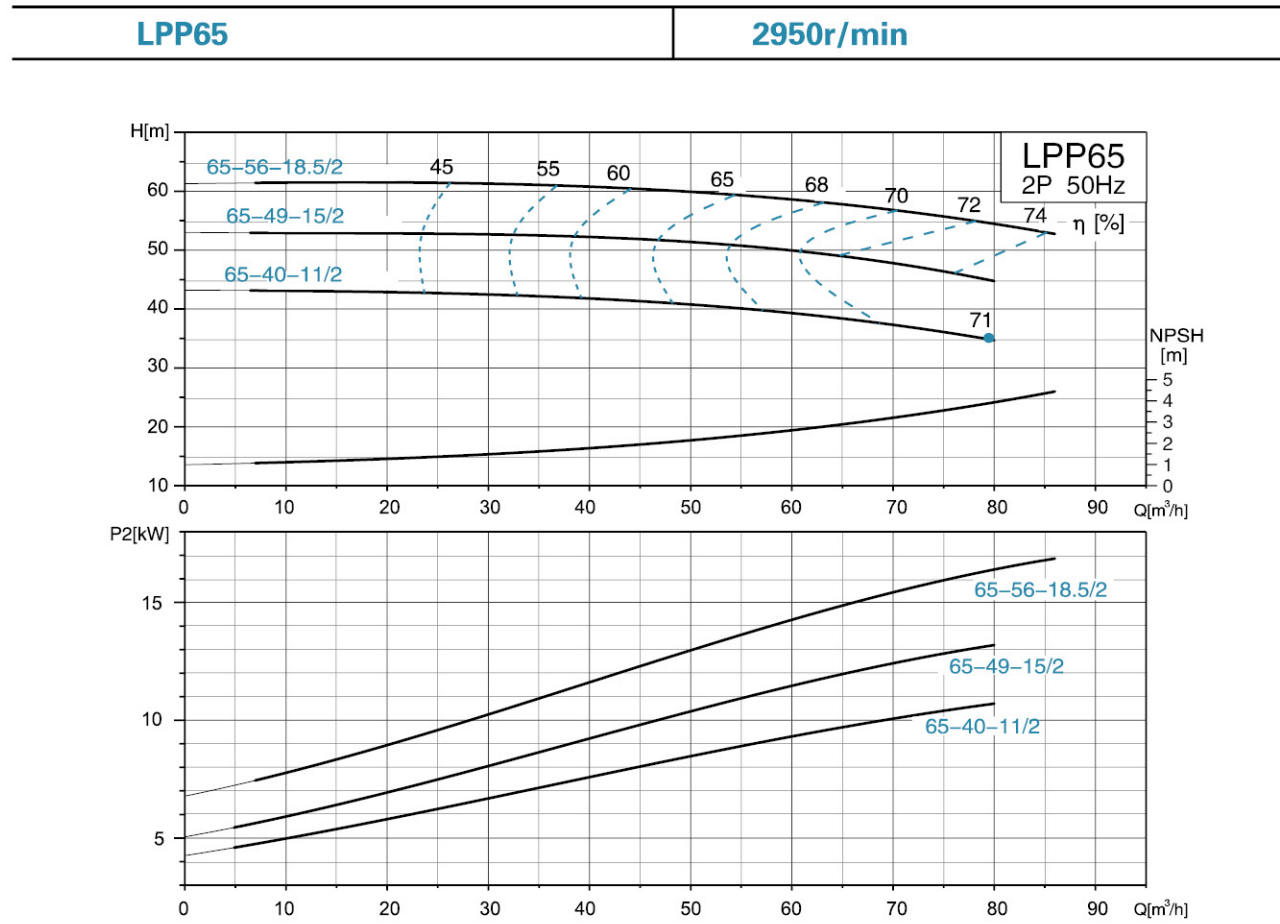


Dimension Drawing

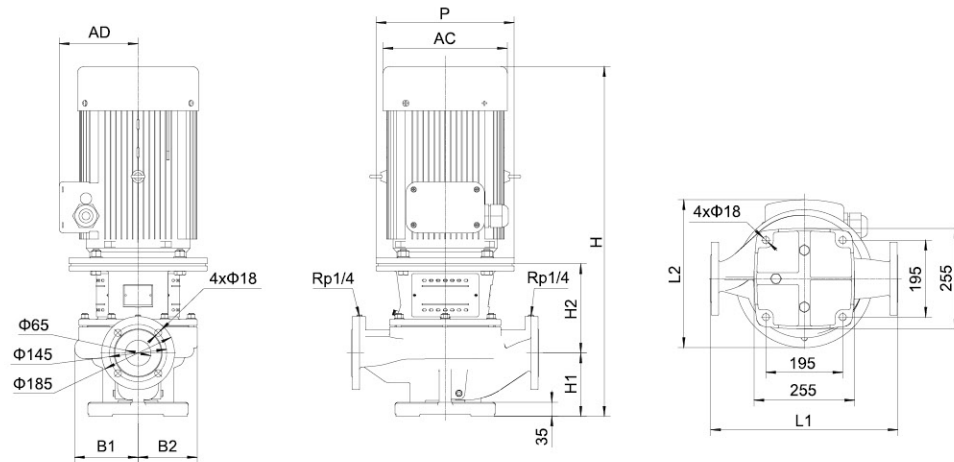


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP65-56-18.5/2	475	415	946	160	226	161	145	350	250	330
LPP65-49-15/2	475	320	881	160	226	161	145	350	175	254
LPP65-40-11/2	475	320	881	160	226	161	145	350	175	254

Hydraulic Performance Curves

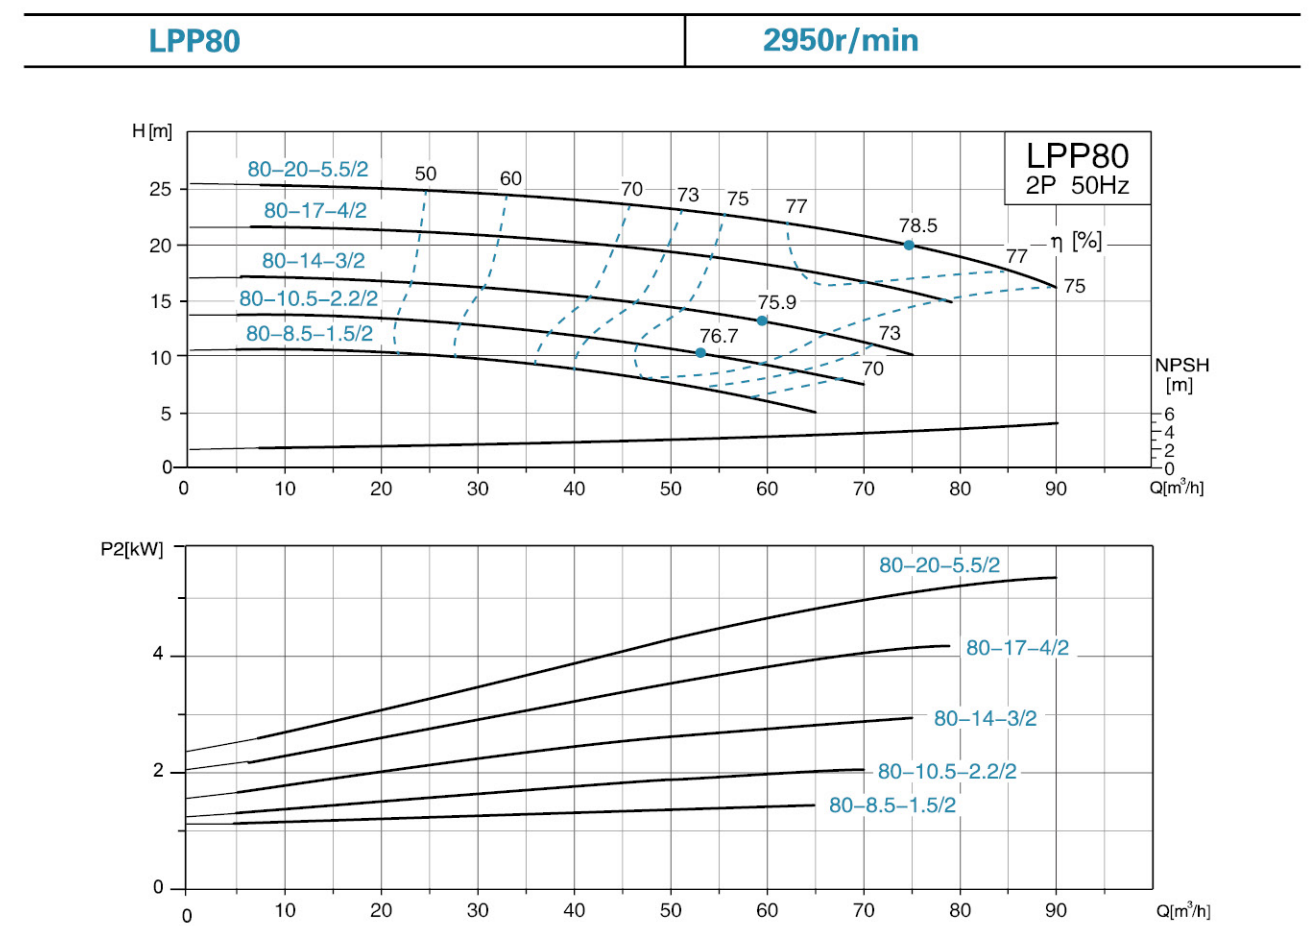


Dimension Drawing

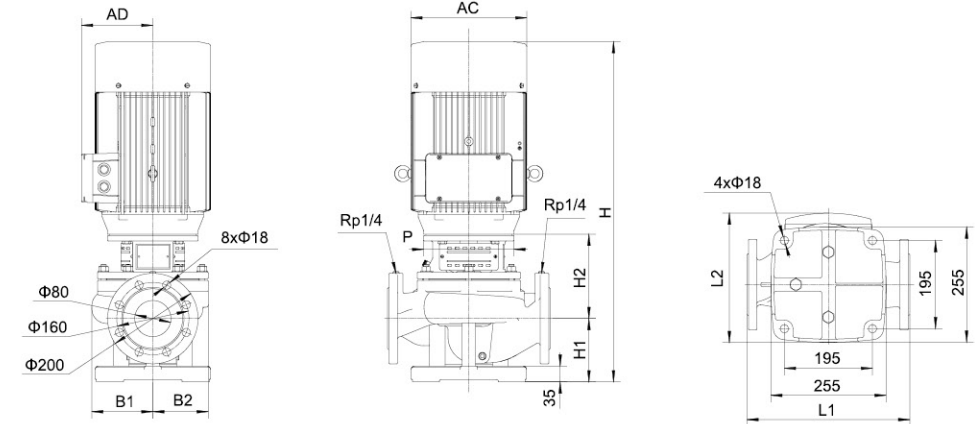


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP80-20-5.5/2	360	266.5	725.5	140	186.5	135	124	200	142.5	210
LPP80-17-4/2	360	259	684.5	140	202	135	124	160	119.5	186
LPP80-14-3/2	360	259	684.5	140	202	135	124	160	119.5	186
LPP80-10.5-2.2/2	360	259	661.5	140	202	135	124	140	127.5	164
LPP80-8.5-1.5/2	360	259	661.5	140	202	135	124	140	127.5	164

Hydraulic Performance Curves

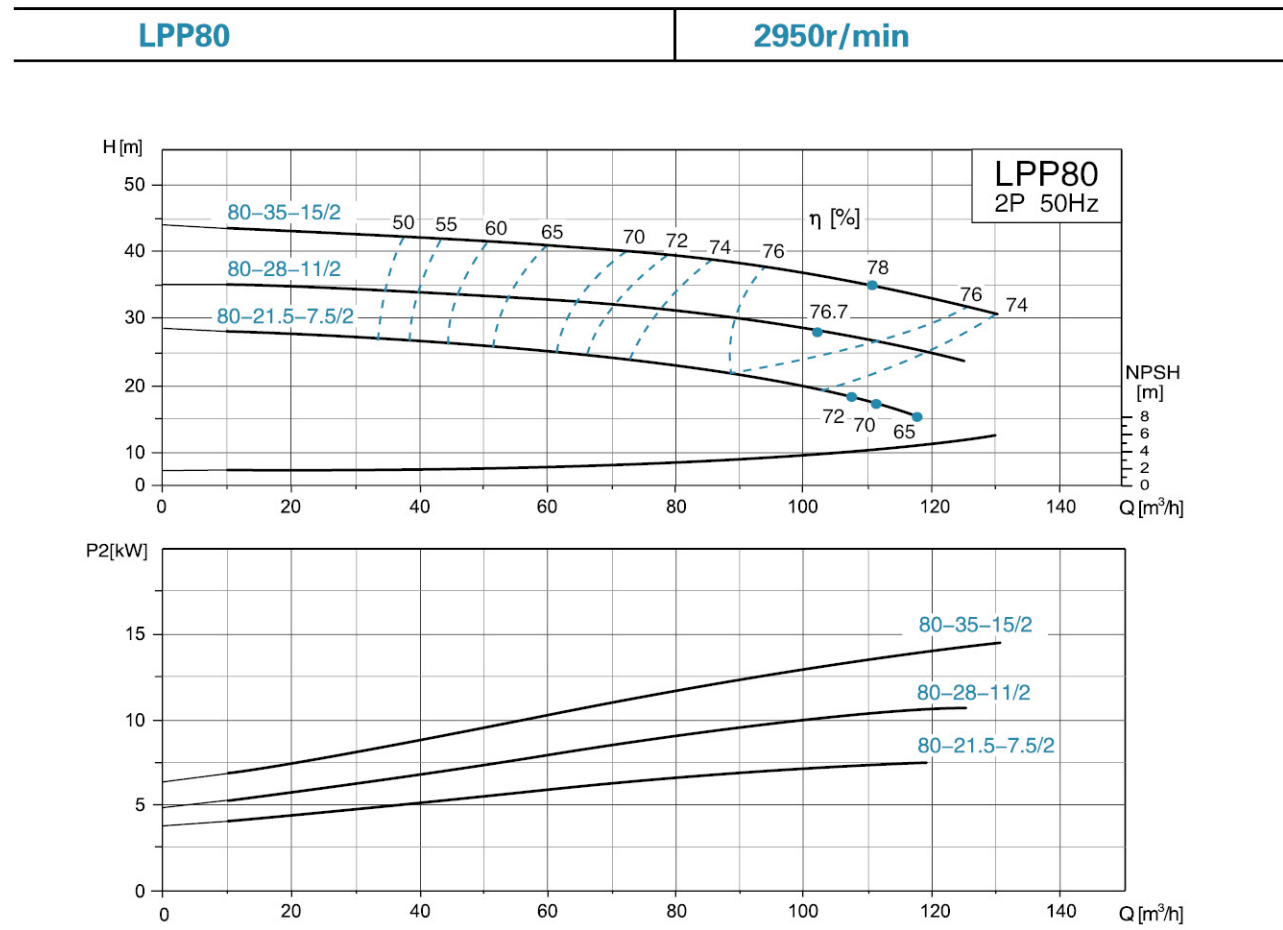


Dimension Drawing

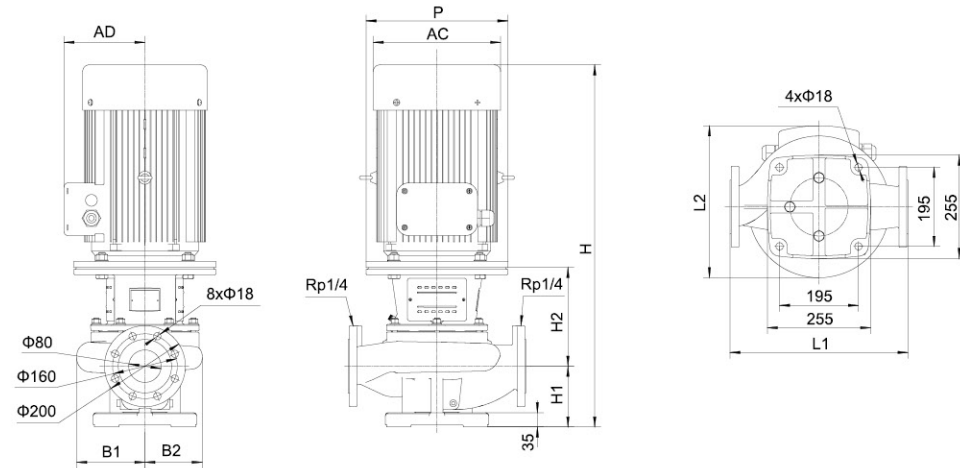


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP80-35-15/2	440	317	889	150	244	169	142	350	175	254
LPP80-28-11/2	440	317	889	150	244	169	142	350	175	254
LPP80-21.5-7.5/2	440	311	763	150	214	169	142	300	142.5	210

Hydraulic Performance Curves

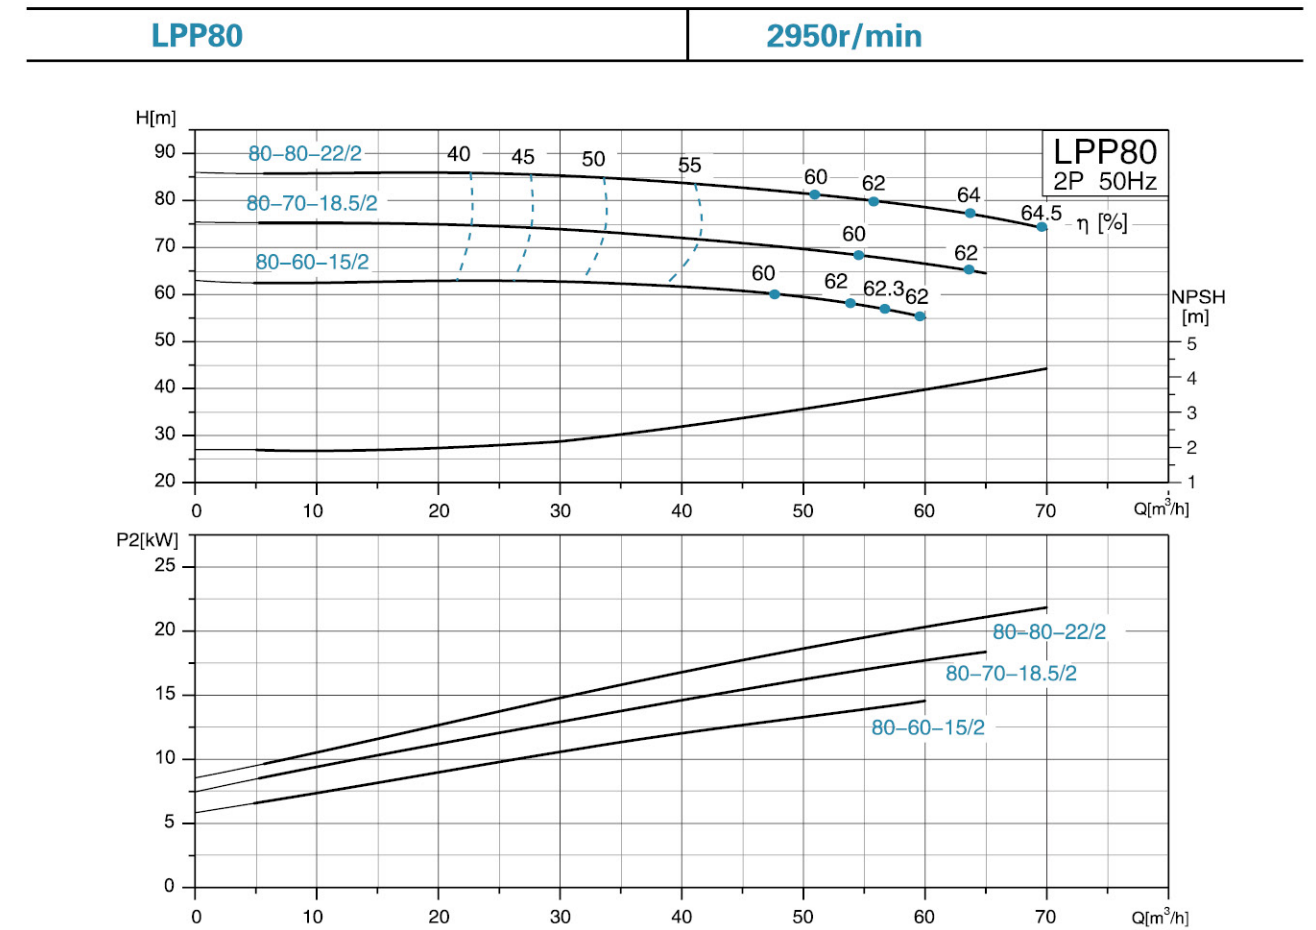


Dimension Drawing

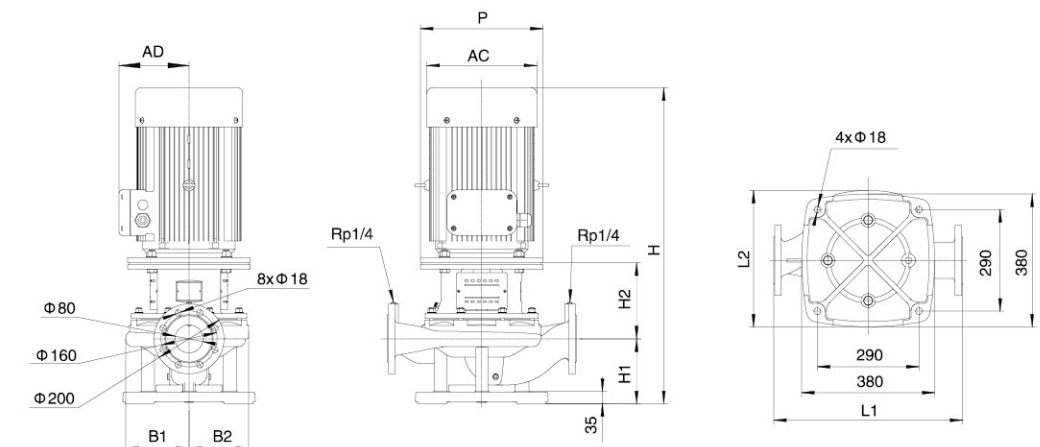


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP80-80-22/2	540	470	1002	185	217	181	170	350	280	380
LPP80-70-18.5/2	540	420	962	185	217	181	170	350	250	330
LPP80-60-15/2	540	351	897	185	217	181	170	350	175	254


Hydraulic Performance Curves

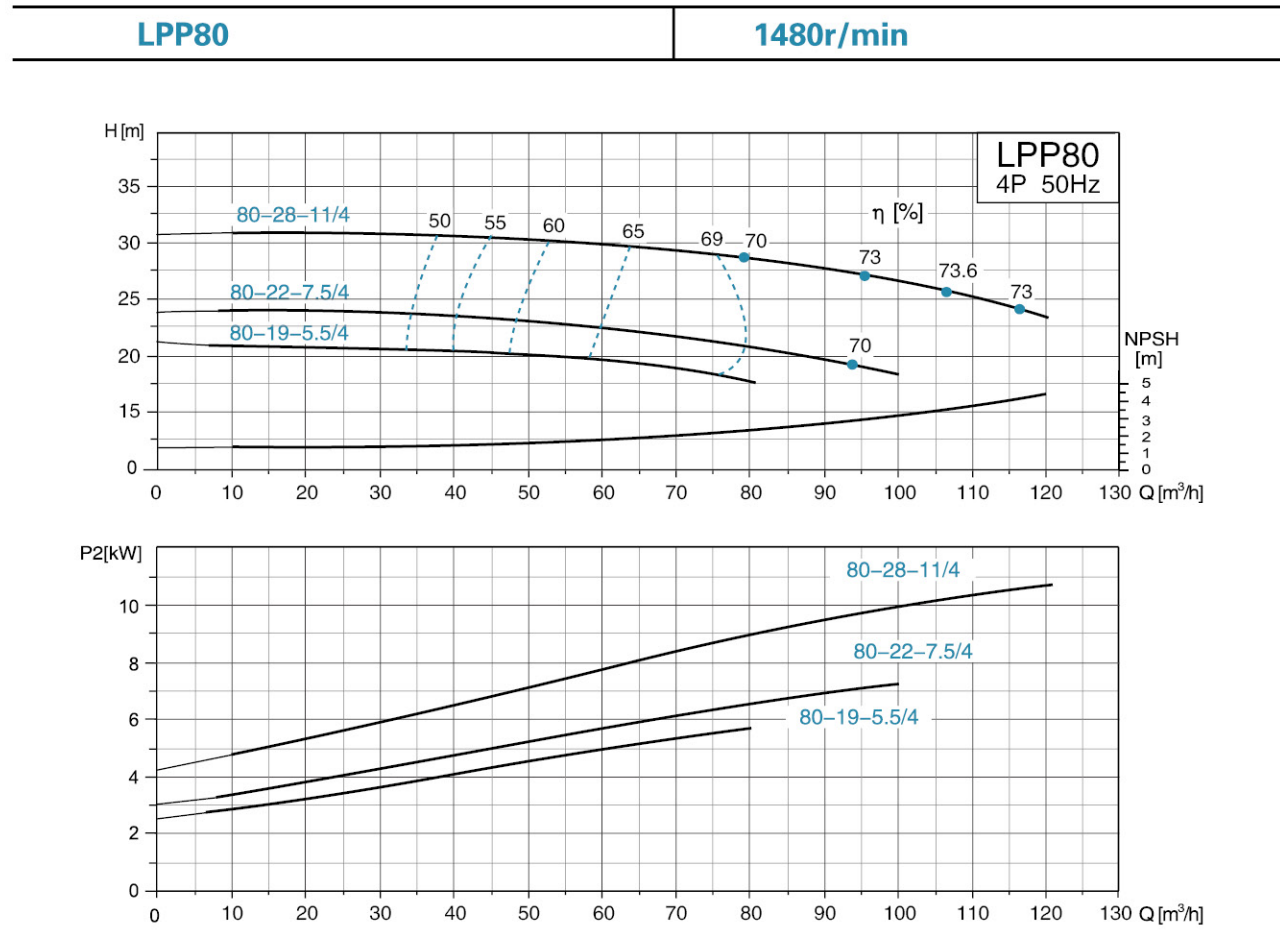

Hydraulic Performance Curves

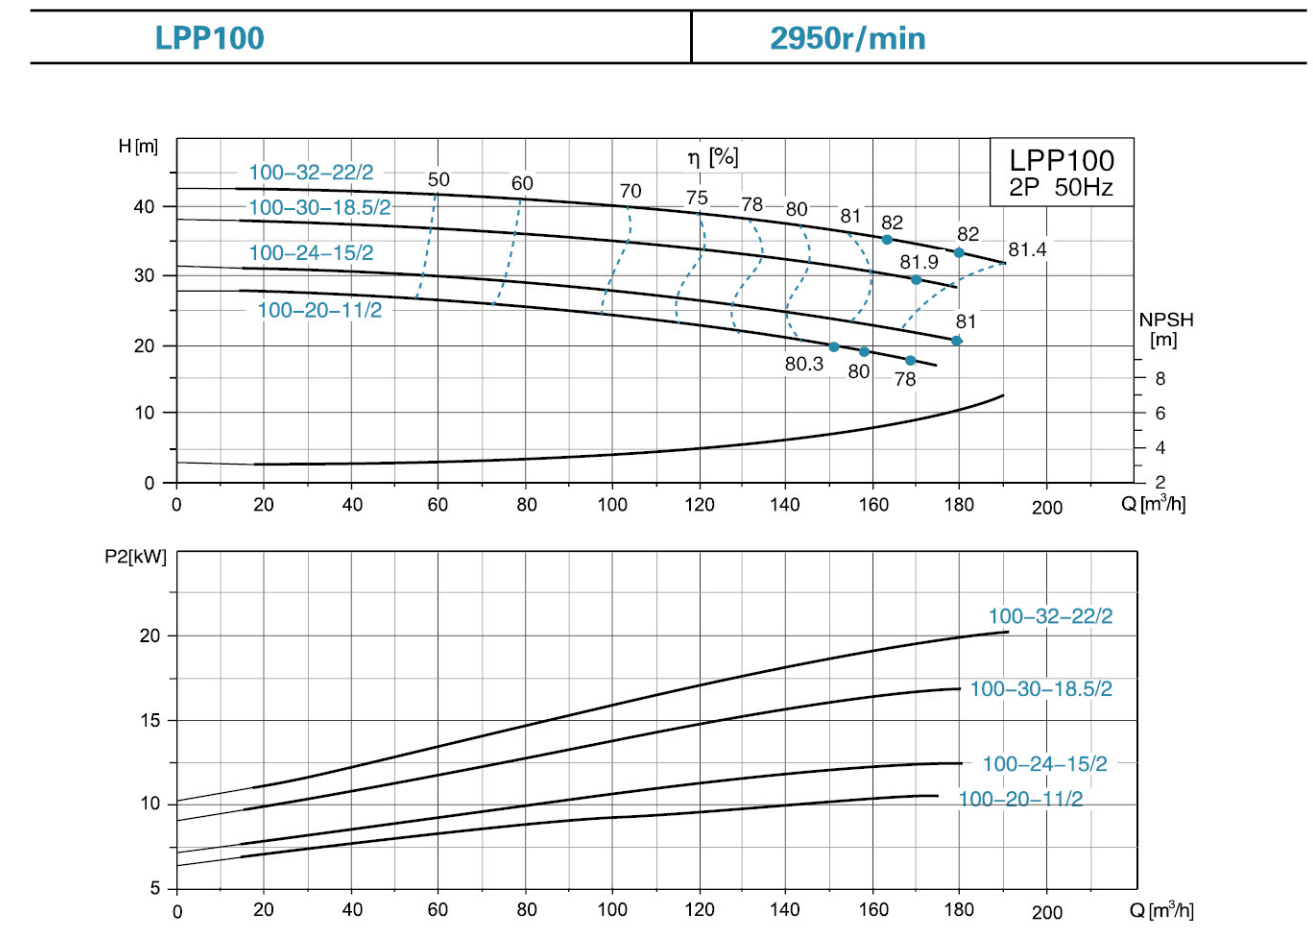


Dimension Drawing

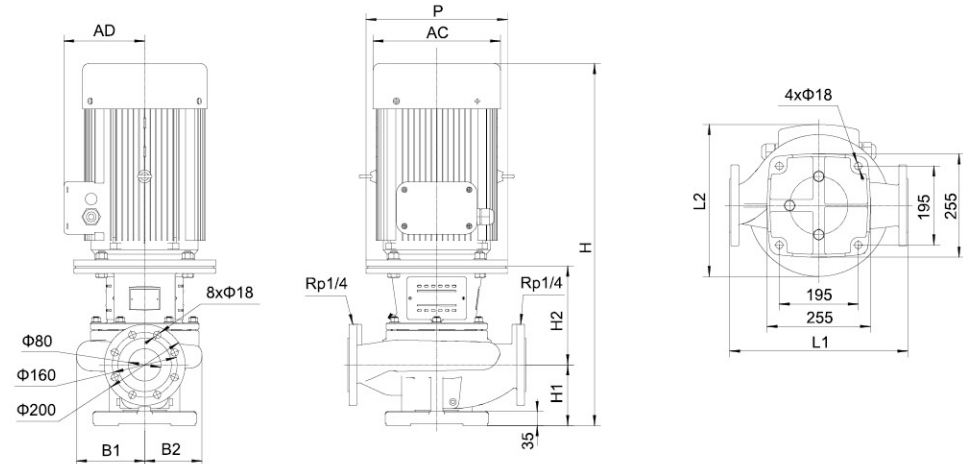


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP80-28-11/4	620	442	947	175	262	224	218	350	250	330
LPP80-22-7.5/4	620	442	902	175	232	224	218	300	175	254
LPP80-19-5.5/4	620	442	806	175	232	224	218	300	142.5	210

Dimension Drawing

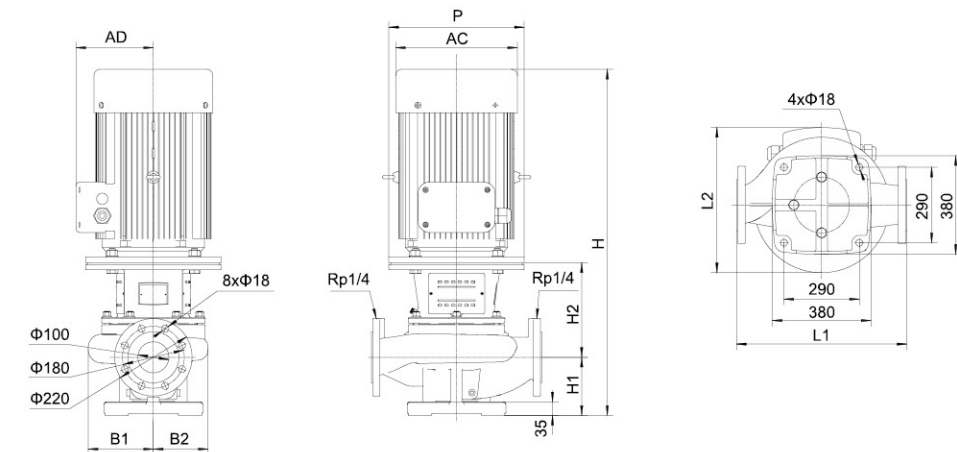


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP100-32-22/2	500	470	1043	175	272	183	144	350	280	380
LPP100-30-18.5/2	500	415	1007	175	272	183	144	350	250	330
LPP100-24-15/2	500	327	942	175	272	183	144	350	175	254
LPP100-20-11/2	500	327	942	175	272	183	144	350	175	254

Hydraulic Performance Curves

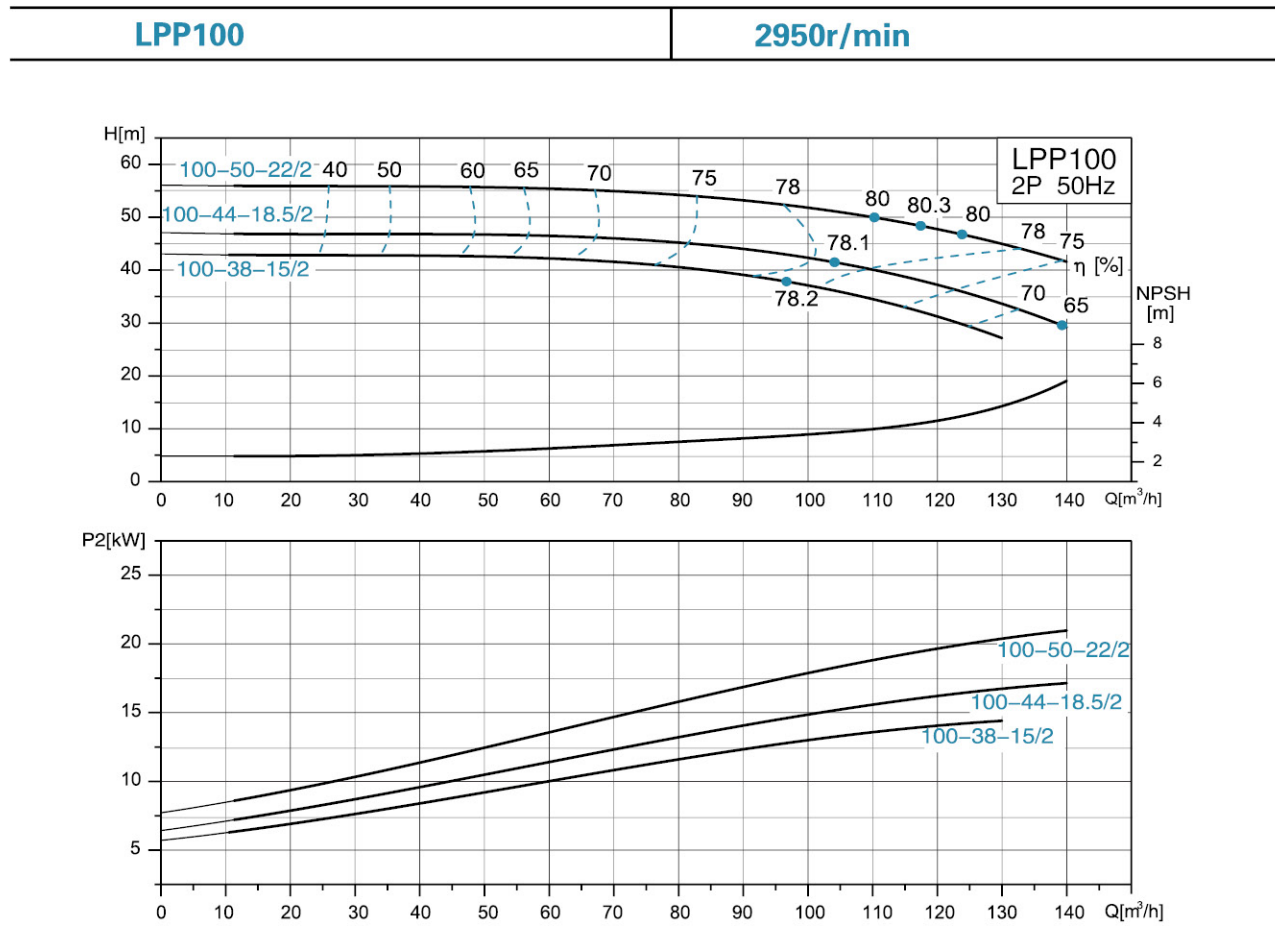


Dimension Drawing

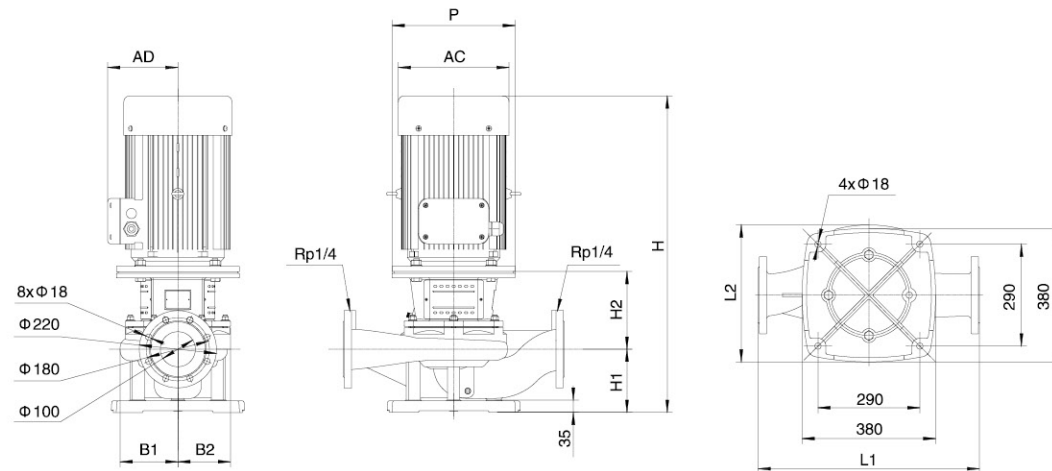


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP100-50-22/2	630	470	1001	180	221	165	150	350	280	380
LPP100-44-18.5/2	630	415	961	180	221	165	150	350	250	330
LPP100-38-15/2	630	325	896	180	221	165	150	350	175	254

Hydraulic Performance Curves

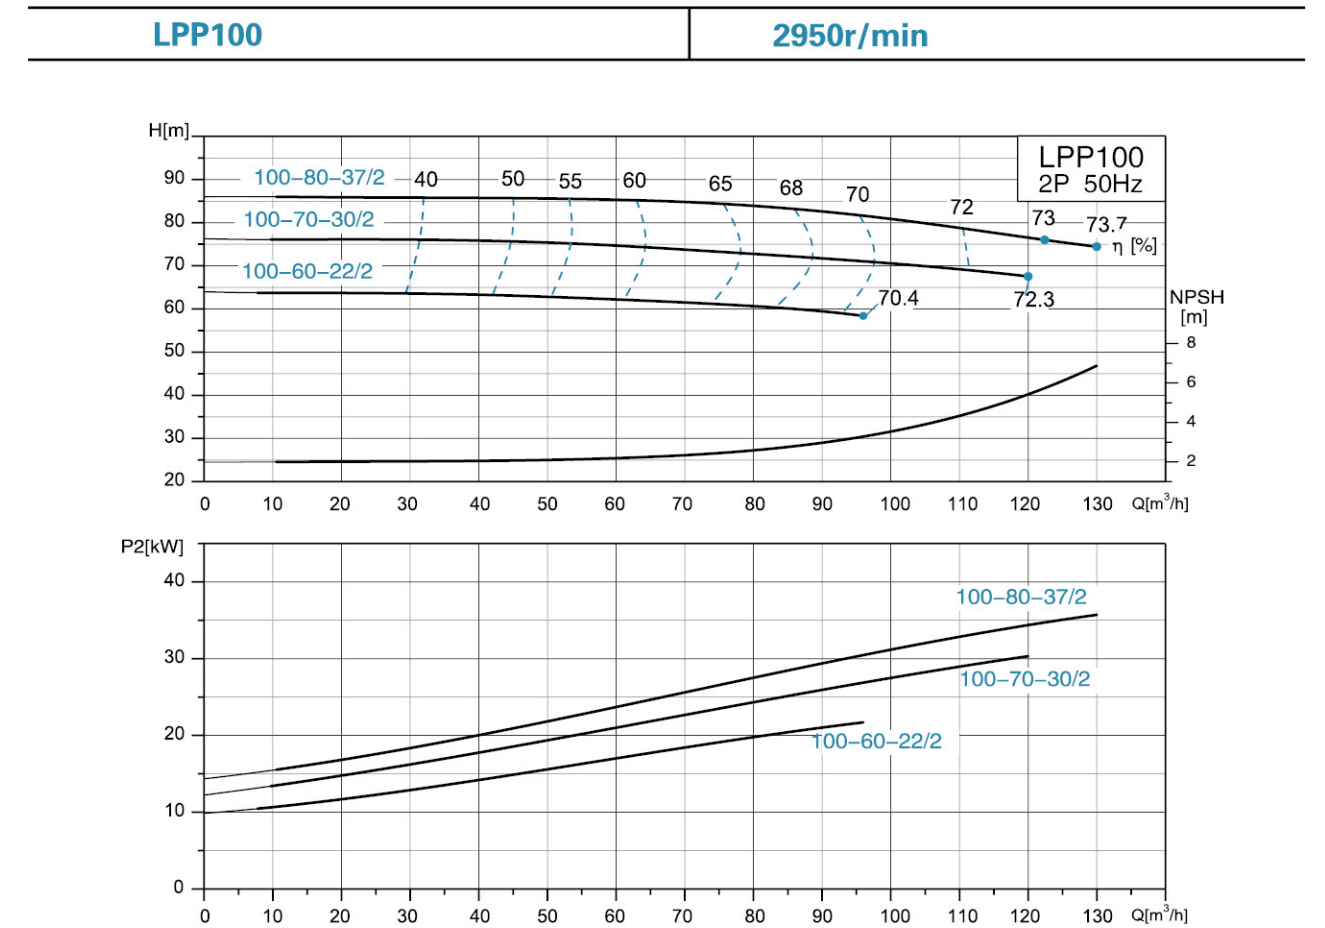


Dimension Drawing

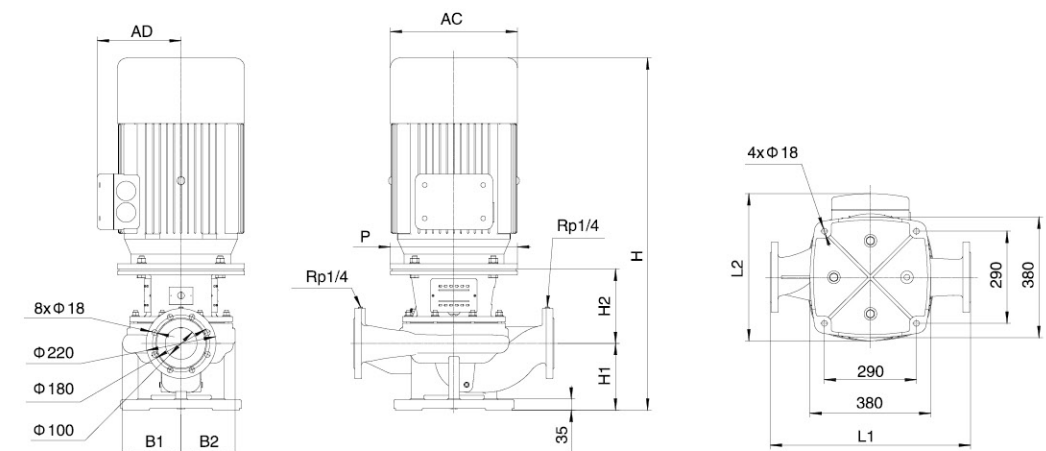


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP100-80-37/2	630	515	1124	210	234	184	170	400	305	420
LPP100-70-30/2	630	515	1124	210	234	184	170	400	305	420
LPP100-60-22/2	630	470	1037	210	227	184	170	350	280	380

Hydraulic Performance Curves

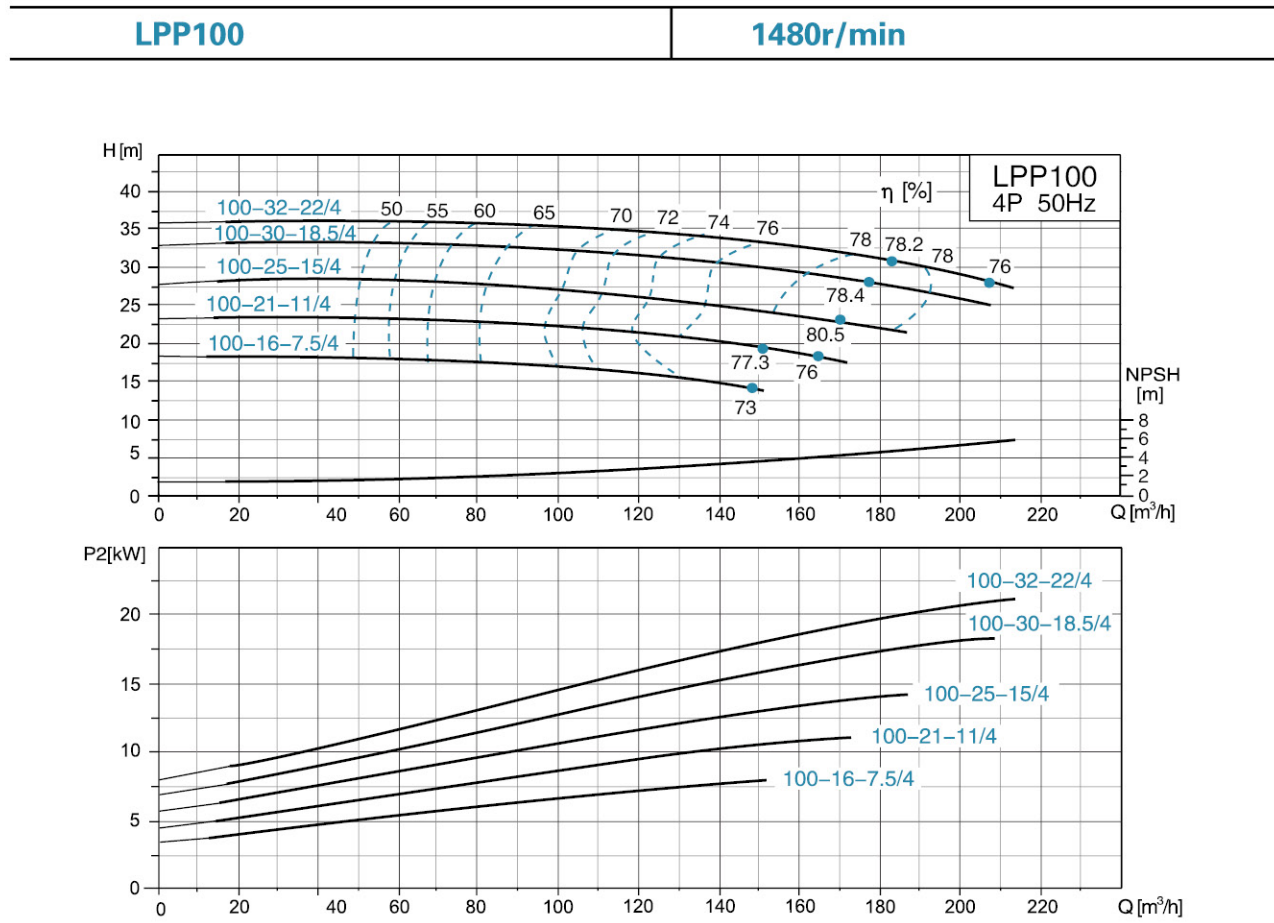


Dimension Drawing

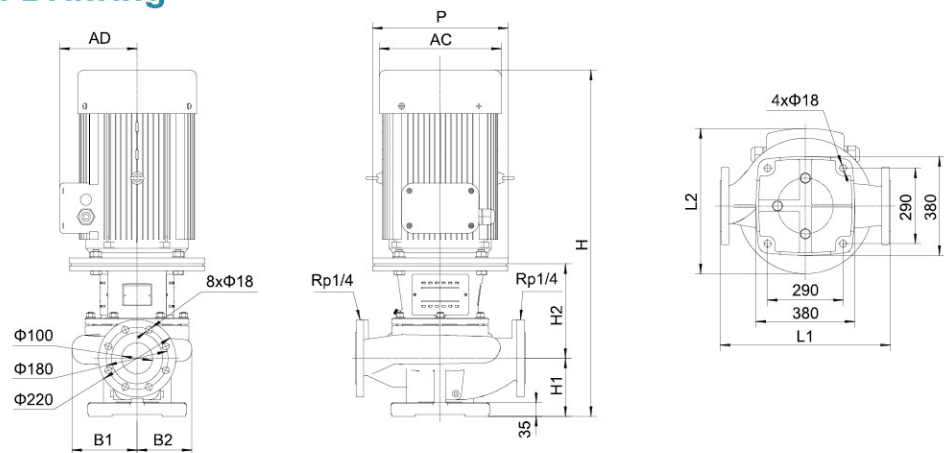


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP100-32-22/4	670	499	1122	210	277	253	219	350	280	380
LPP100-30-18.5/4	670	499	1077	210	277	253	219	350	280	380
LPP100-25-15/4	670	469	1047	210	277	253	219	350	250	330
LPP100-21-11/4	670	472	997	210	277	253	219	350	250	330
LPP100-16-7.5/4	670	472	952	210	247	253	219	300	175	254

Hydraulic Performance Curves

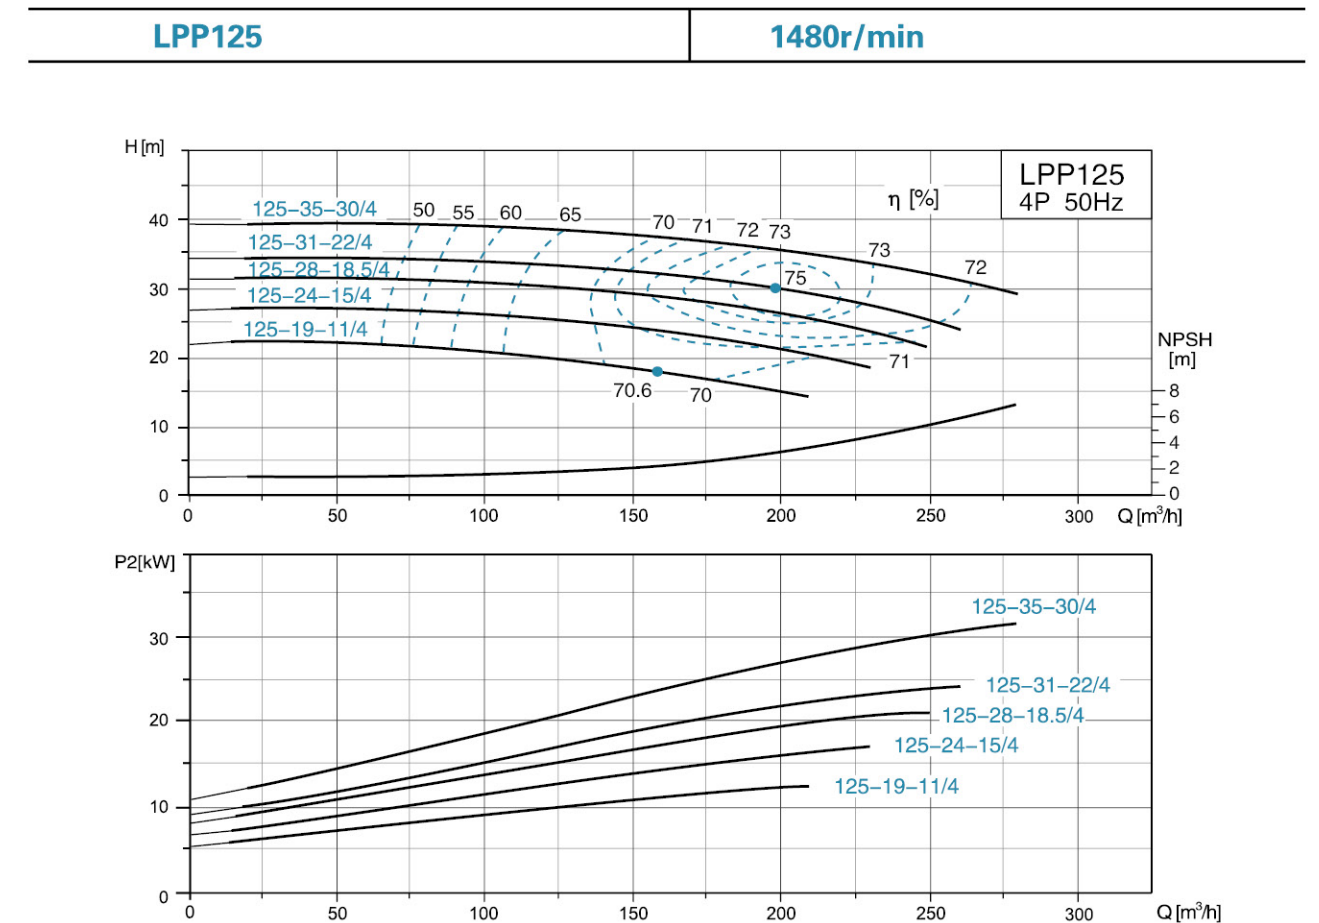


Dimension Drawing

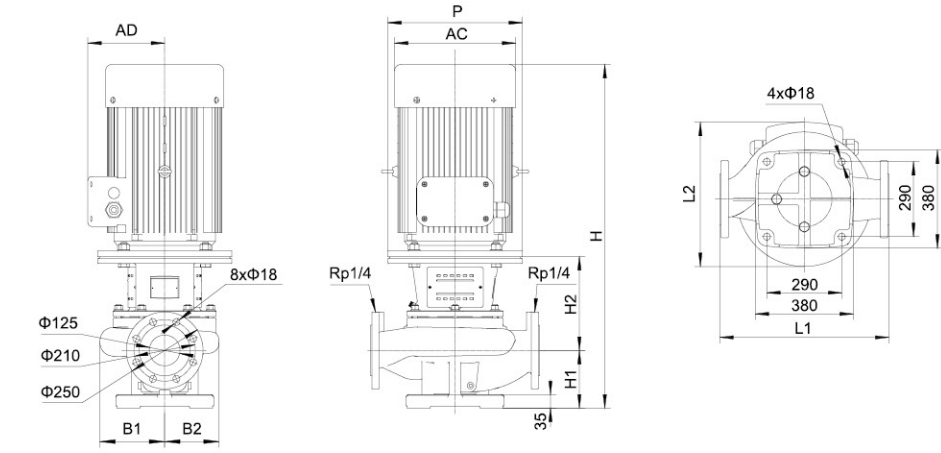


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP125-35-30/4	800	533	1190	250	280	265	228	400	305	420
LPP125-31-22/4	800	508	1160	250	275	265	228	350	280	380
LPP125-28-18.5/4	800	508	1115	250	275	265	228	350	280	380
LPP125-24-15/4	800	493	1085	250	275	265	228	350	250	330
LPP125-19-11/4	800	493	1035	250	275	265	228	350	250	330

Hydraulic Performance Curves

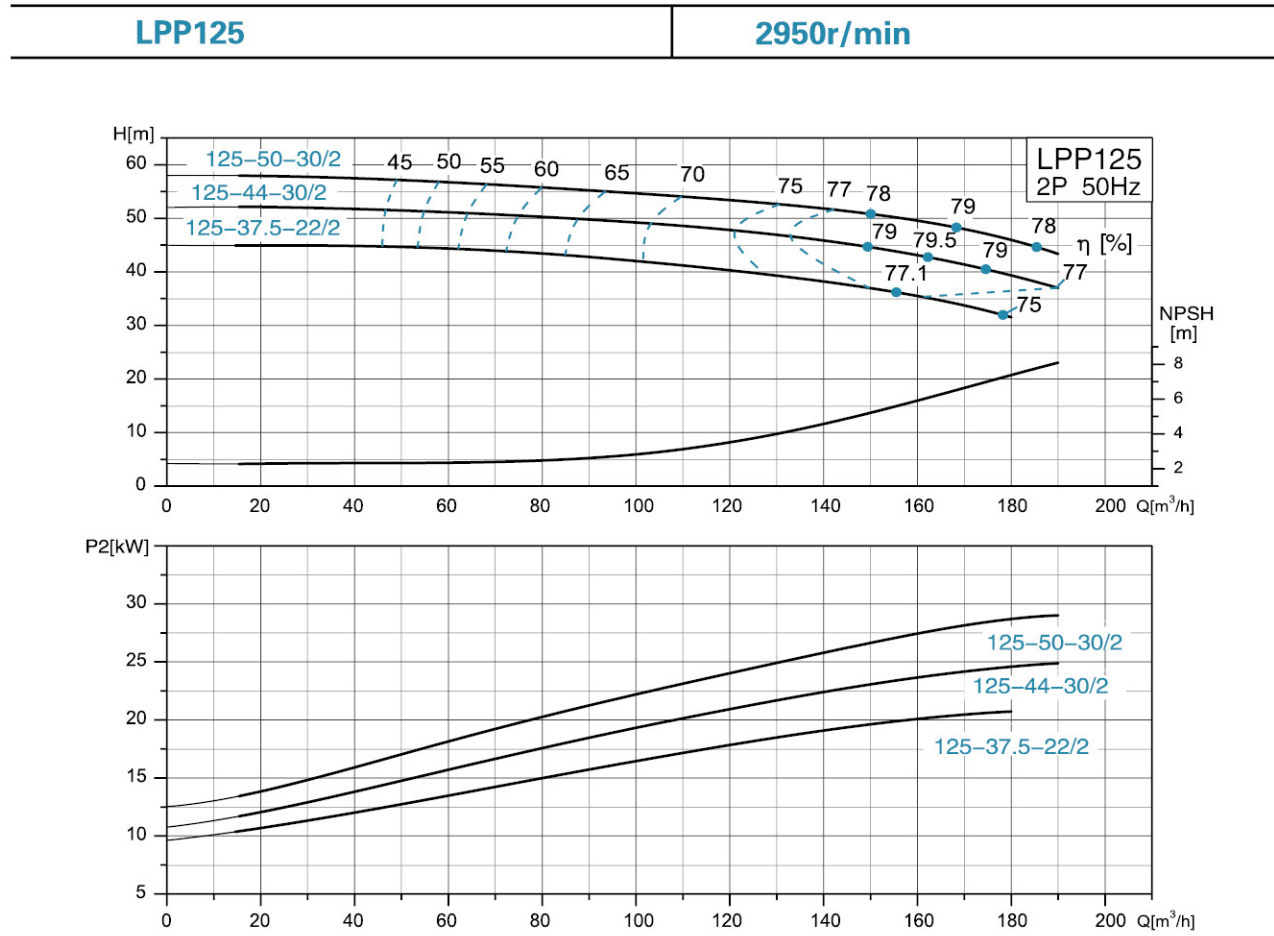


Dimension Drawing

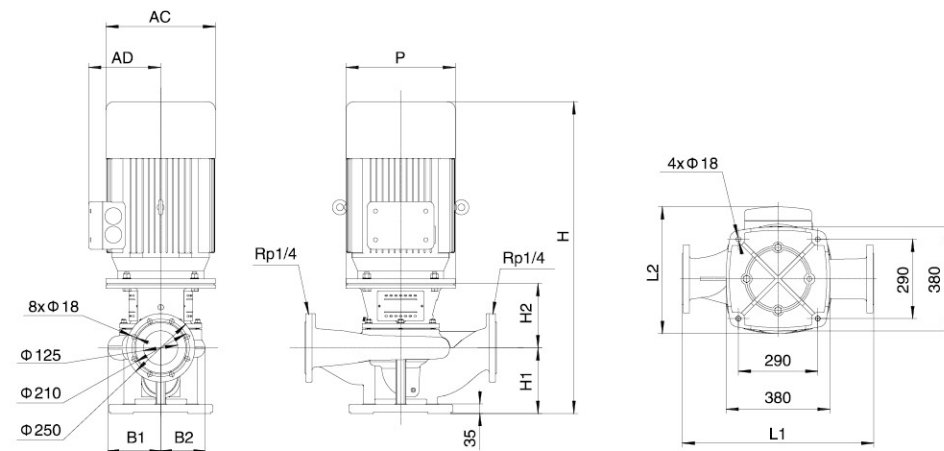


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP125-50-30/2	700	515	1155	240	235	193	161	400	305	420
LPP125-44-30/2	700	515	1155	240	235	193	161	400	305	420
LPP125-37.5-22/2	700	470	1068	240	228	193	161	350	280	380

Hydraulic Performance Curves

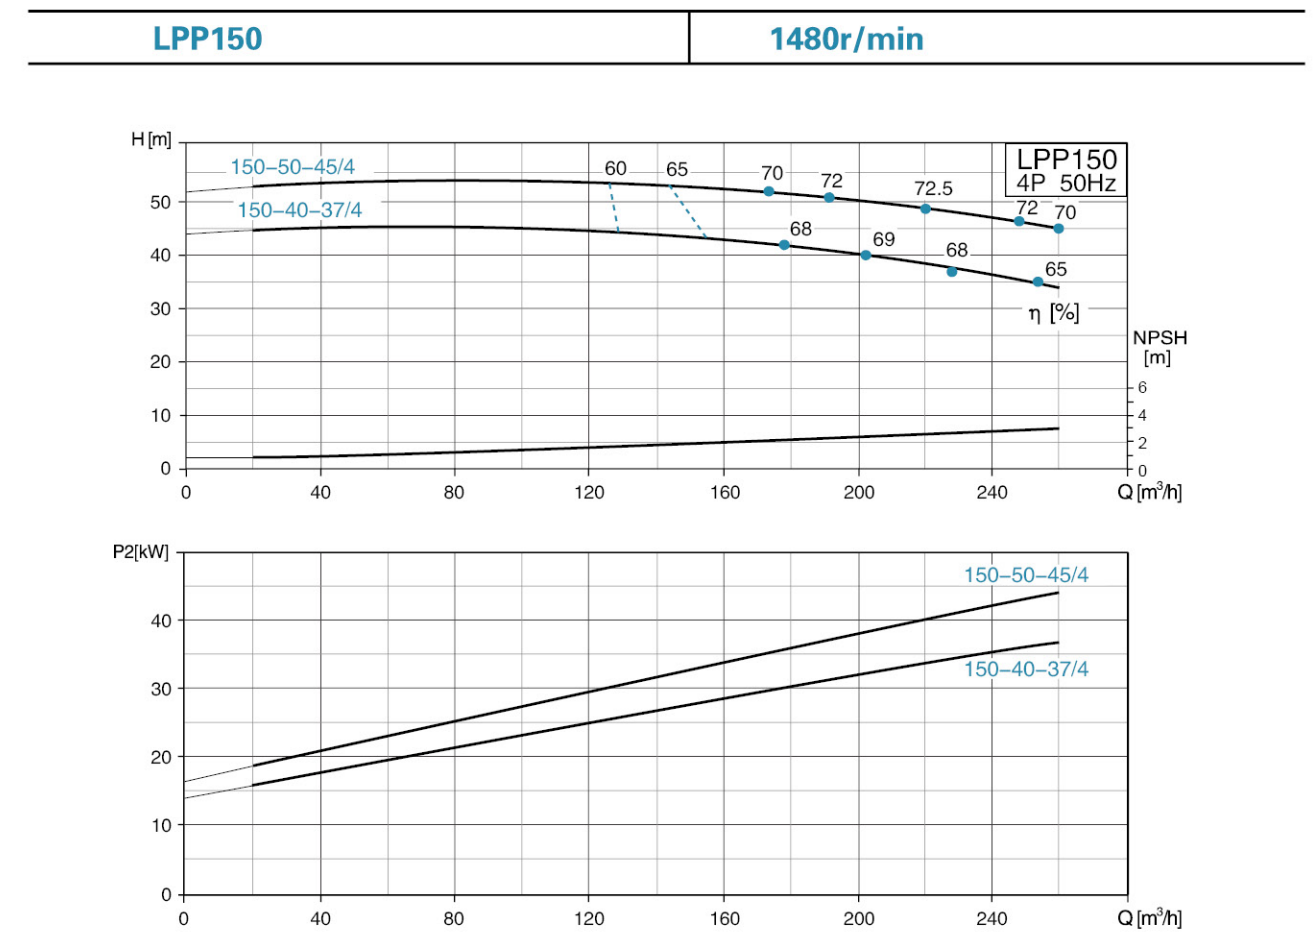



Dimension Drawing

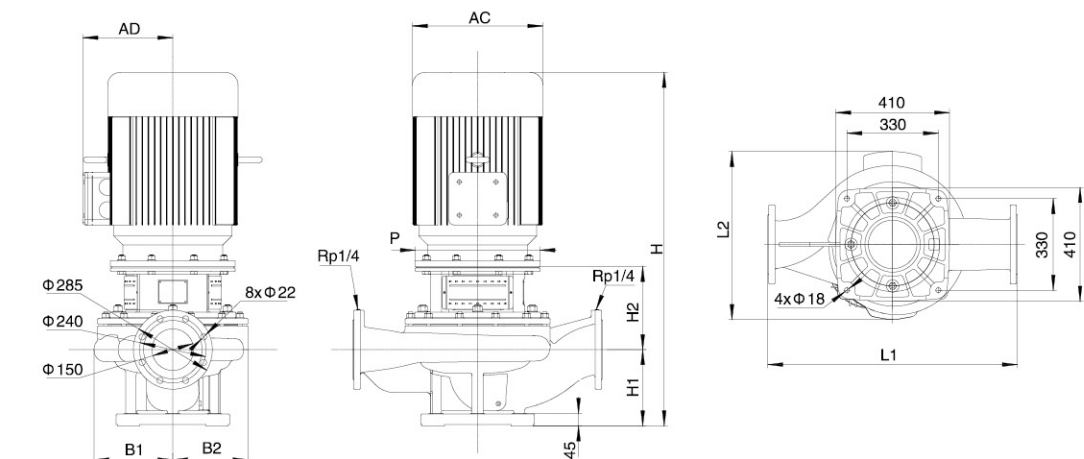


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP150-50-45/4	900	606	1275	275	300	335	271	450	335	470
LPP150-40-37/4	900	606	1250	275	300	335	271	450	335	470

Hydraulic Performance Curves

LPP150	1480r/min
---------------	------------------

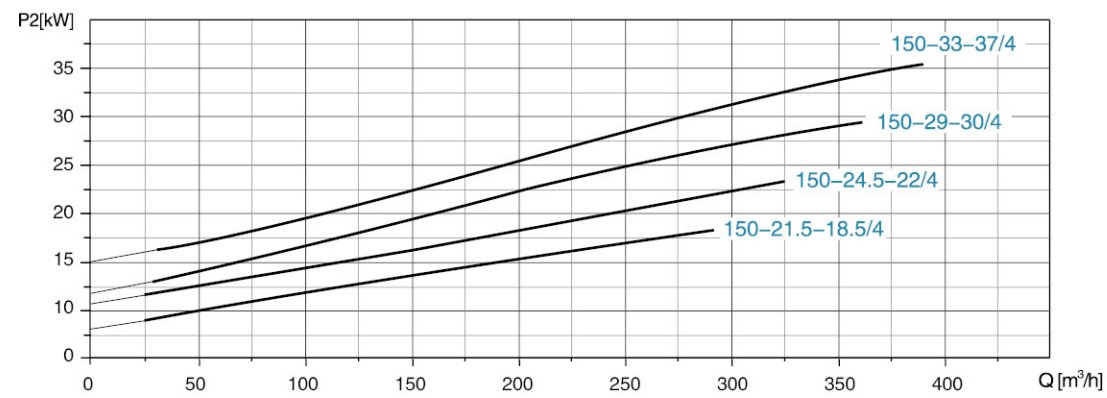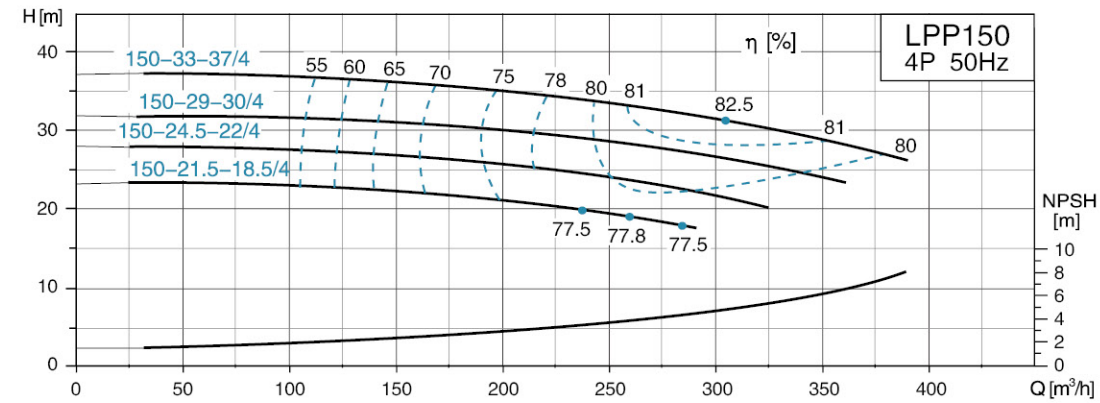



Dimension Drawing

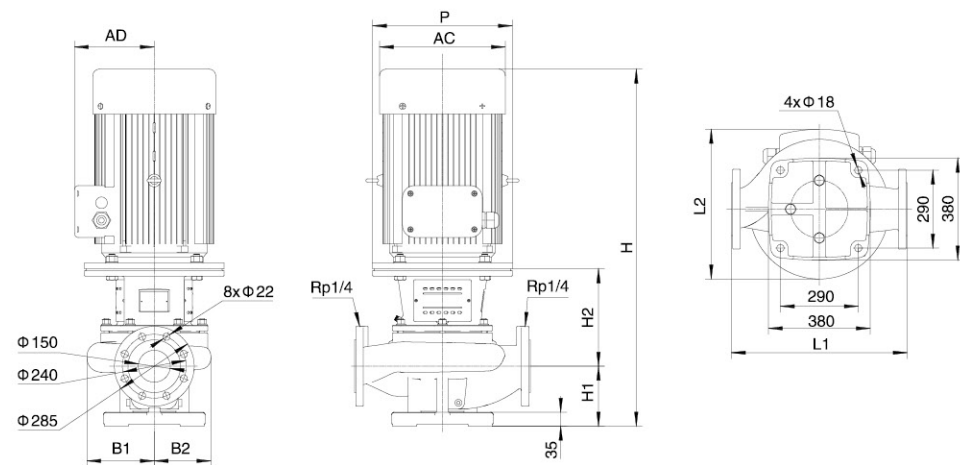


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP150-33-37/4	800	575	1240	235	330	291	240	450	335	470
LPP150-29-30/4	800	545	1225	235	300	291	240	400	305	420
LPP150-24.5-22/4	800	531	1165	235	295	291	240	350	280	380
LPP150-21.5-18.5/4	800	531	1120	235	295	291	240	350	280	380

Hydraulic Performance Curves

LPP150	1480r/min
---------------	------------------

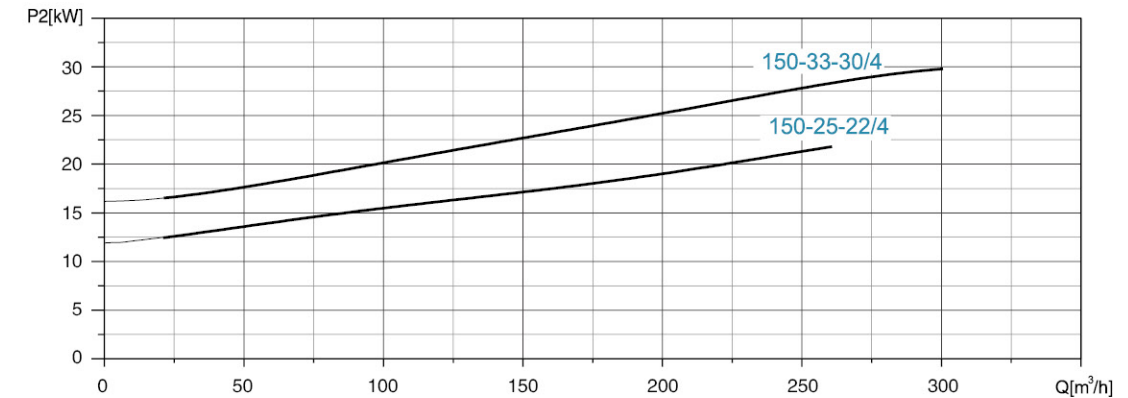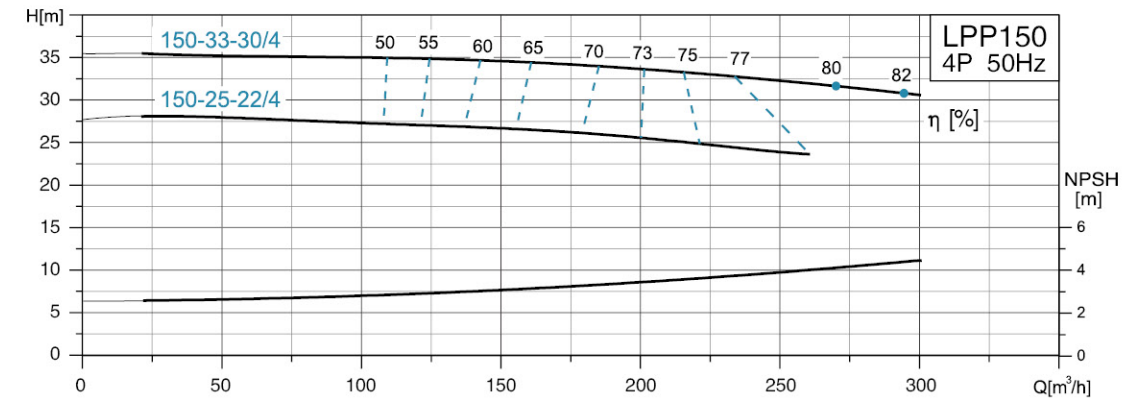


Dimension Drawing

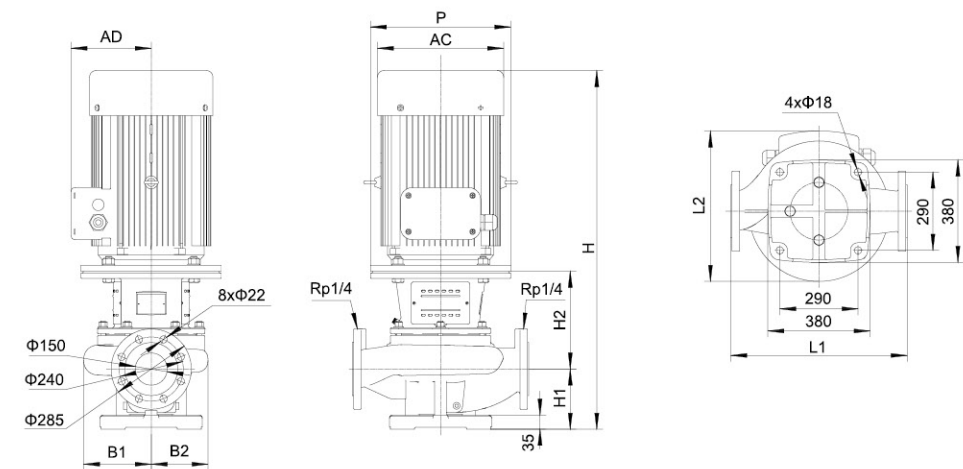


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP150-33-30/4	800	545	1195	235	300	291	240	400	305	420
LPP150-25-22/4	800	531	1165	235	295	291	240	350	280	380

Hydraulic Performance Curves

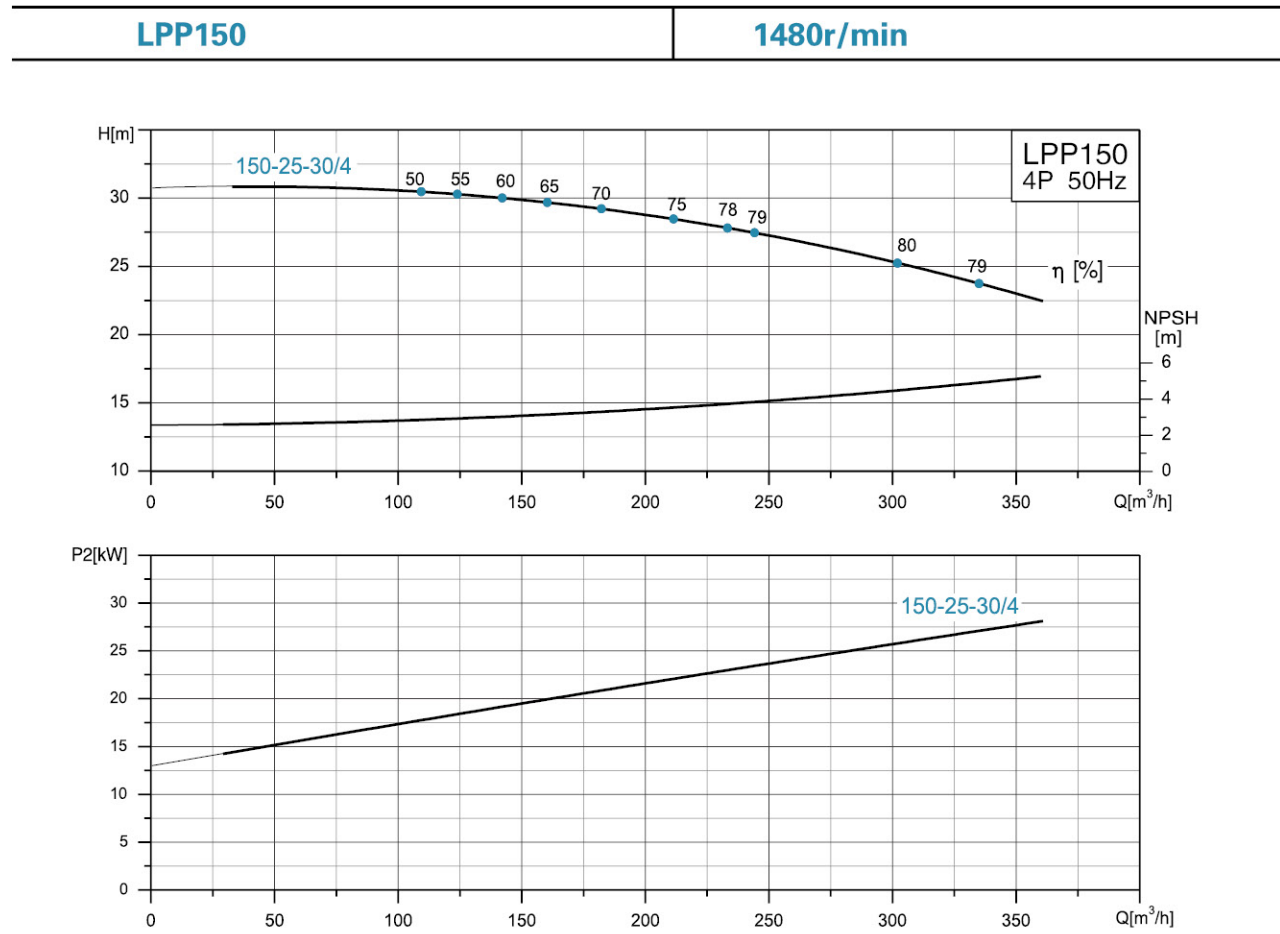


Dimension Drawing

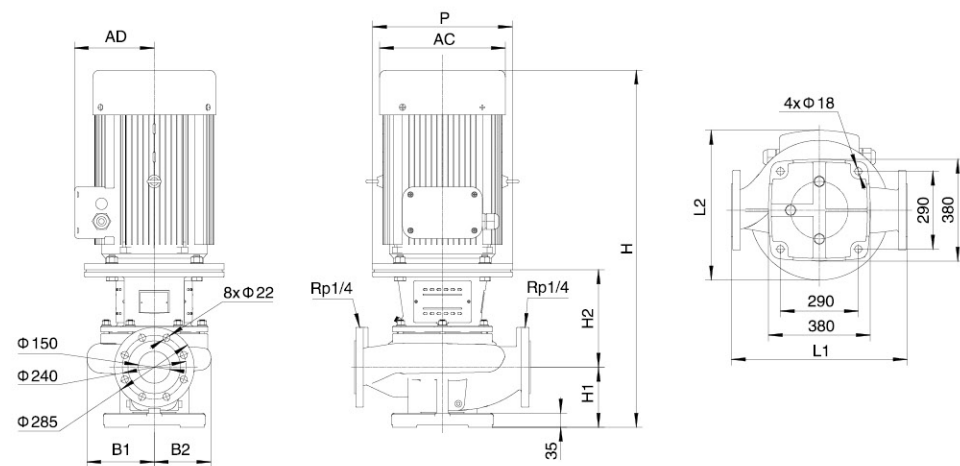


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP150-25-30/4	800	545	1195	235	300	291	240	400	305	420

Hydraulic Performance Curves

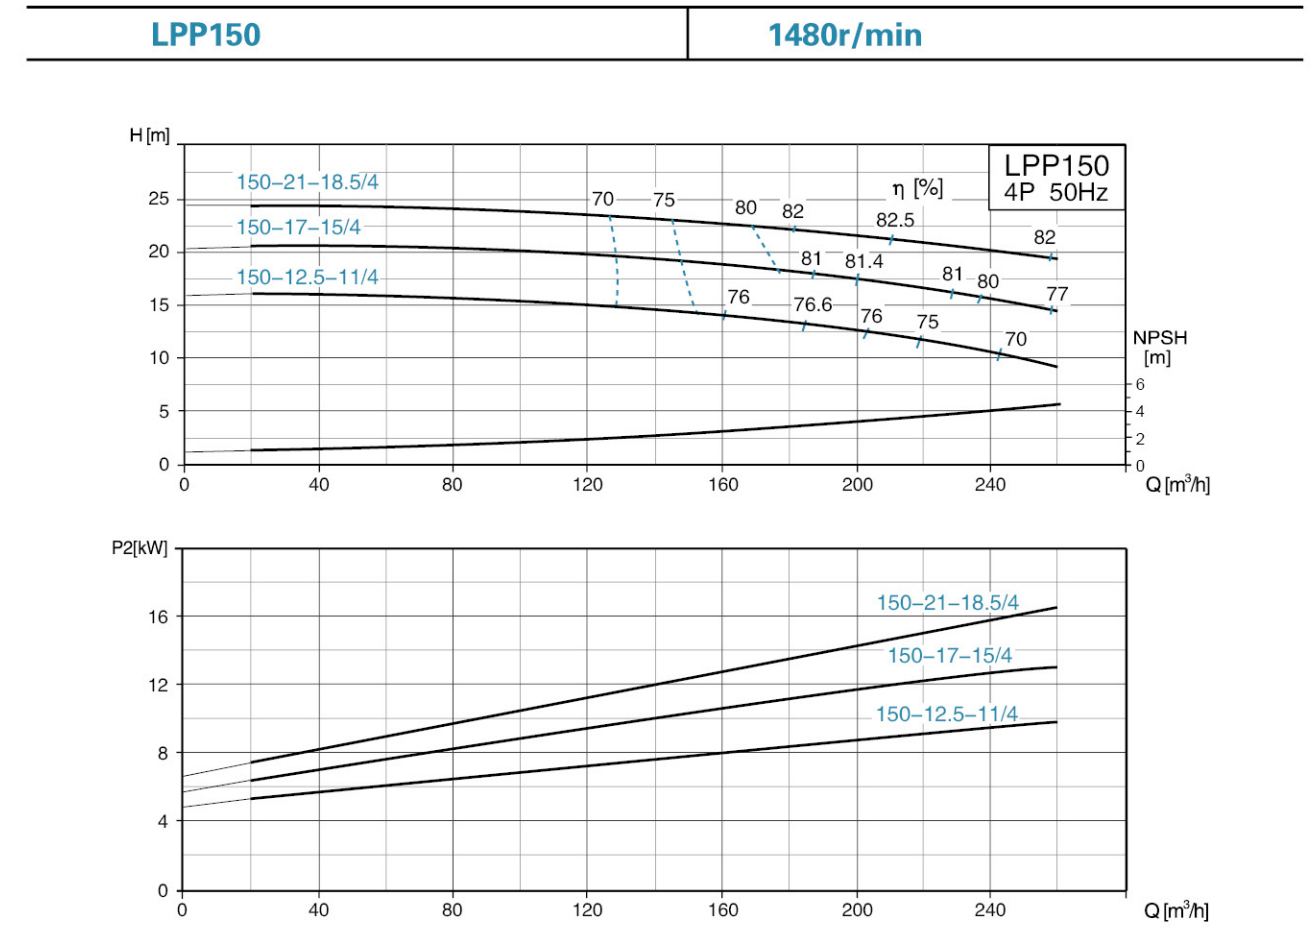


Dimension Drawing

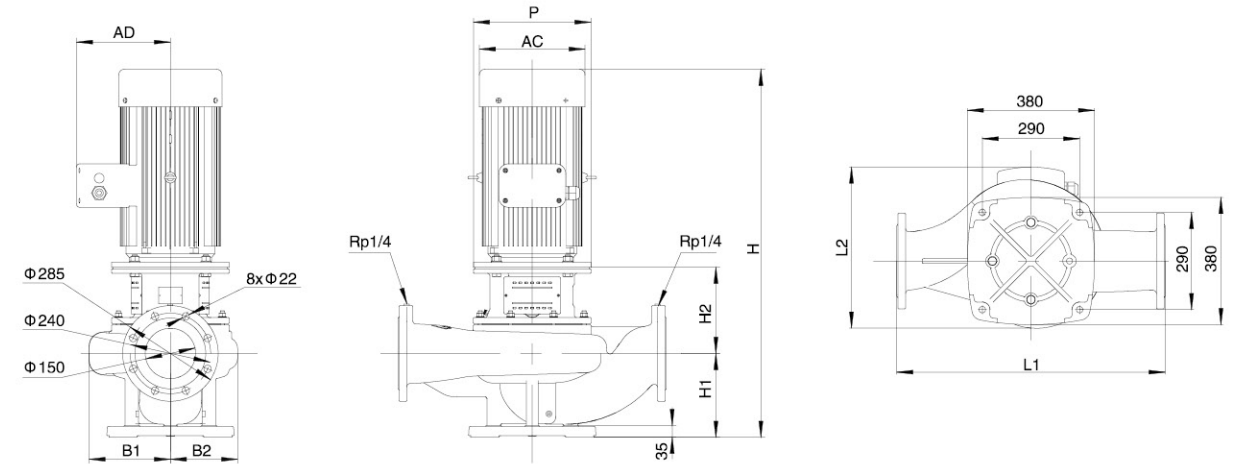


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP150-21-18.5/4	800	479	1097	250	257	241	199	350	280	380
LPP150-17-15/4	800	449	1067	250	257	241	199	350	250	330
LPP150-12.5-11/4	800	449	1012	250	257	241	199	350	250	330

Hydraulic Performance Curves

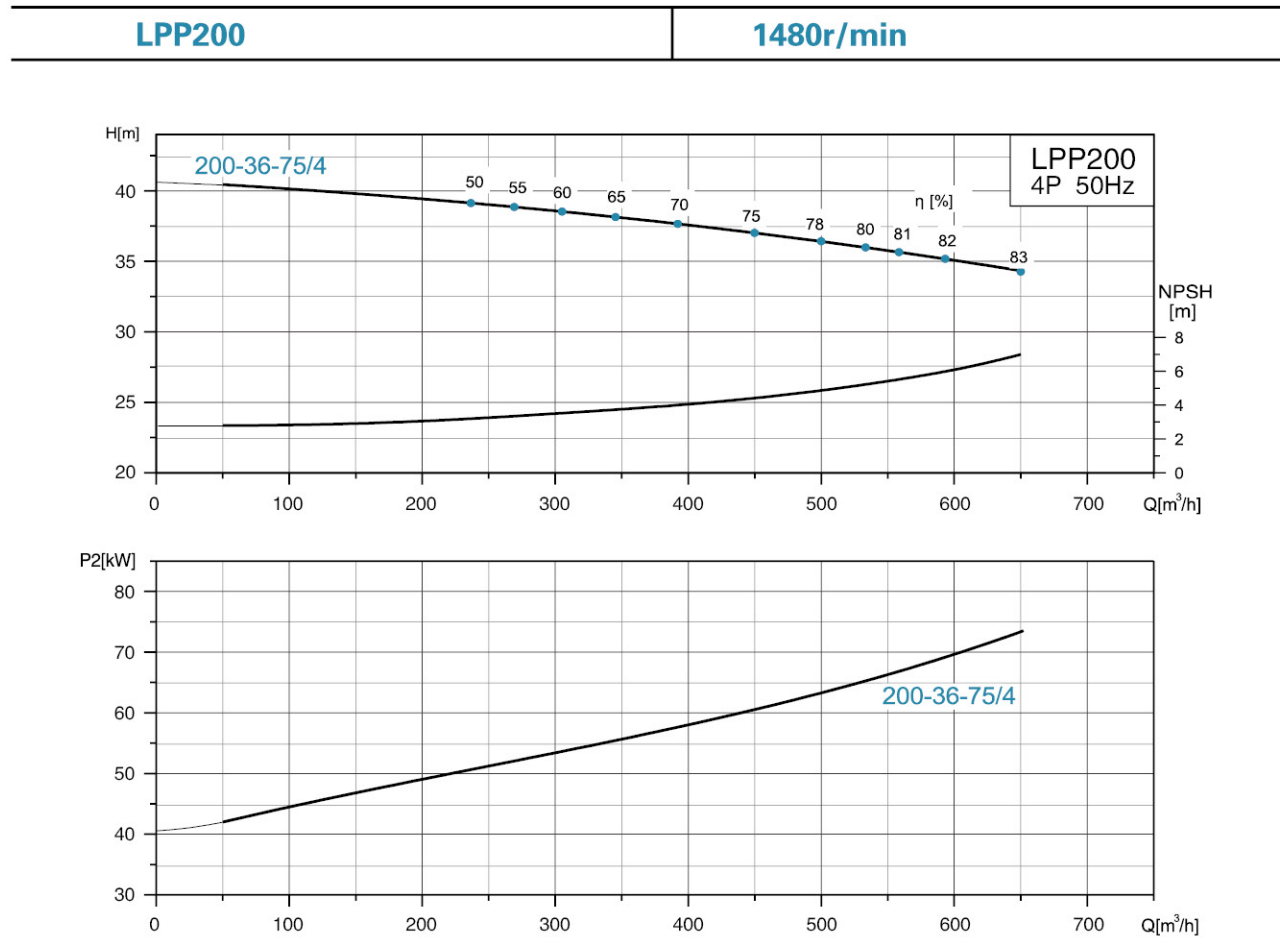


Dimension Drawing

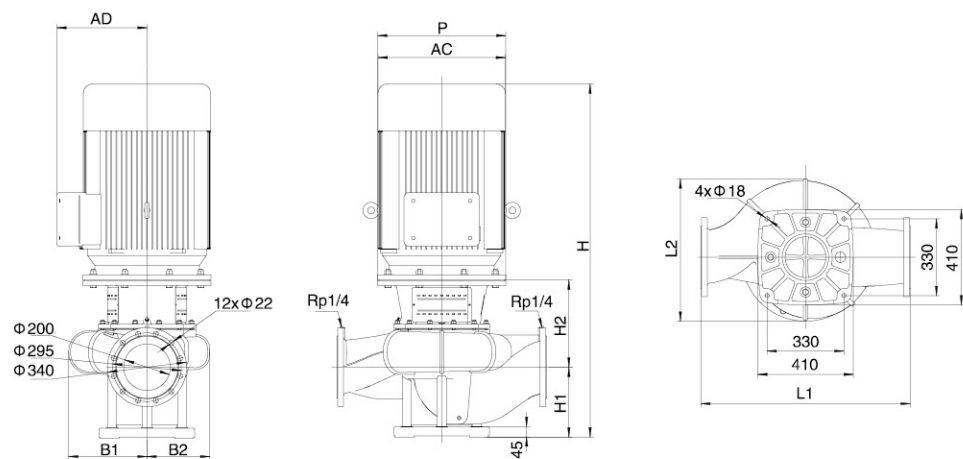


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP200-36-75/4	900	700	1520	300	375	337	270	550	410	580

Hydraulic Performance Curves

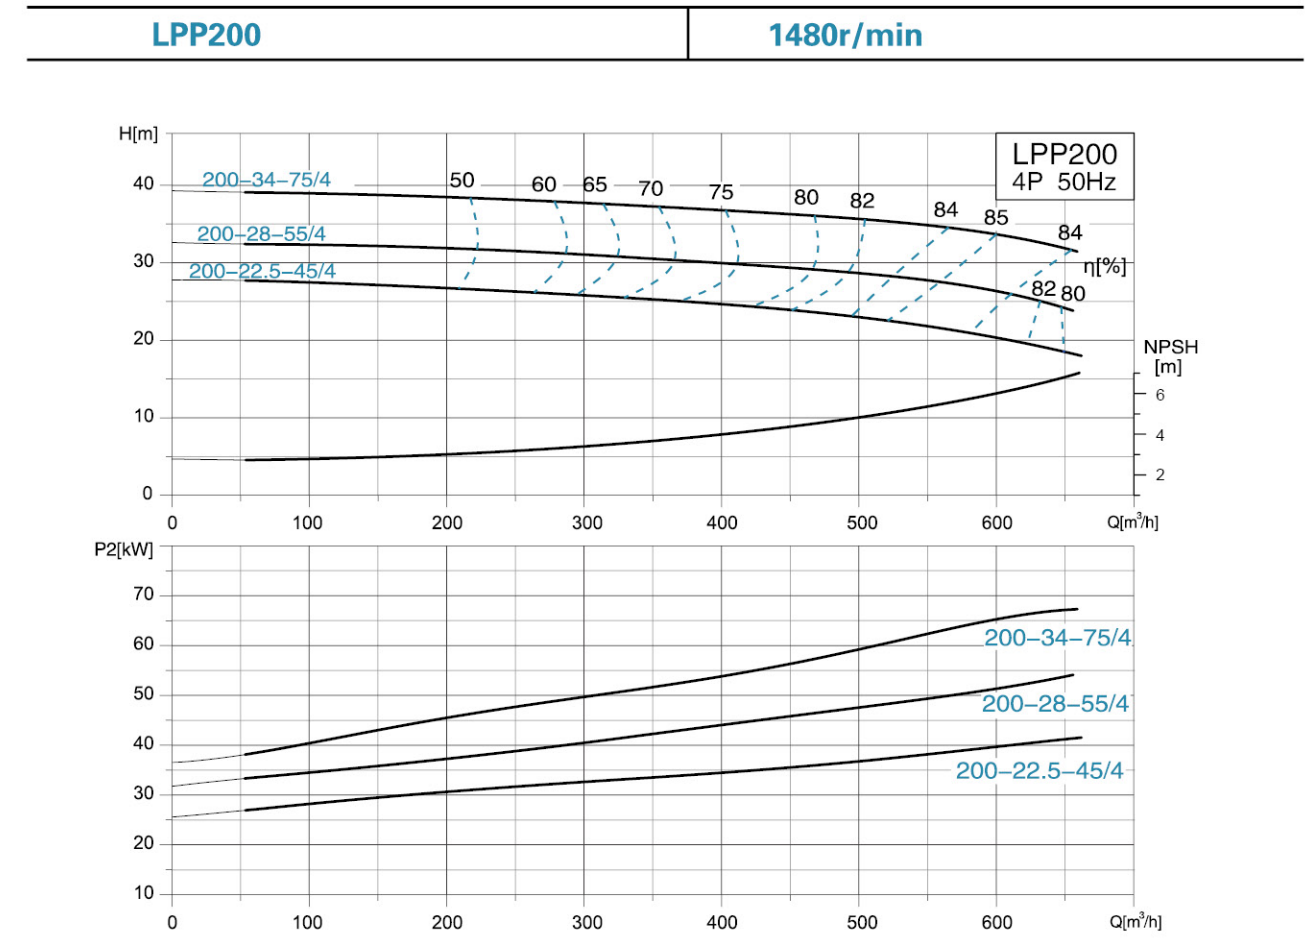


Dimension Drawing

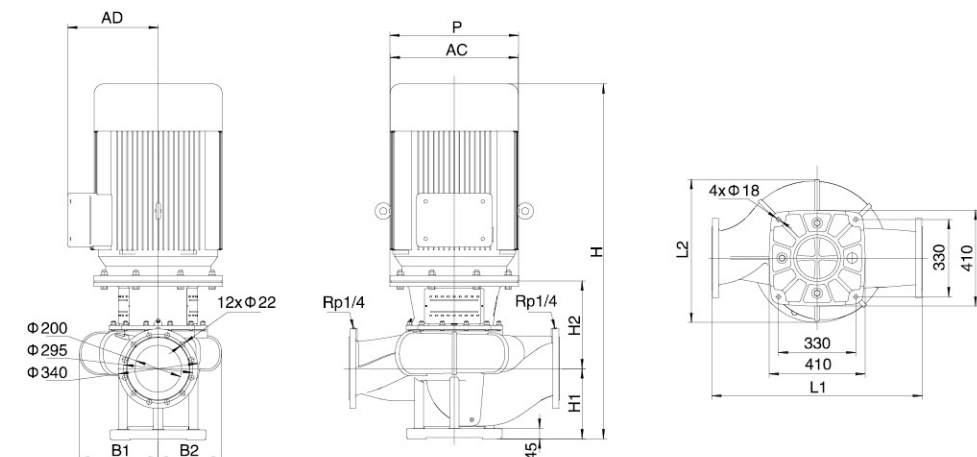


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP200-34-75/4	900	700	1520	300	375	337	270	550	410	580
LPP200-28-55/4	900	640	1435	300	375	337	270	550	370	510
LPP200-22.5-45/4	900	607	1365	300	365	337	270	450	335	470

Hydraulic Performance Curves

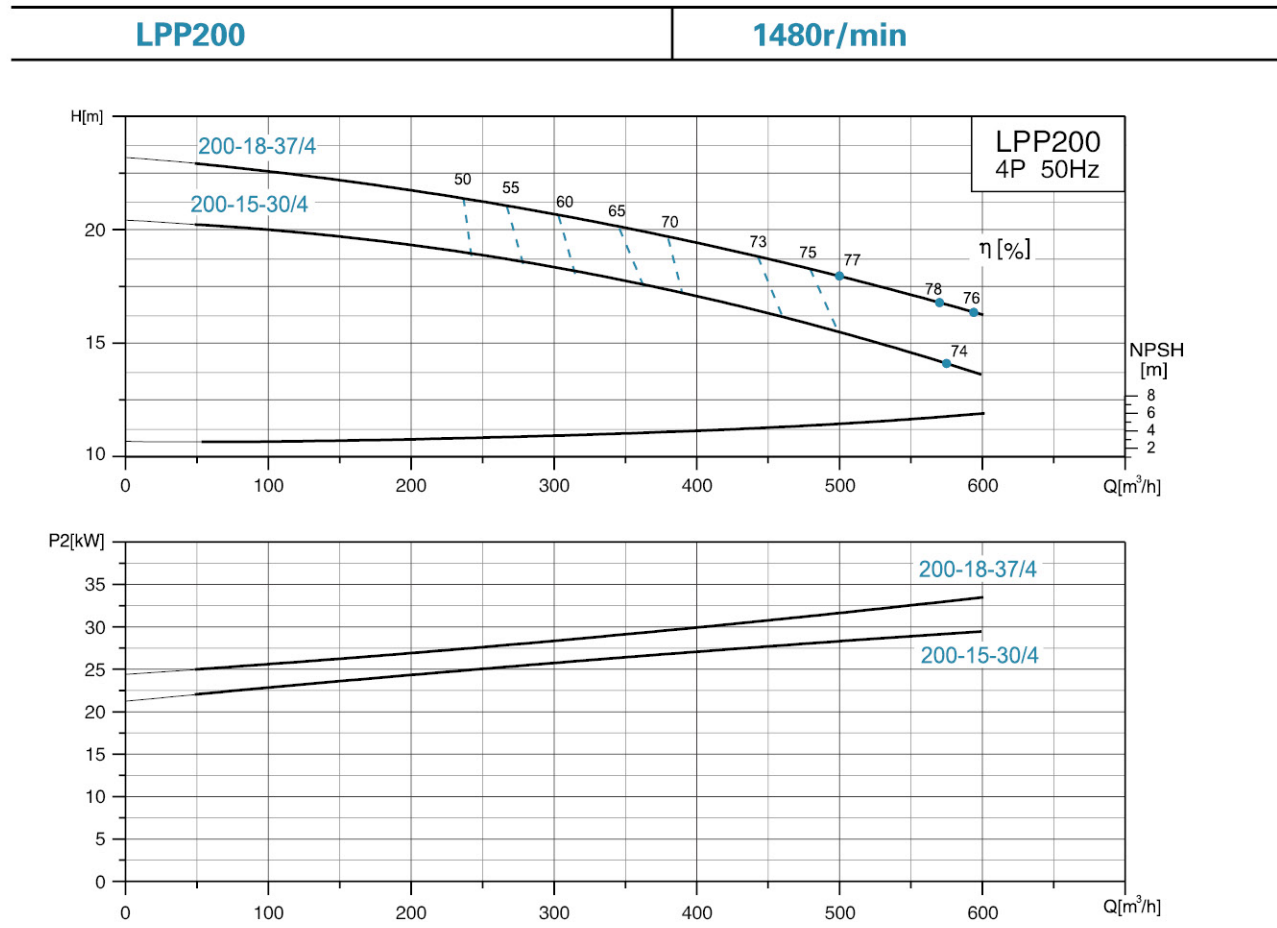


Dimension Drawing

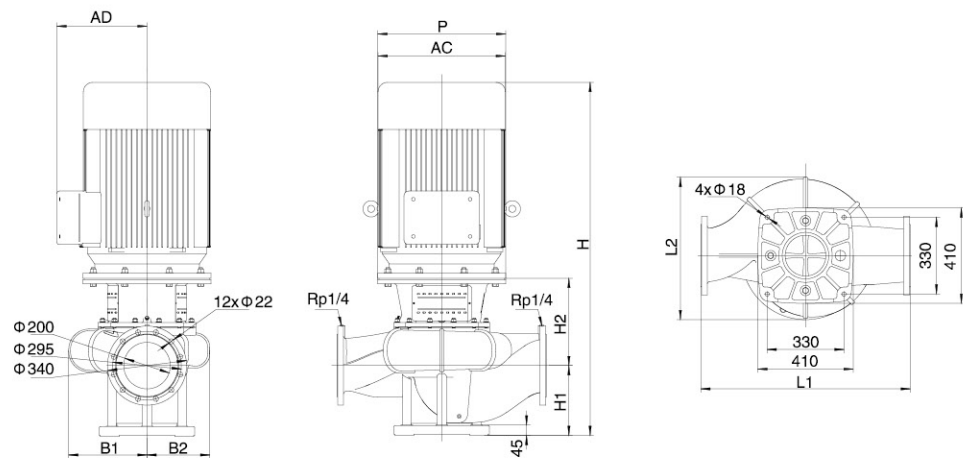


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP200-18-37/4	900	607	1340	300	365	337	270	450	335	470
LPP200-15-30/4	900	607	1295	300	335	337	270	400	305	420

Hydraulic Performance Curves

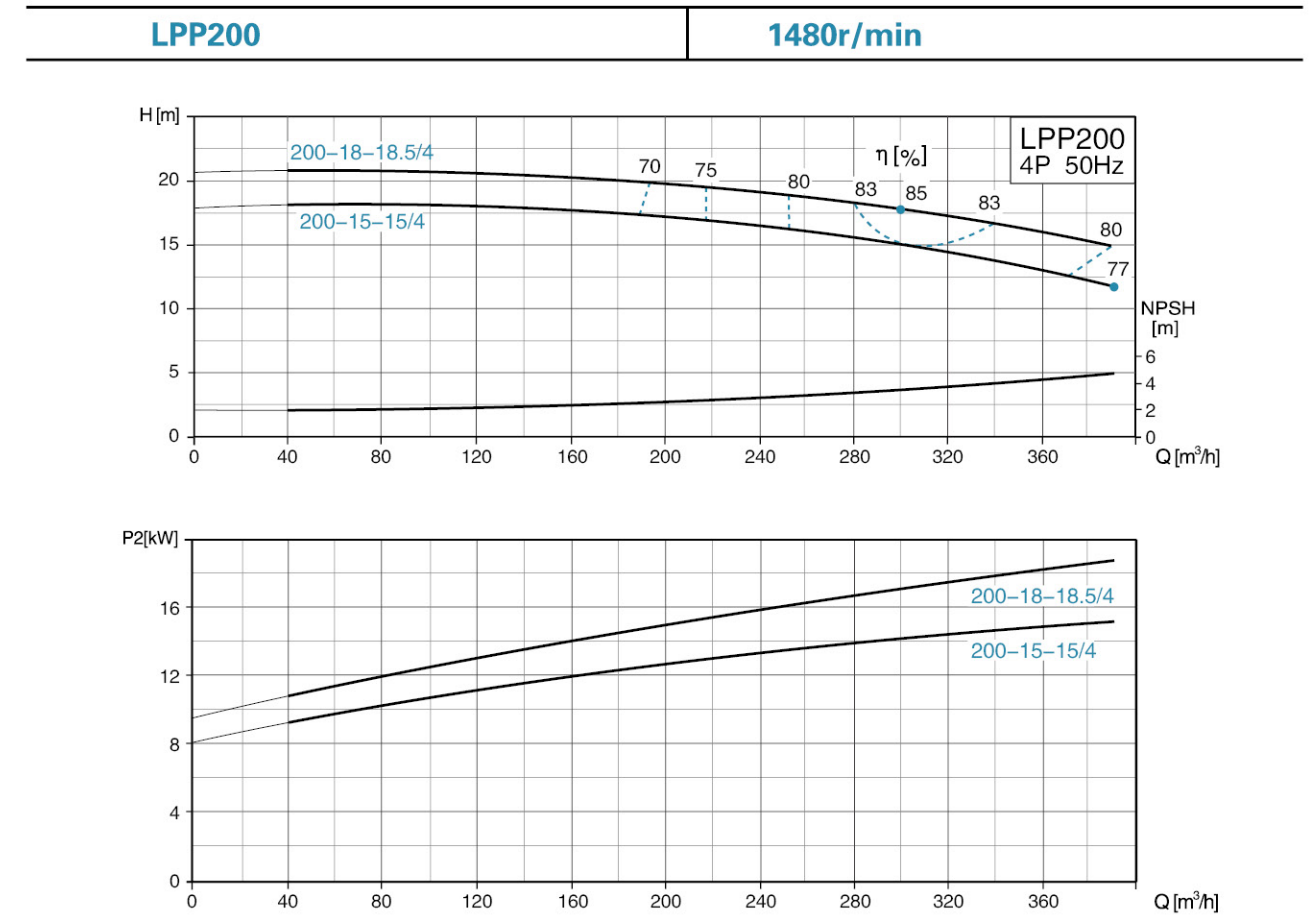


Dimension Drawing

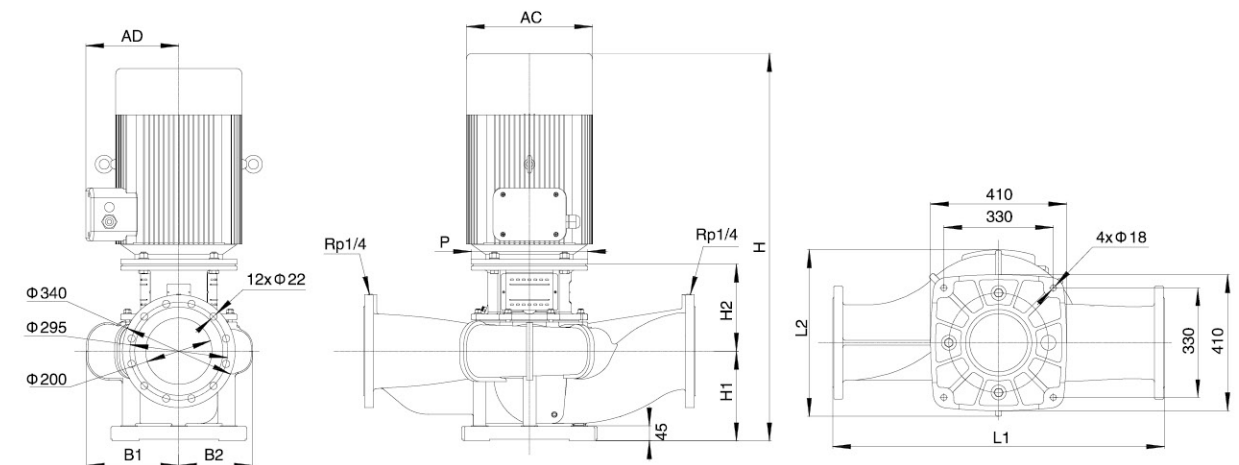


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP200-18-18.5/4	1000	501.5	1122	270	262	278.5	221.5	350	280	380
LPP200-15-15/4	1000	501.5	1092	270	262	278.5	221.5	350	280	380

Hydraulic Performance Curves

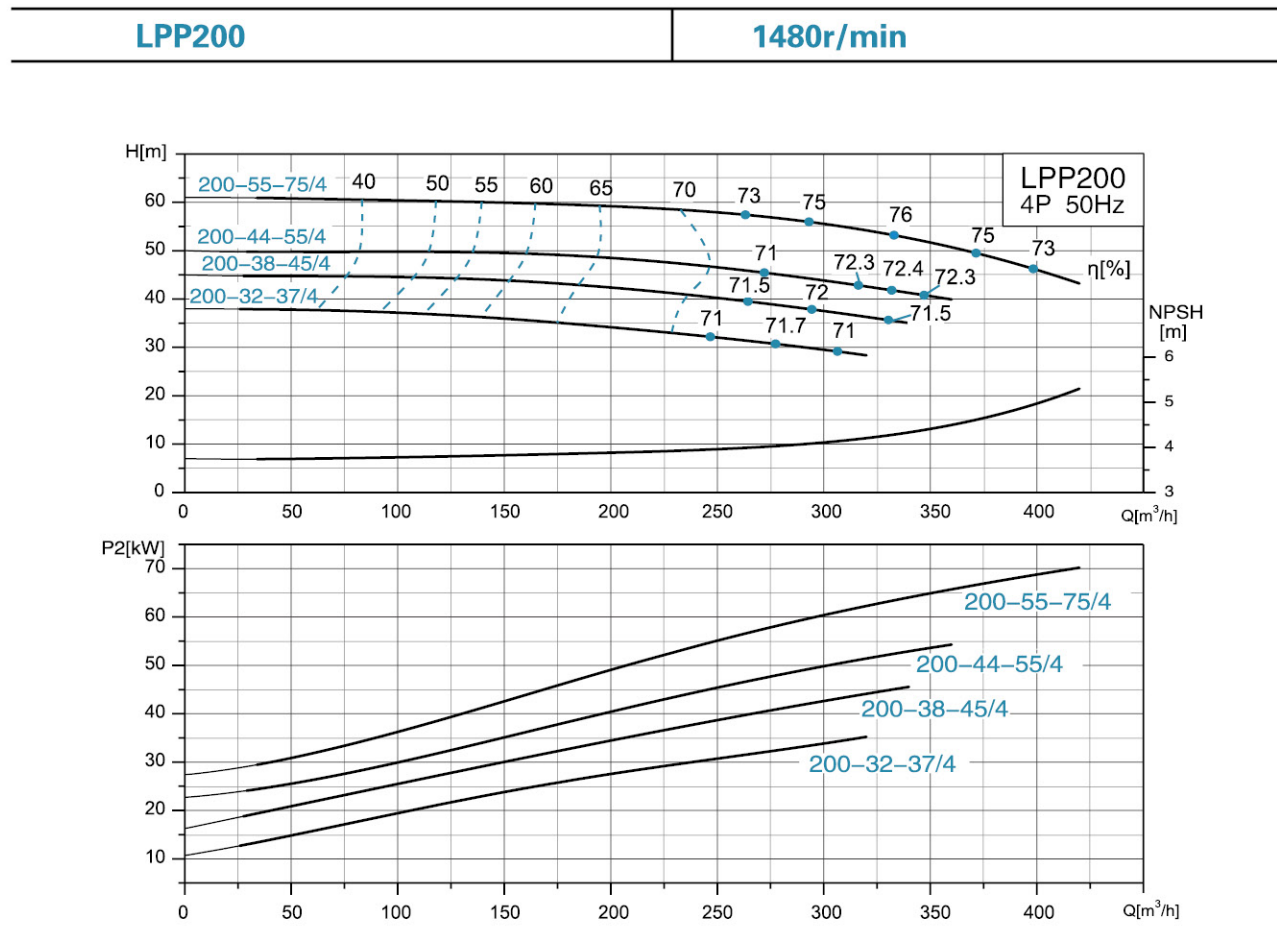


Dimension Drawing

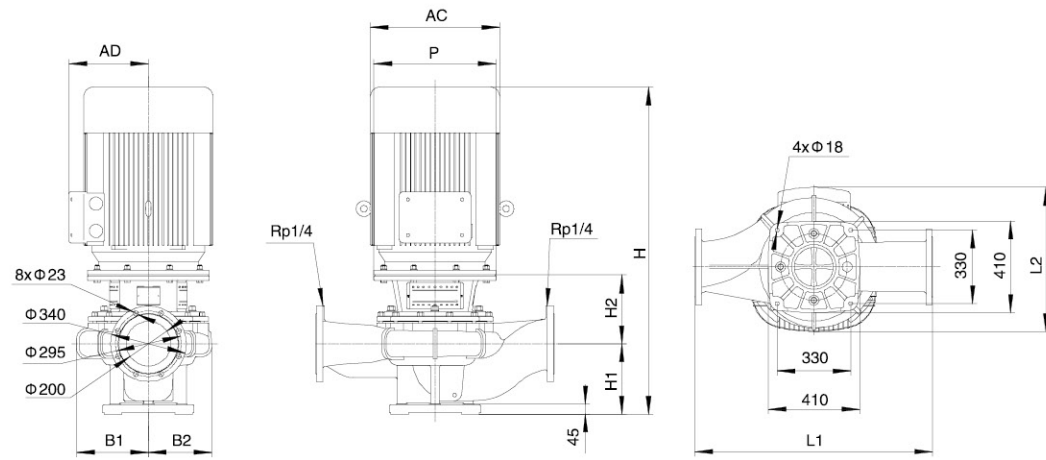


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP200-55-75/4	1070	700	1471	317	309	323	284	550	410	580
LPP200-44-55/4	1070	654	1396	317	309	323	284	550	370	510
LPP200-38-45/4	1070	619	1326	317	309	323	284	450	335	470
LPP200-32-37/4	1070	619	1301	317	309	323	284	450	335	470

Hydraulic Performance Curves

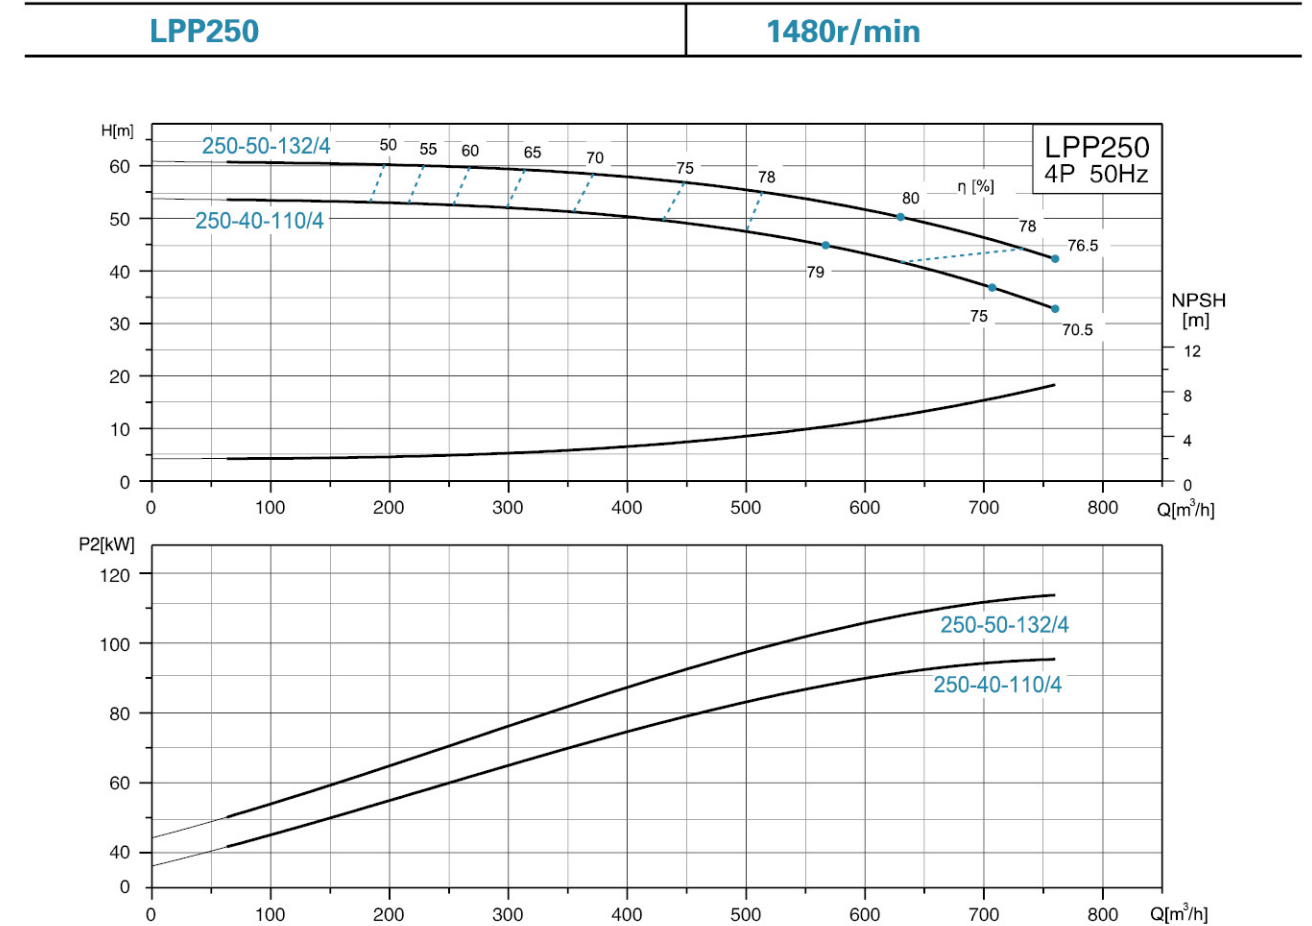


Dimension Drawing

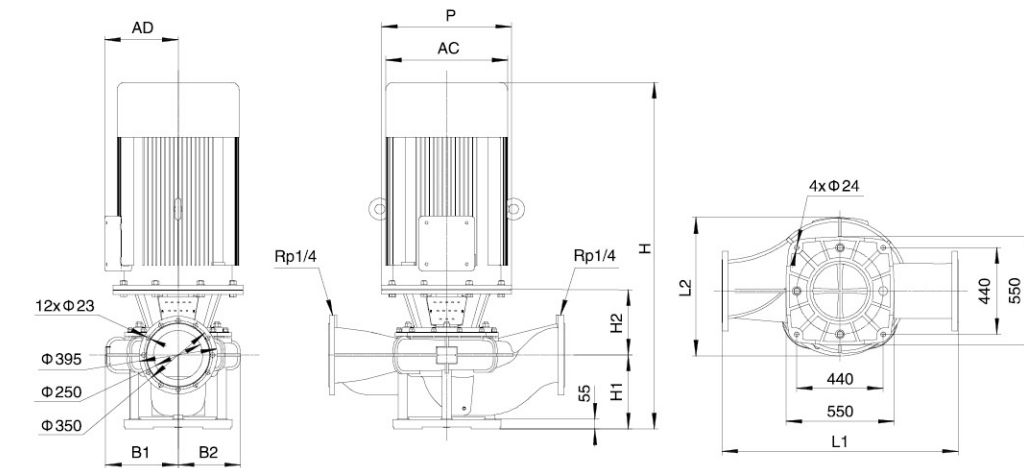


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP250-50-132/4	1200	860	1868	375	333	361	317	660	530	645
LPP250-40-110/4	1200	860	1808	375	333	361	317	660	530	645

Hydraulic Performance Curves

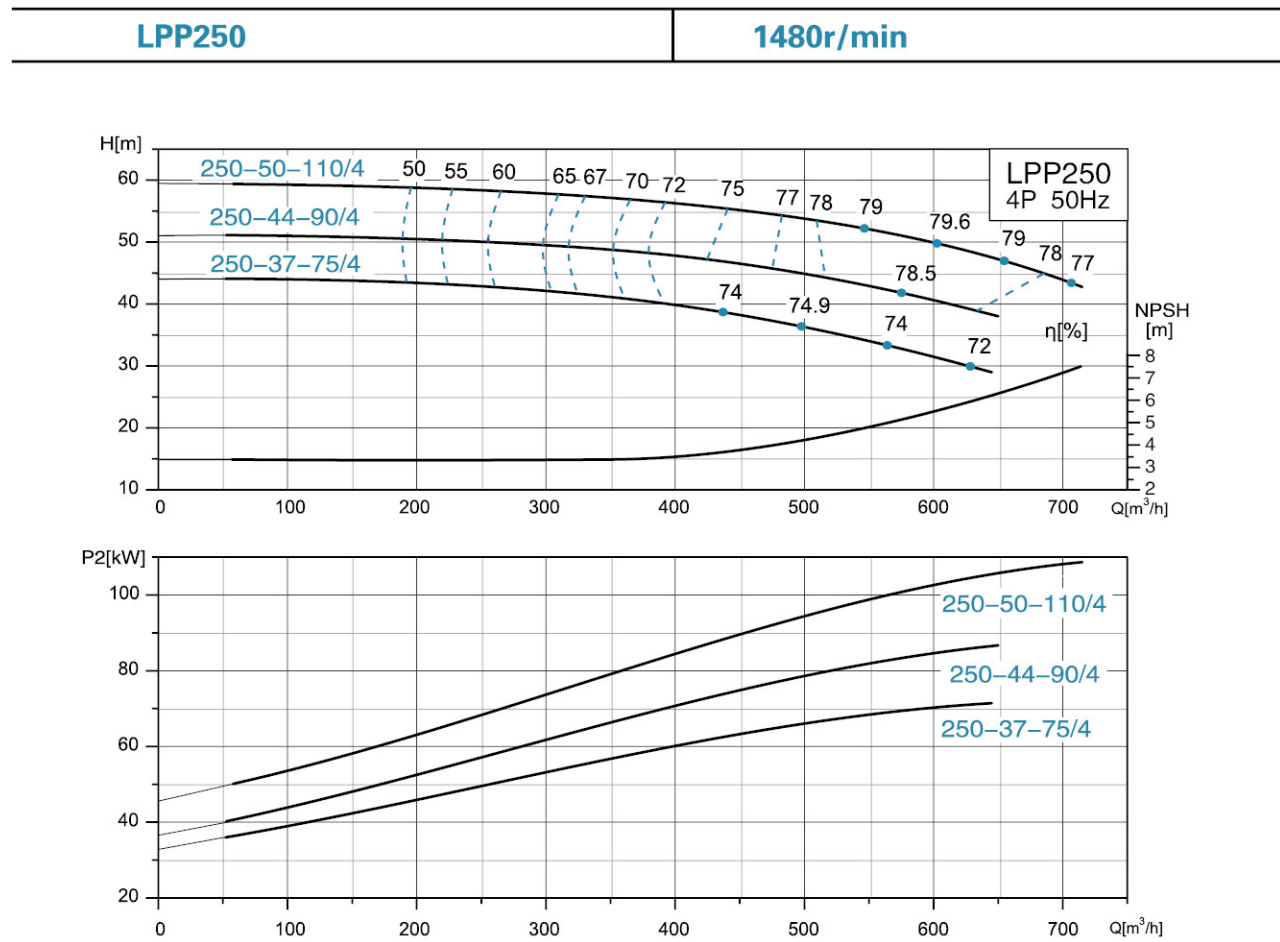

Dimension Drawing

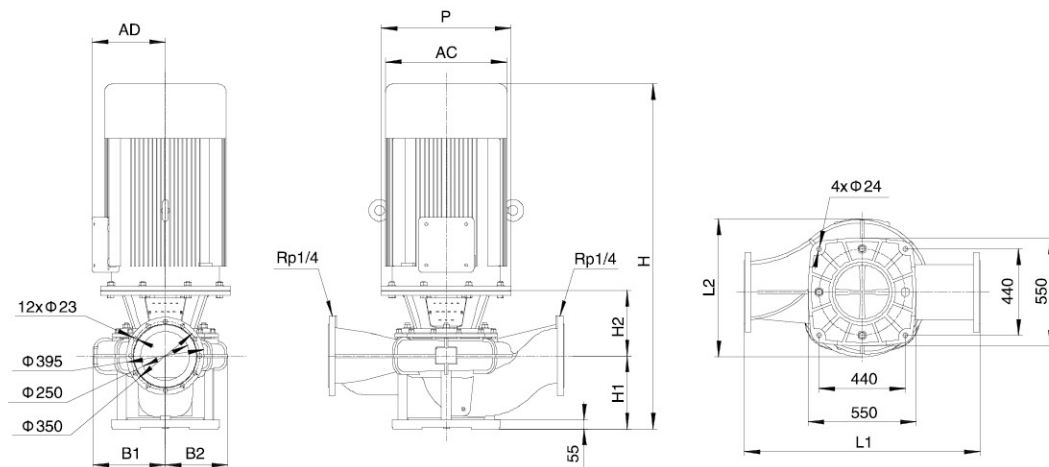


Model	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	P (mm)	AD (mm)	AC (mm)
LPP250-50-110/4	1200	860	1808	375	333	361	317	660	530	645
LPP250-44-90/4	1200	727	1573	375	303	361	317	550	410	580
LPP250-37-75/4	1200	727	1523	375	303	361	317	550	410	580

Base Plate Installation

Models that in/outlet diameter under 200mm not equipped with base plate, available on request(LPP32-8-0.37/2 & LPP32-4-0.37/2 excepted)


Base Plate 1



Model
LPP32-31-3/2
LPP32-26-2.2/2
LPP32-21-1.5/2
LPP32-16-1.1/2
LPP40-31-4/2
LPP40-24.5-3/2
LPP40-20.5-2.2/2
LPP40-20.5-1.5/2

Model
LPP40-17.5-1.1/2
LPP40-13-0.75/2
LPP50-34-5.5/2
LPP50-28-4/2
LPP50-24-3/2
LPP50-21-2.2/2
LPP50-16-1.5/2
LPP50-12-1.1/2


Base Plate 2



Model
LPP32-50-5.5/2
LPP32-40-4/2
LPP50-81-22/2
LPP50-70-18.5/2
LPP50-60-15/2
LPP50-80-11/2
LPP50-70-7.5/2
LPP50-60-7.5/2
LPP50-50-5.5/2
LPP50-40-4/2
LPP50-35-3/2
LPP65-56-18.5/2
LPP65-49-15/2
LPP65-40-11/2

Model
LPP65-35-7.5/2
LPP65-28-5.5/2
LPP65-21-4/2
LPP65-17-3/2
LPP65-14-2.2/2
LPP80-35-15/2
LPP80-28-11/2
LPP80-21.5-7.5/2
LPP80-20-5.5/2
LPP80-17-4/2
LPP80-14-3/2
LPP80-10.5-2.2/2
LPP80-8.5-1.5/2

Base Plate 3




Model
LPP80-80-22/2
LPP80-70-18.5/2
LPP80-60-15/2
LPP80-28-11/4
LPP80-22-7.5/4
LPP80-19-5.5/4
LPP100-80-37/2
LPP100-70-30/2
LPP100-60-22/2
LPP100-50-22/2
LPP100-44-18.5/2
LPP100-16-7.5/4
LPP100-32-22/2
LPP100-30-18.5/2
LPP100-24-15/2
LPP100-20-11/2
LPP100-32-22/4
LPP100-30-18.5/4
LPP100-25-15/4

Model
LPP100-21-11/4
LPP125-50-30/2
LPP125-44-30/2
LPP125-37.5-22/2
LPP125-35-30/4
LPP125-31-22/4
LPP125-28-18.5/4
LPP125-24-15/4
LPP125-19-11/4
LPP150-33-37/4
LPP150-29-30/4
LPP150-24.5-22/4
LPP150-21.5-18.5/4
LPP150-33-30/4
LPP150-25-22/4
LPP150-25-30/4
LPP150-21-18.5/4
LPP150-17-15/4
LPP150-12.5-11/4

Base Plate Installation

Models that in/outlet diameter under 200mm not equipped with base plate, available on request(LPP32-8-0.37/2 & LPP32-4-0.37/2 excepted)


Base Plate 4



Model
LPP150-50-45/4
LPP150-40-37/4
LPP200-55-75/2
LPP200-36-75/4
LPP200-34-75/4
LPP200-44-55/4
LPP200-28-55/4
LPP200-38-45/4
LPP200-22.5-45/4
LPP200-32-37/4



Model
LPP200-18-37/4
LPP200-15-30/4
LPP200-18-18.5/4
LPP200-15-15/4

Base Plate 5



Model
LPP250-50-132/4
LPP250-50-110/4
LPP250-40-110/4
LPP250-44-90/4
LPP250-37-75/4


Pedestal Installation

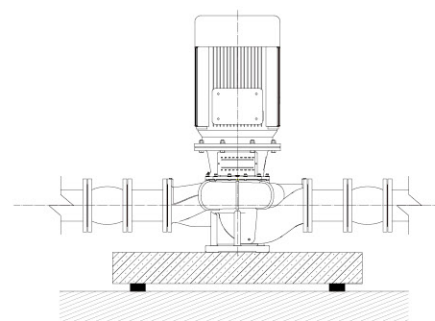

Model	Weight (kg)	X (mm)	Y (mm)	Z (mm)
LPP50-81-22/2	245	670	670	330
LPP50-70-18.5/2	206	670	670	330
LPP50-60-15/2	158	565	565	280
LPP65-56-18.5/2	186	565	565	280
LPP65-49-15/2	180	565	565	280
LPP65-40-11/2	176	565	565	280
LPP80-35-15/2	187	565	565	280
LPP80-28-11/2	173	565	565	280
LPP80-21.5-7.5/2	128	565	565	280
LPP80-28-11/4	238	670	670	330
LPP80-22-7.5/4	181	565	565	280
LPP80-19-5.5/4	168	565	565	280
LPP80-80-22/2	265	710	710	360

Pedestal Installation

Model	Weight (kg)	X (mm)	Y (mm)	Z (mm)
LPP80-70-18.5/2	220	670	670	330
LPP80-60-15/2	178	565	565	280
LPP100-50-22/2	267	710	710	360
LPP100-44-18.5/2	222	670	670	330
LPP100-38-15/2	180	565	565	280
LPP100-80-37/2	341	750	750	375
LPP100-70-30/2	330	750	750	375
LPP100-60-22/2	276	710	710	360
LPP100-32-22/2	330	750	750	375
LPP100-30-18.5/2	293	710	710	360
LPP100-24-15/2	270	710	710	360
LPP100-20-11/2	256	670	670	330
LPP100-32-22/4	345	750	750	375
LPP100-30-18.5/4	327	750	750	375
LPP100-25-15/4	286	710	710	360
LPP100-21-11/4	261	670	670	330
LPP100-16-7.5/4	222	670	670	330
LPP125-35-30/4	415	780	780	390
LPP125-31-22/4	352	750	750	375
LPP125-28-18.5/4	335	750	750	375
LPP125-24-15/4	305	710	710	360
LPP125-19-11/4	286	710	710	360
LPP125-50-30/2	347	750	750	375
LPP125-44-30/2	346	750	750	375
LPP125-37.5-22/2	290	710	710	360
LPP150-50-45/4	634	970	970	470
LPP150-40-37/4	570	870	870	440
LPP150-33-37/4	503	840	840	420
LPP150-29-30/4	475	840	840	420
LPP150-33-30/4	459	840	840	420
LPP150-25-22/4	377	780	780	390
LPP150-25-30/4	457	840	840	420
LPP150-24.5-22/4	410	780	780	390
LPP150-21.5-18.5/4	390	780	780	390
LPP150-21-18.5/4	346	750	750	375
LPP150-17-15/4	311	750	750	375
LPP150-12.5-11/4	293	710	710	360
LPP200-36-75/4	894	1050	1050	510
LPP200-34-75/4	860	1050	1050	510
LPP200-28-55/4	700	970	970	470
LPP200-22.5-45/4	570	870	870	440
LPP200-18-37/4	570	870	870	440
LPP200-15-30/4	531	870	870	440
LPP200-18-18.5/4	411	780	780	390
LPP200-15-15/4	376	780	780	390
LPP200-55-75/4	957	1050	1050	510
LPP200-44-55/4	762	970	970	470
LPP200-38-45/4	654	970	970	470
LPP200-32-37/4	633	970	970	470
LPP250-50-132/4	1608	1250	1250	620
LPP250-40-110/4	1512	1250	1250	620
LPP250-50-110/4	1512	1250	1250	620
LPP250-44-90/4	1134	1100	1100	550
LPP250-37-75/4	1092	1100	1100	550

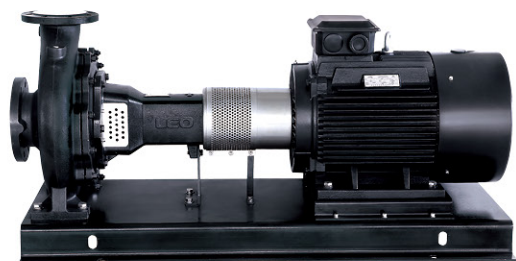

Application

- Water supply systems
- Pressure boosting
- Heating systems for commercial buildings and district heating
- Cooling plants for industrial processing and air-conditioning units
- General transport for industrial processes
- Fire fighting system

Pump

- Liquid PH value: 4 - 10
- Liquid temperature: 0°C - 90°C
- Power range: 2.2 - 30 kW
- Max head: 39.5 m
- Max operation pressure: 10 bar
- Altitude: up to 1,000 m


Motor

- Insulation class: F
- Protection class: IP55
- IE 2 motor as standard. IE 3 motor is available on request

Flange

- EN 1092 and DIN 2576 standard

Identification Codes

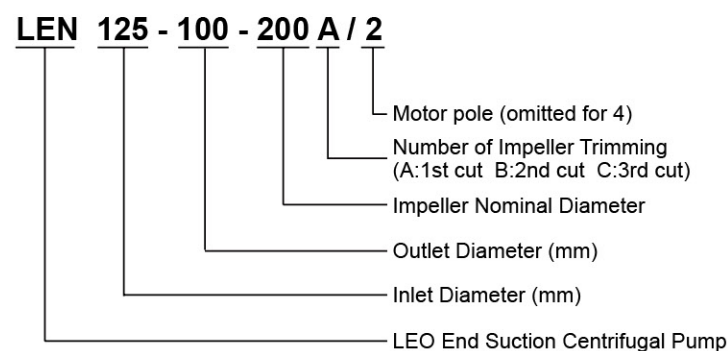


Ambient Temperature

Max. Ambient temperature: +40°C. Ambient temperature above 40°C, or installation at altitude of more than 1000 m above sea level, require the use of an oversize motor.

Because of low air density and poor cooling effects, the motor output power P2 will be decreased. See the picture.


For example, when the pump is installed at altitude of more than 3500 m above sea level, P2 will be decrease to 88%.

When the ambient temperature is 70°C, P2 will be decreased to 78%.

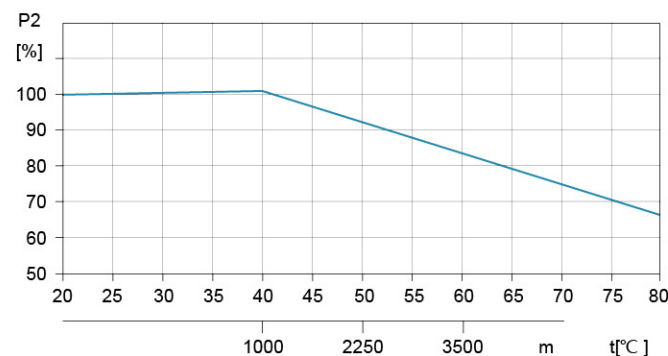


Materials Table

No.	Part	Material
1	Pump body	Cast iron
2	Impeller	Cast iron
3	Mechanical seal	Carbon/Silicon carbide
4	Pump cover	Cast iron
5	Bearing base	Cast iron
6	Pump shaft	Steel/AISI 304
7	Coupling	
8	Motor	
9	Base plate	Iron

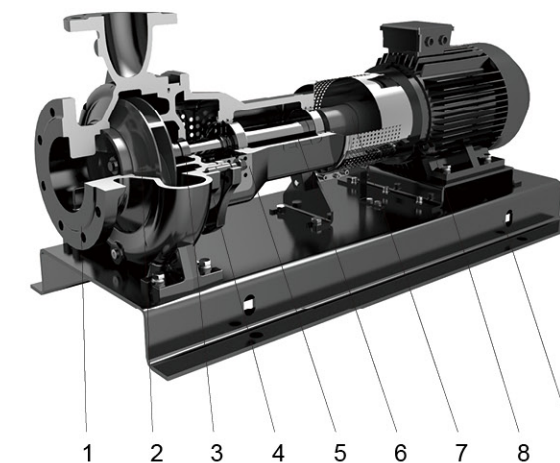

How to Read The Curve Charts

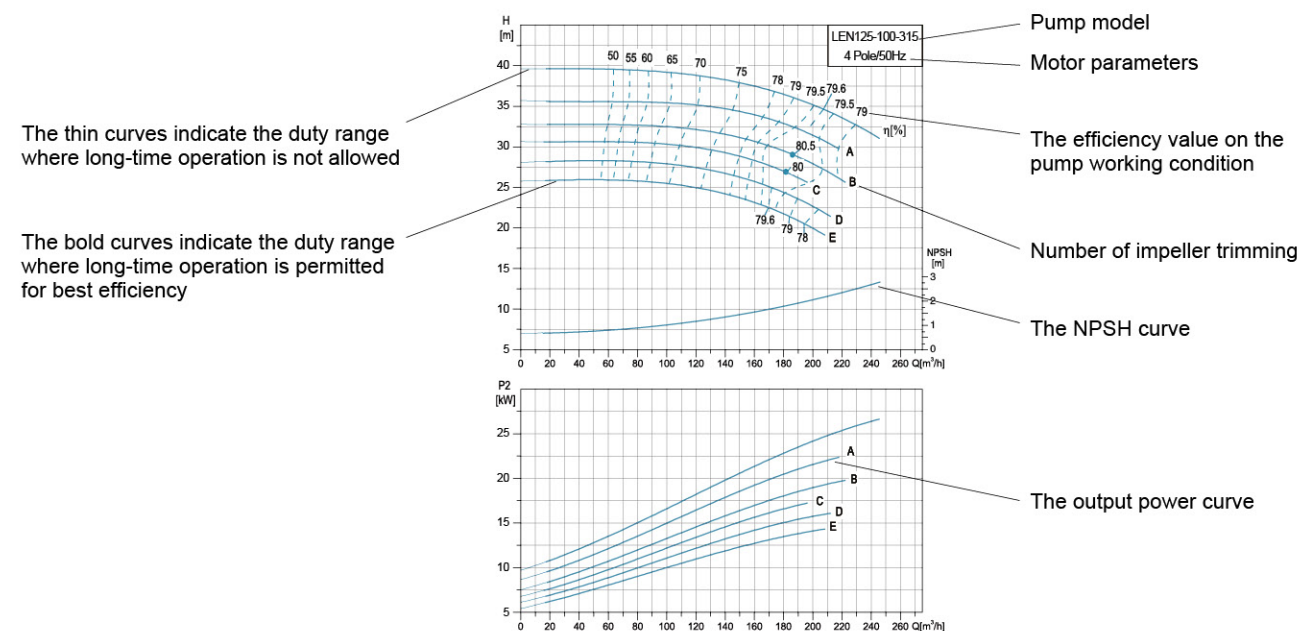


Guidelines to Performance Curves

Tolerances to ISO 9906, Annex A. Measurements have been made with airless water at a temperature of 20°C and kinematic viscosity of 1mm²/s. To avoid overheating of the motor, the pump should not be use against a high head for a long time.

Hydraulic Performance Curves



Model	Power (kW)	Rated Flow (m³/h)	Rated Head (m)	Max. Flow (m³/h)	Min. Flow (m³/h)	NPSH (m)
LEN125-80-200	5.5	100	14.5	120	70	2
LEN125-80-200A	5.5	95	13	123.5	66.5	2
LEN125-80-200B	4	90	11.5	108	63	2
LEN125-80-200C	4	85	10.5	110.5	59.5	2
LEN125-80-200D	3	82	9.5	98.5	57.4	2
LEN125-80-200E	2.2	70	7.5	91	49	2
LEN125-100-200	7.5	150	13.5	180	105	2.8
LEN125-100-200A	7.5	145	12	188.5	101.5	2.3
LEN125-100-200B	5.5	140	10.5	168	98	2.3
LEN125-100-200C	5.5	135	9.5	175.5	94.5	2.3
LEN125-100-200D	4	130	7	156	91	2.3
LEN125-80-250	11	100	22.5	130	70	2
LEN125-80-250A	11	96	20.5	125	67.2	2
LEN125-80-250B	7.5	90	18	117	63	2
LEN125-80-250C	7.5	85	16	110.5	59.5	2
LEN125-80-250D	5.5	82	15	98.5	57.4	2
LEN125-80-250E	5.5	78	14	101.5	54.6	2
LEN125-100-250	15	160	21	208	112	2
LEN125-100-250A	15	154	19	200	107.8	2
LEN125-100-250B	11	146	17.5	190	102.2	2
LEN125-100-250C	11	140	16	182	98	2
LEN125-100-250D	11	135	14.5	175.5	94.5	2
LEN125-100-250E	7.5	130	13	156	91	2
LEN125-100-250F	7.5	128	12	166.5	89.6	2
LEN150-125-250	22	290	19	377	203	3.5
LEN150-125-250A	18.5	280	17	336	196	3.5
LEN150-125-250B	18.5	270	15.5	351	189	3.5
LEN150-125-250C	15	256	14	333	179.2	3.5
LEN150-125-250D	15	250	12.5	325	175	3.5
LEN150-125-250E	11	242	11	315	169.4	3.5
LEN125-80-315	22	130	36	169	91	2
LEN125-80-315A	18.5	125	32	162.5	87.5	2
LEN125-80-315B	15	122	29	146.5	85.4	2
LEN125-80-315C	15	116	26.5	151	81.2	2
LEN125-80-315D	15	112	24	145.5	78.4	2
LEN125-80-315E	11	106	22	138	74.2	2
LEN125-100-315	30	185	35	240.5	129.5	2.2
LEN125-100-315A	22	178	30.5	213.5	124.6	2.2
LEN125-100-315B	22	172	28	223.5	120.4	2.2
LEN125-100-315C	18.5	166	28	199	116.2	2.2
LEN125-100-315D	18.5	162	24	210.5	113.4	2.2
LEN125-100-315E	15	158	22	205.5	110.6	2.2

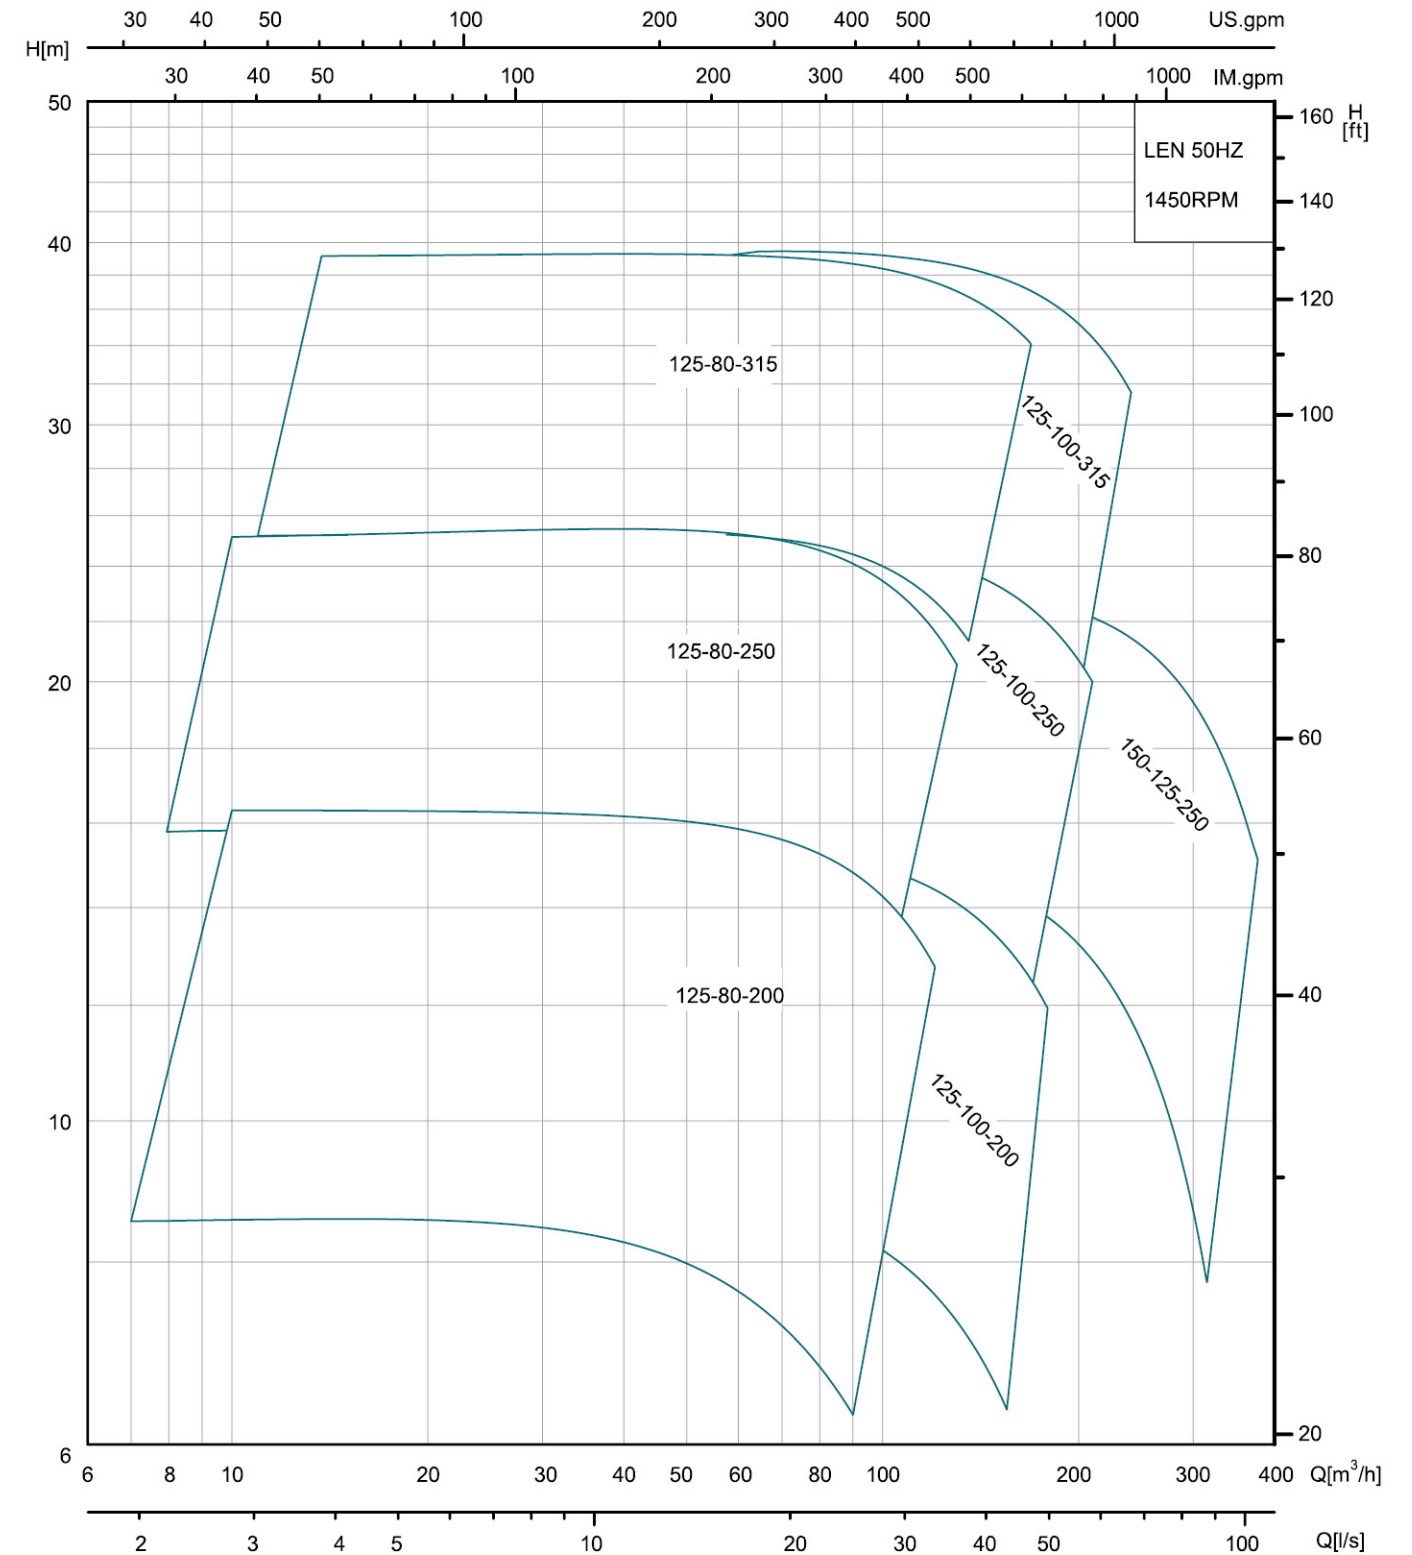

Hydraulic Performance Curves

LEN125-80-200



1450r/min

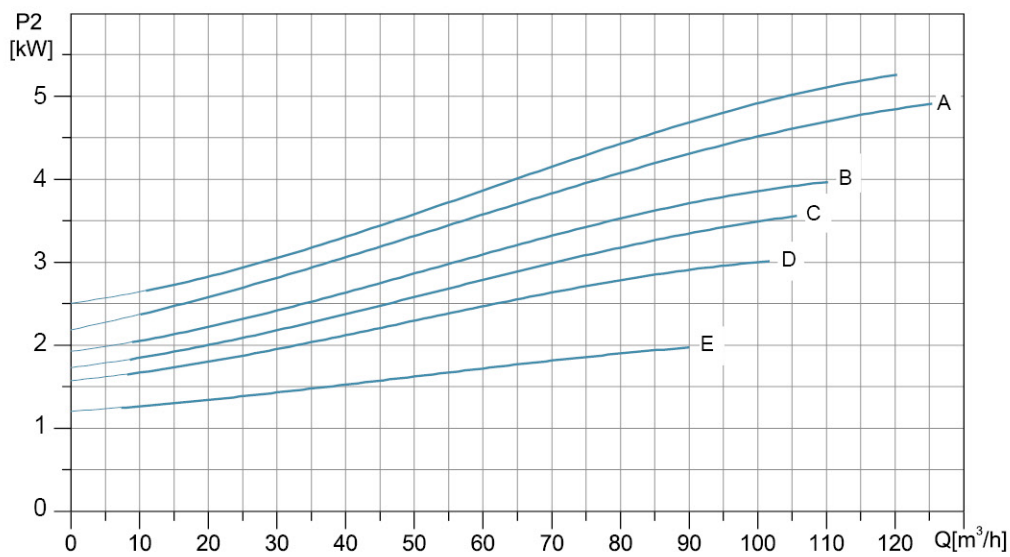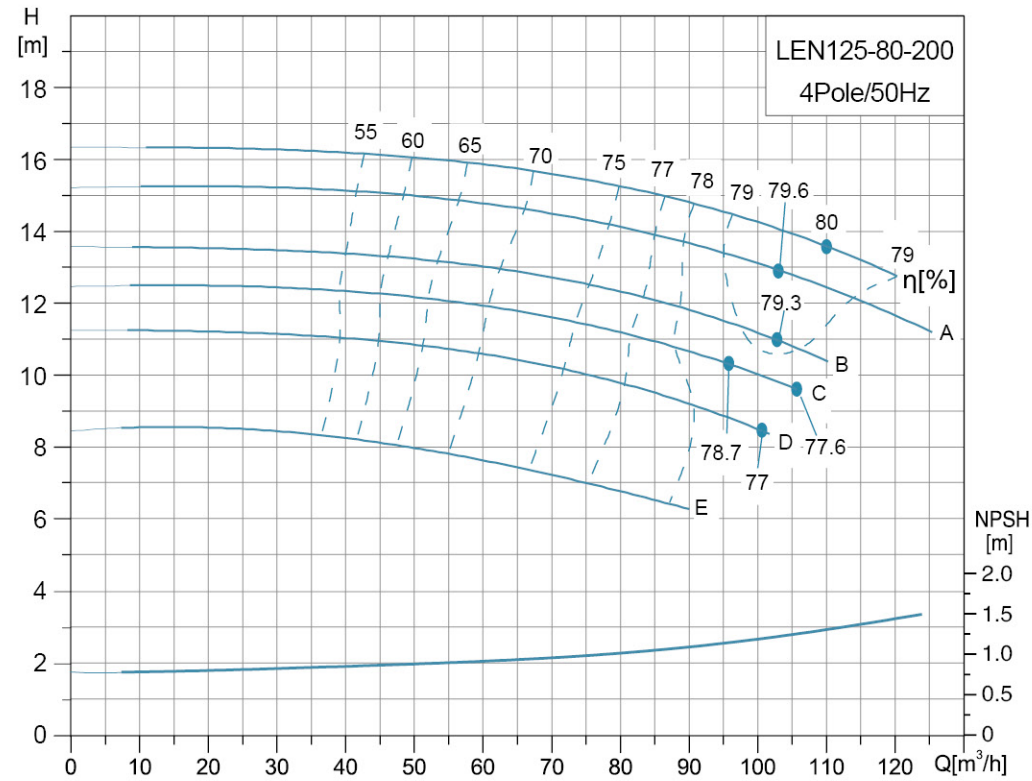

Hydraulic Performance Curves

LEN125-100-200



1450r/min

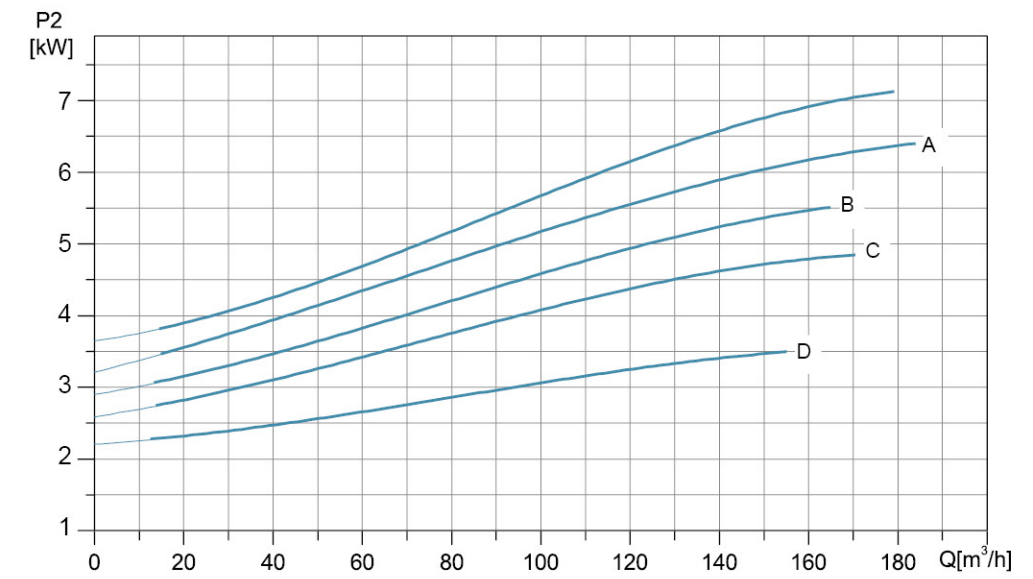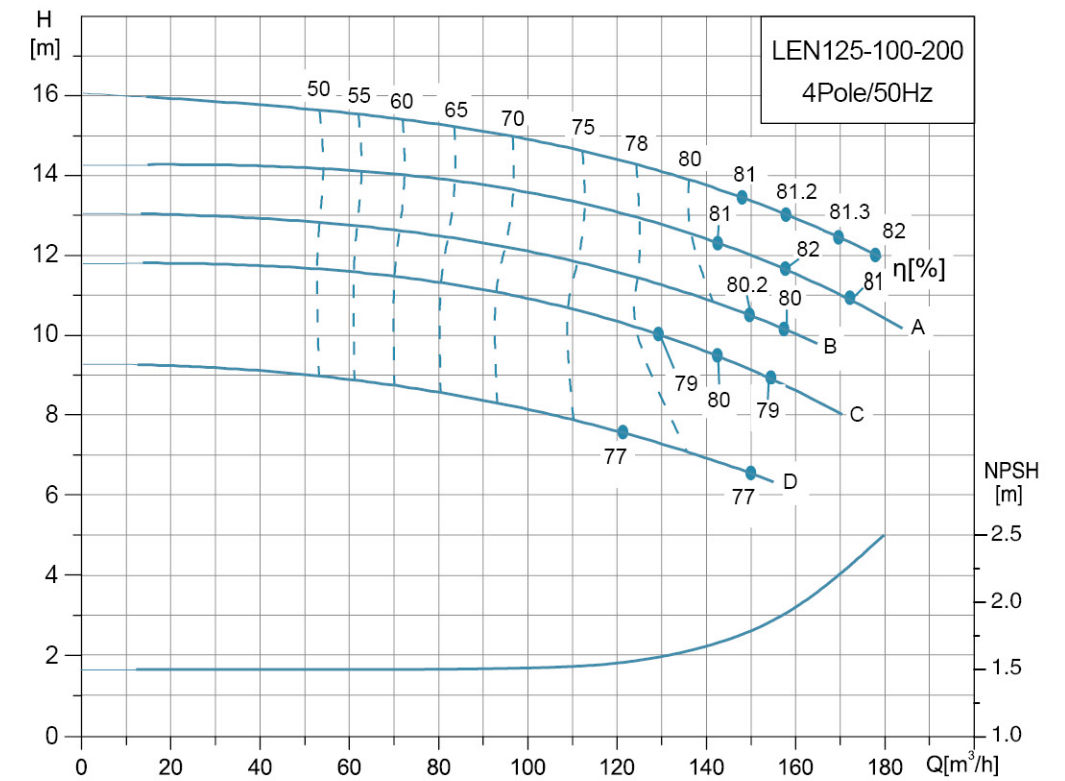

Hydraulic Performance Curves

LEN125-80-250



1450r/min

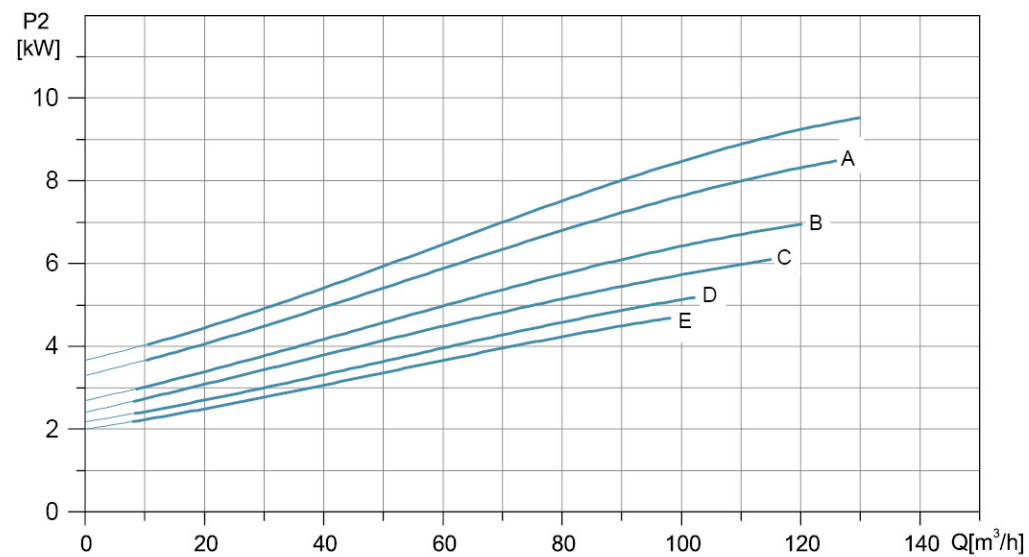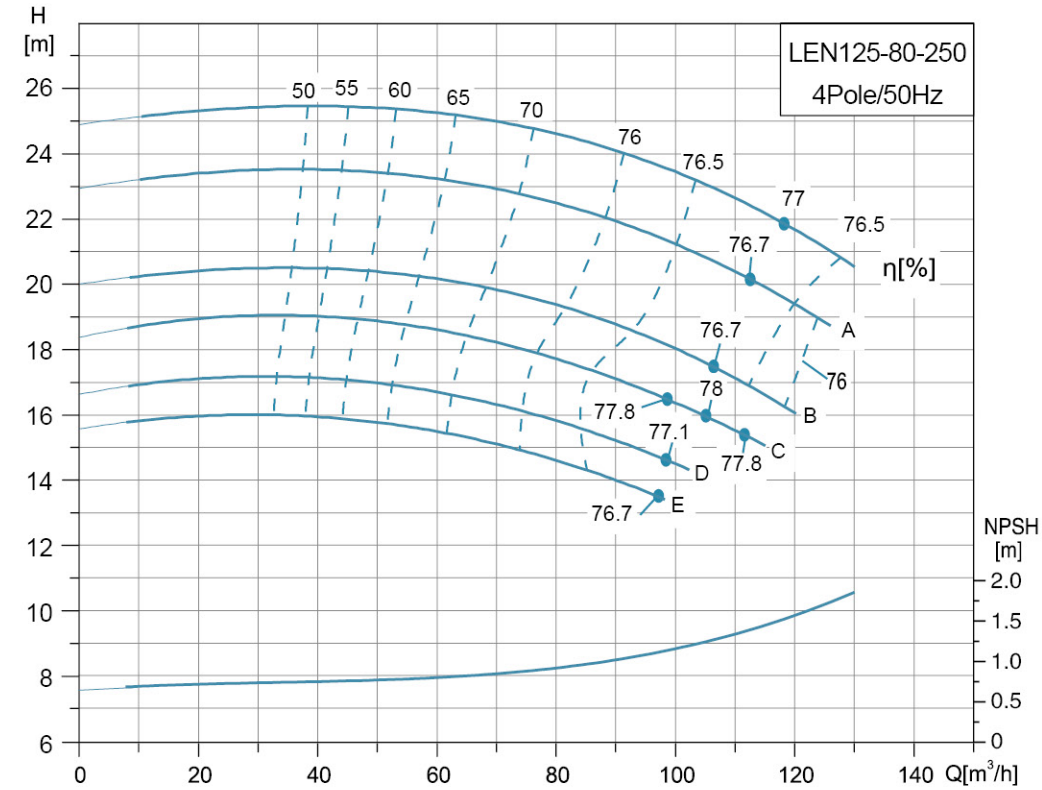

Hydraulic Performance Curves

LEN125-100-250


1450r/min

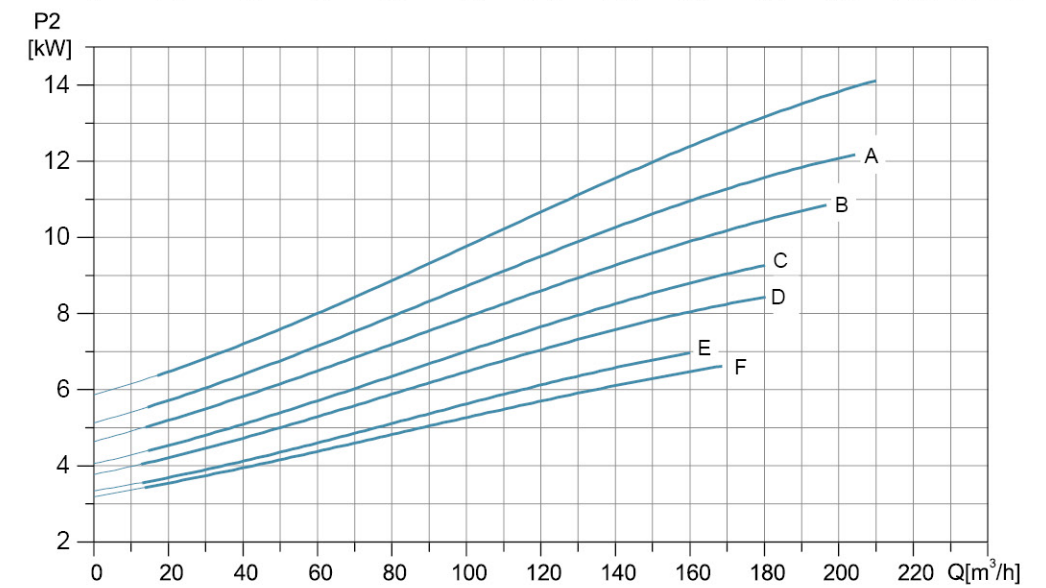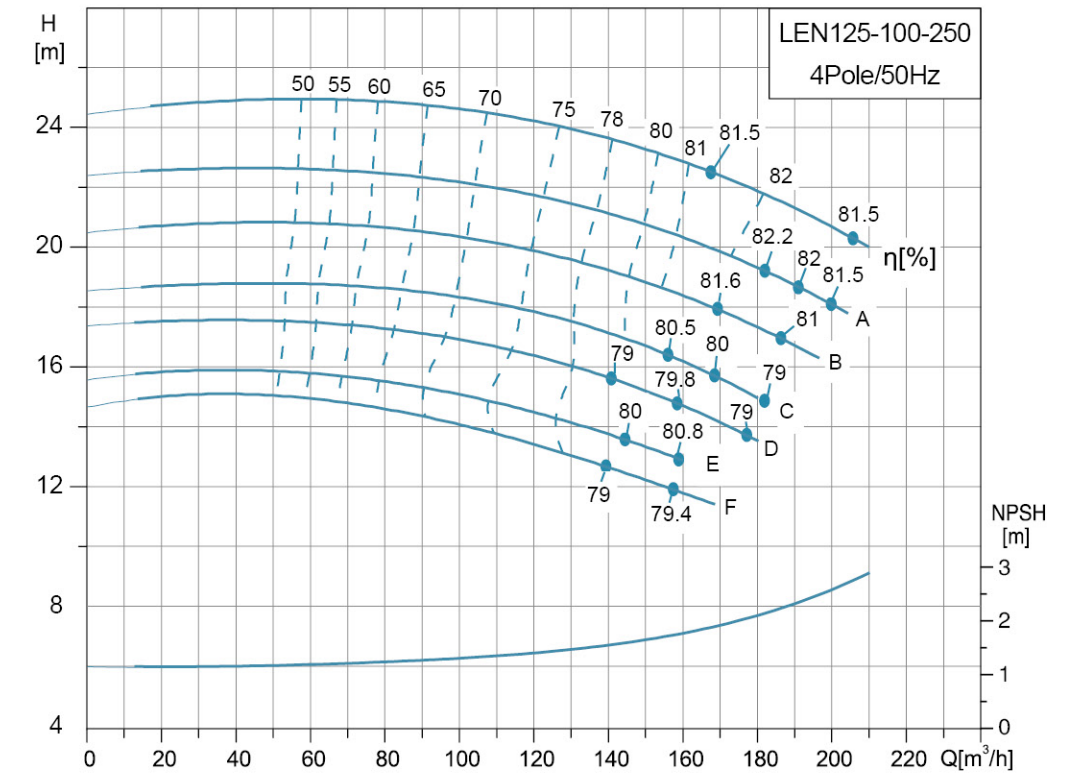

Hydraulic Performance Curves

LEN125-80-315


1450r/min

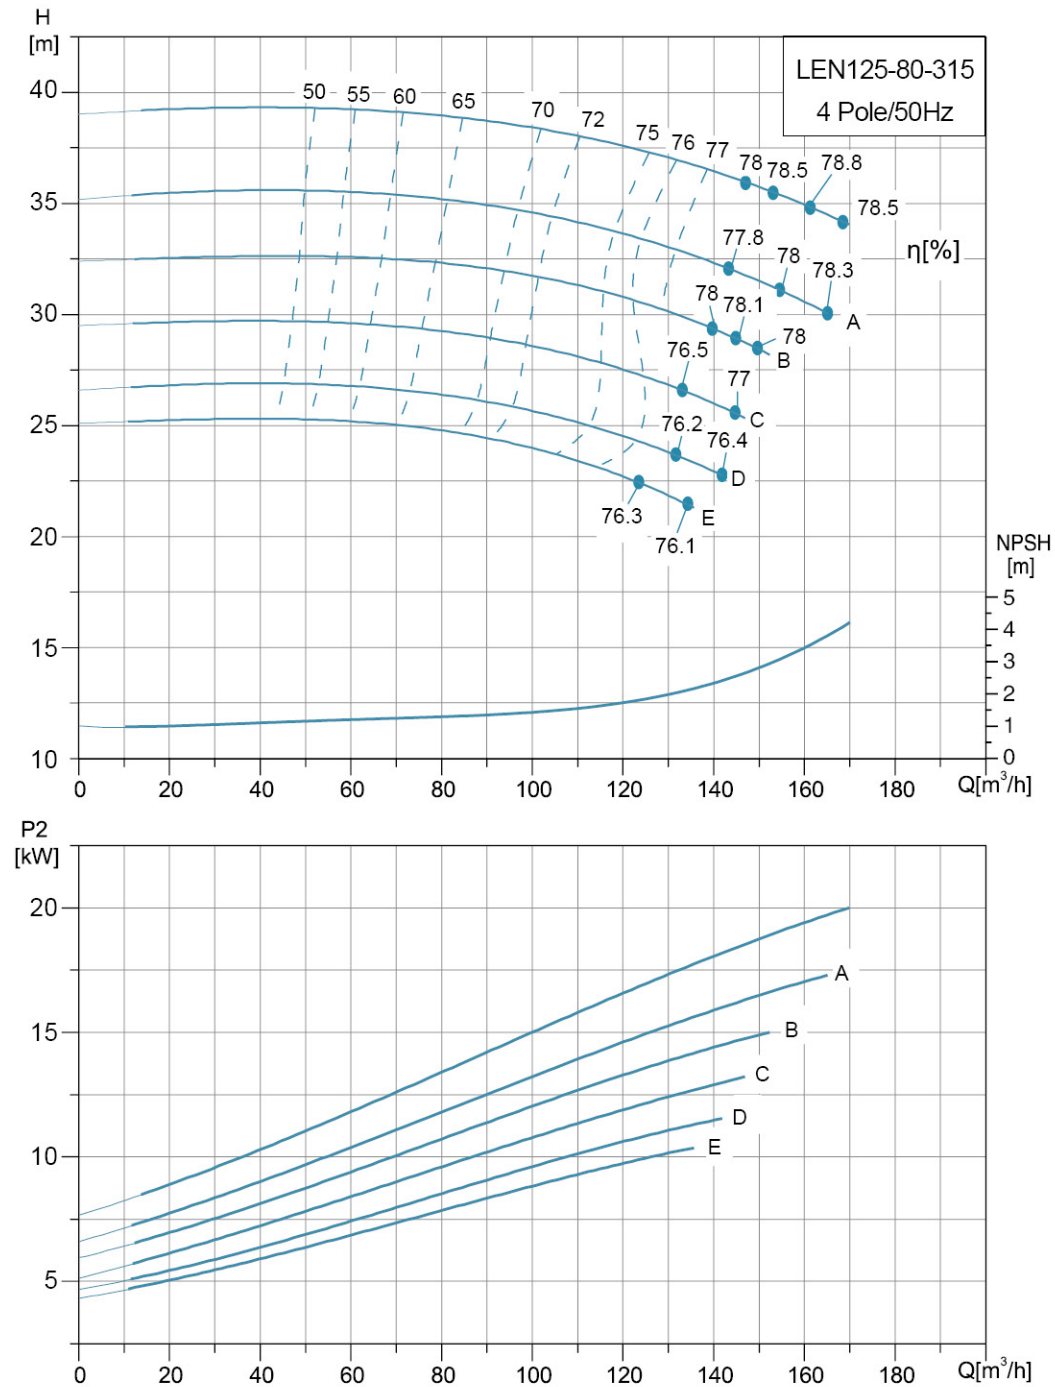

Hydraulic Performance Curves



LEN125-100-315

1450r/min

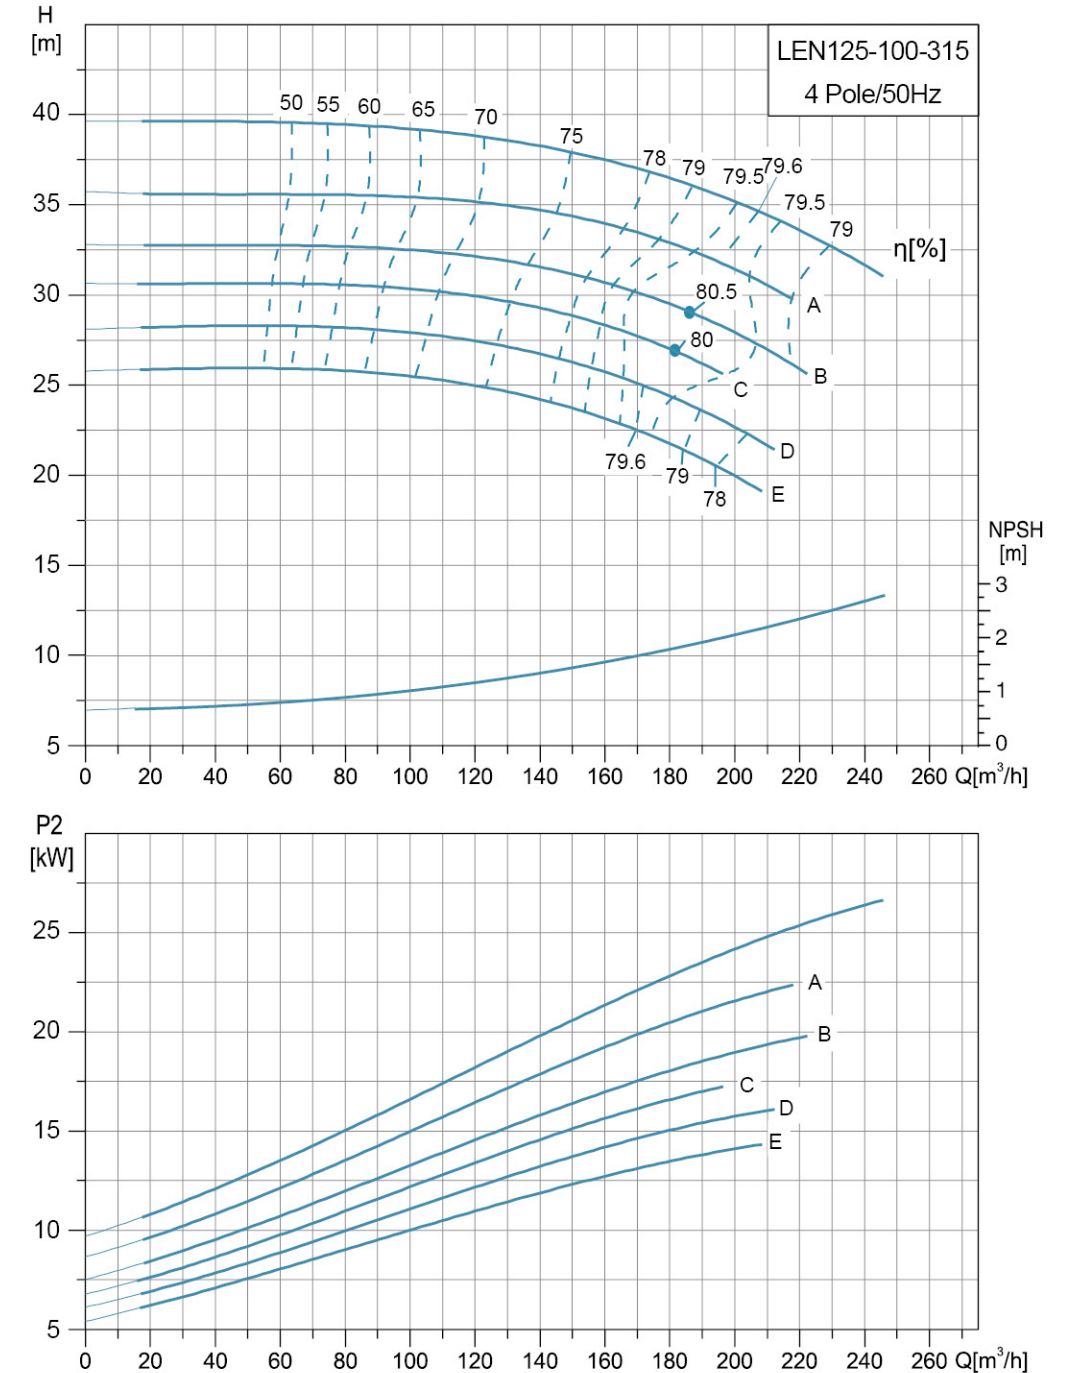


Hydraulic Performance Curves

LEN150-125-250 | **1450r/min**

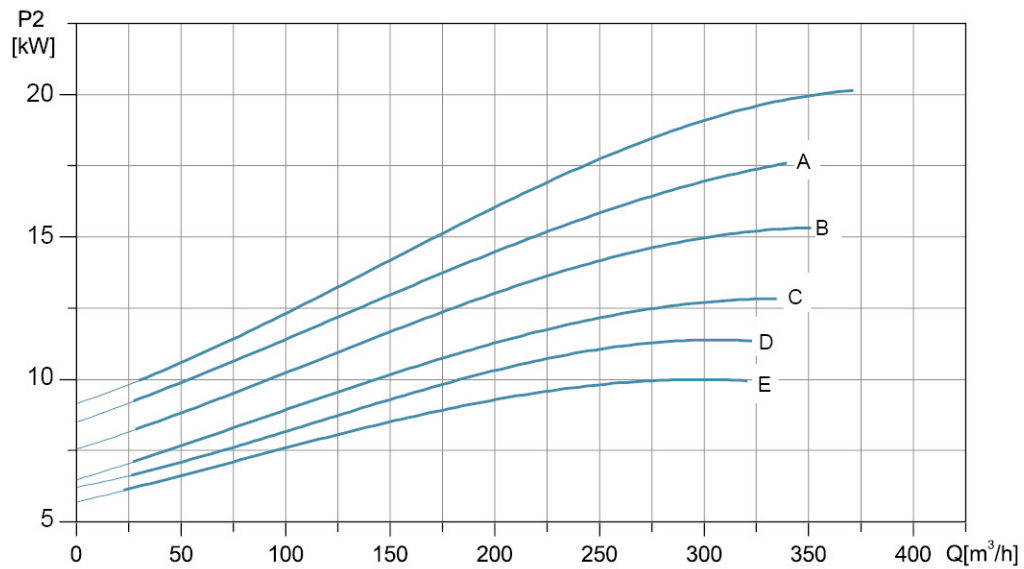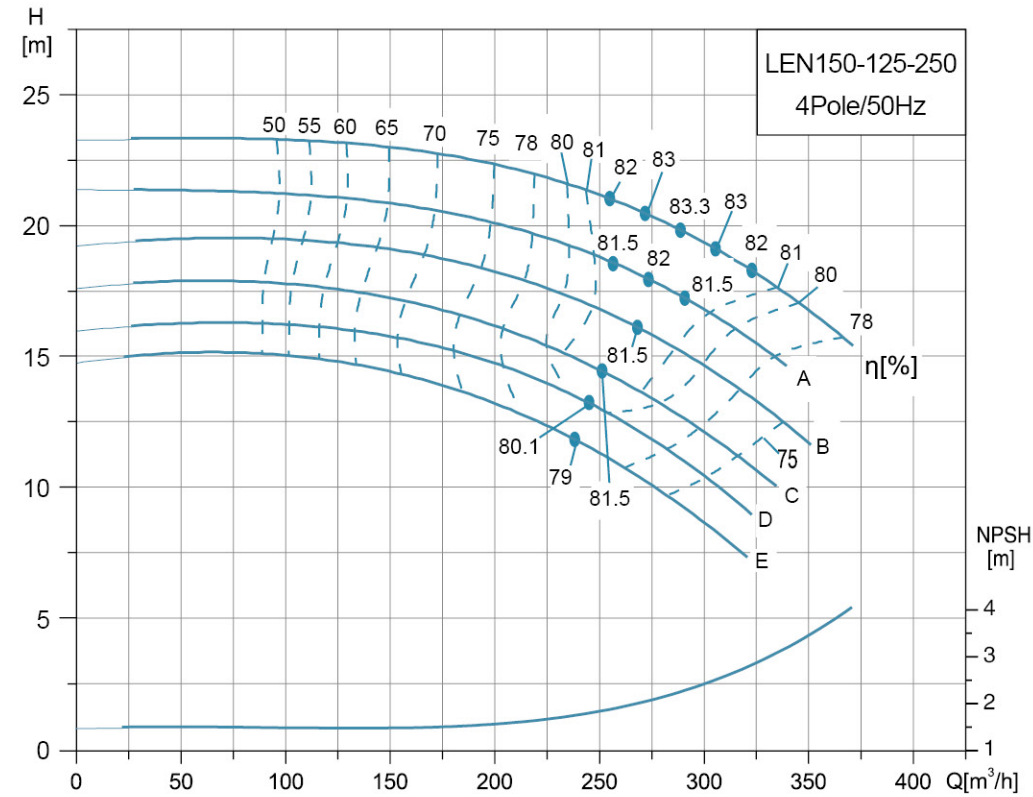

Pump Size

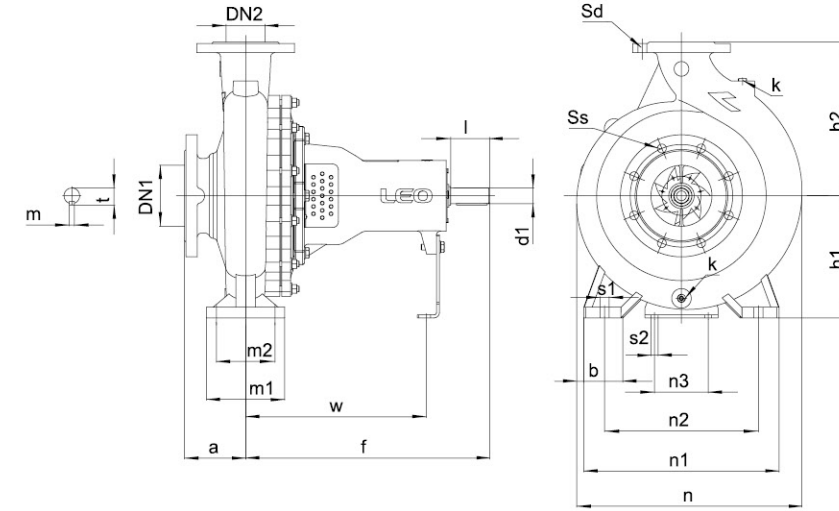

Model	DN1	DN2	a	f	h1	h2	b	m1	m2	n	n1	n2	n3	w	s1	s2	d1	l	m	t	Sd	Ss	k
LEN125-80-200																							
LEN125-80-200A																							
LEN125-80-200B					180	250	65	125	95	368	345	280			14								
LEN125-80-200C																							
LEN125-80-200D																							
LEN125-80-200E																							
LEN125-80-250																							
LEN125-80-250A																							
LEN125-80-250B		80			225	280				408													
LEN125-80-250C																							
LEN125-80-250D																							
LEN125-80-250E		125																					
LEN125-80-315																							
LEN125-80-315A																							
LEN125-80-315B					250	315				462													
LEN125-80-315C																							
LEN125-80-315D																							
LEN125-80-315E		125																					
LEN125-100-200																							
LEN125-100-200A																							
LEN125-100-200B					200					390	360	280											
LEN125-100-200C				500																			
LEN125-100-200D																							
LEN125-100-250																							
LEN125-100-250A					280	80	160	120															
LEN125-100-250B																							
LEN125-100-250C					225					423													
LEN125-100-250D		100																					
LEN125-100-250E																							
LEN125-100-250F																							
LEN125-100-315																							
LEN125-100-315A																							
LEN125-100-315B																							
LEN125-100-315C																							
LEN125-100-315D																							
LEN125-100-315E																							
LEN150-125-250					250																		
LEN150-125-250A																							
LEN150-125-250B		150	125		355					476													
LEN150-125-250C																							
LEN150-125-250D																							
LEN150-125-250E																							

Pump Range



● Peripheral Pump



● Self-Priming Peripheral Pump



● Jet Pump



● Jet Pump for Deep Wells



● Centrifugal Pump



● Multistage Centrifugal Pump



● Self-Priming Centrifugal Pump




● Stainless Steel Multistage Centrifugal Pump



● Stainless Steel Centrifugal Pump



● Submersible Pump



● Stainless Steel Submersible Pump



● Stainless Steel Submersible Sewage Pump



● Flexible Shaft Pump



● Domestic Lifting Station



● Pool Pump



● Garden Submersible Pump



● Garden Jet Pump




● Pressure Booster System



● Fountain Pump



● Standard Centrifugal Pump



● Submersible Borehole Pump



● Gasoline/Diesel Water Pump



● Booster Pump/Circulation Pump


Pump Range



● Submersible Sewage Pump



● Submersible Sewage Pump



● Submersible Dewatering Pump



● Submersible Slurry Pump



● Stainless Steel Vertical Multistage Pump



● Stainless Steel Horizontal Multistage Pump



● Semi-open Impeller Stainless Steel Centrifugal Pump



● Stainless Steel Standard Centrifugal Pump



● Pressure Booster System



● Vertical In-line Pump



● Bare Shaft End Suction Centrifugal Pump



● End Suction Centrifugal Pump